


# SK-3DN1615

High light transmittance, environmental protection grade silicone material, integrated extrusion molding process. Unique optical light distribution structure design, uniform lighting surface and no shadow. IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV. Excellent toughness, simple and stylish appearance, delicate and unique



## Dimension

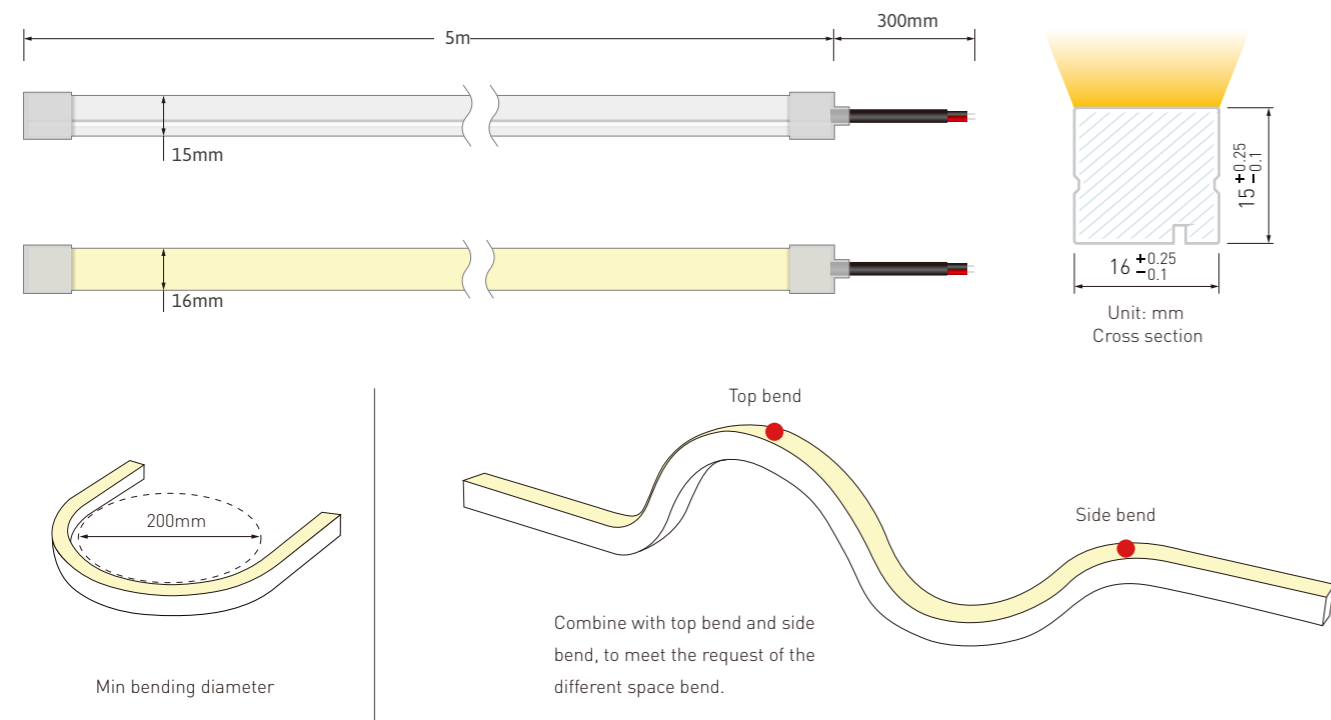

### Note:

- Max. run length refers to single side feed in serial connection.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- The given color temperature is the temperature of finished product.



 Voltage 24v DC	 UV Protection	 Consistency One Bin
 Length 5M	 Waterproof Grade IP 67	 Warranty 3 Years

## Single color PARAMETER




CCT(K)	CRI	Voltage	Power(W)	Lumen (LM/M)	Efficiency (LM/W)	Unit Length (mm)	Max.Run Length (M)	CC/CV
2100K±150	≥90	DC24V	10	600	60	50	5	CC/CV
2400K±150	≥90	DC24V	10	630	63	50	5	CC/CV
2700K±150	≥90	DC24V	10	670	67	50	5	CC/CV
3000K±150	≥90	DC24V	10	700	70	50	5	CC/CV
3500K±200	≥90	DC24V	10	730	73	50	5	CC/CV
4000K $+400$ $-200$	≥90	DC24V	10	730	73	50	5	CC/CV
5000K $+500$ $-300$	≥90	DC24V	10	750	75	50	5	CC/CV
6500K $+200$ $-600$	≥90	DC24V	10	730	73	50	5	CC/CV
Red	--	DC24V	10	310	31	50	5	CC/CV
Green	--	DC24V	10	530	53	50	5	CC/CV
Blue	--	DC24V	10	140	14	50	5	CC/CV
Yellow	--	DC24V	10	260	26	50	5	CC/CV
Pink	--	DC24V	10	480	48	50	5	CC/CV

## Cable Entry

### Silicone end cap



Front Cable Entry:  
The cable could be hidden in all directions by the flexible design.




Side Cable Entry:  
The cable could be perfectly hidden to achieve seamless



Bottom Cable Entry:  
The cable could be perfectly hidden to achieve seamless



### Integral end cap



Front Cable Entry:  
The cable could be hidden in all directions by the flexible design.



## Accessories

### Mounting Clips




Dimension:  
20x12.6x16.8mm

### Aluminium Mounting clips




Dimension:  
20x20.5x17.6

### Aluminium Profile



Dimension:  
1000x20.5x17.6

### Curved aluminium profile



Dimension:  
51.4x30.4x15mm

### Suspension Installation

