



Magnetic track lighting system



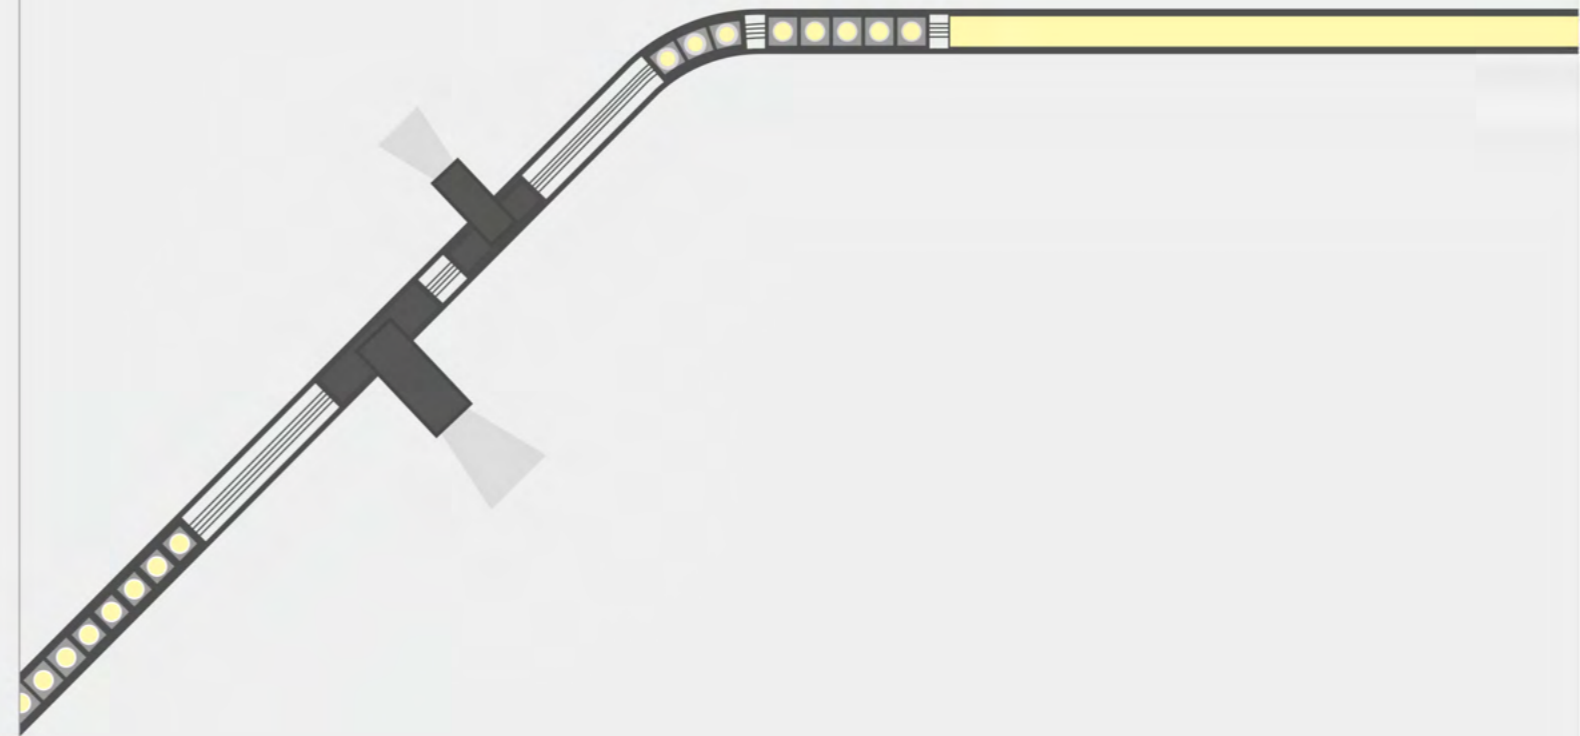

Magnet Durability

The magnet we use is NdFeB rare-earth permanent magnet, it's the most powerful magnet on the earth. The model is N35, 3600 (+-10%) Gauss, Working temperature up to 80°C, Curie temperature is 240°C (failure at this temperature).

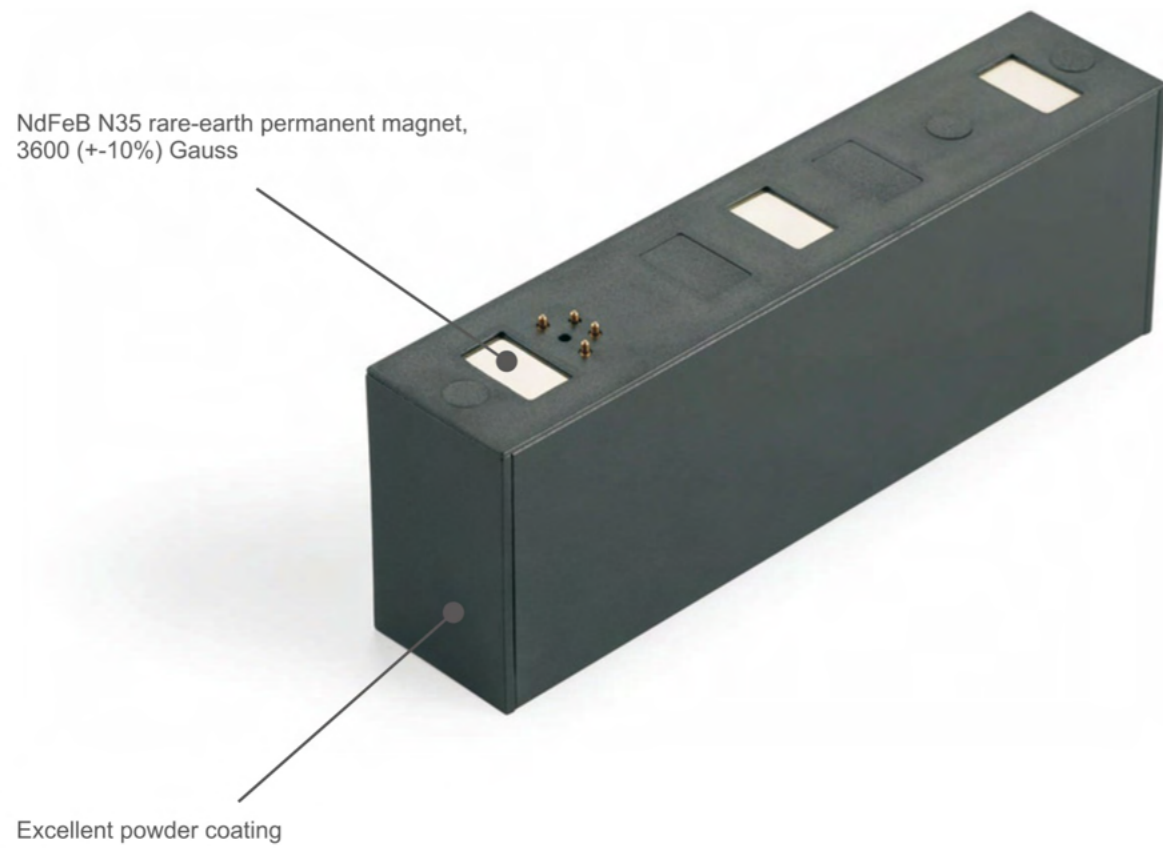


Perfect Surface treatment

The surface treatment offers perfect strong adhesion finishing to protect the fixtures from moisture. In addition, the strong corrosion resistance and good heat conduction and dissipations ensure the fixtures effectiveness. The coating is with special powder to ensure the flawless finishing.

Research & Developments

We are constantly searching & testing technologies to offer the best natural lighting in our fixtures.

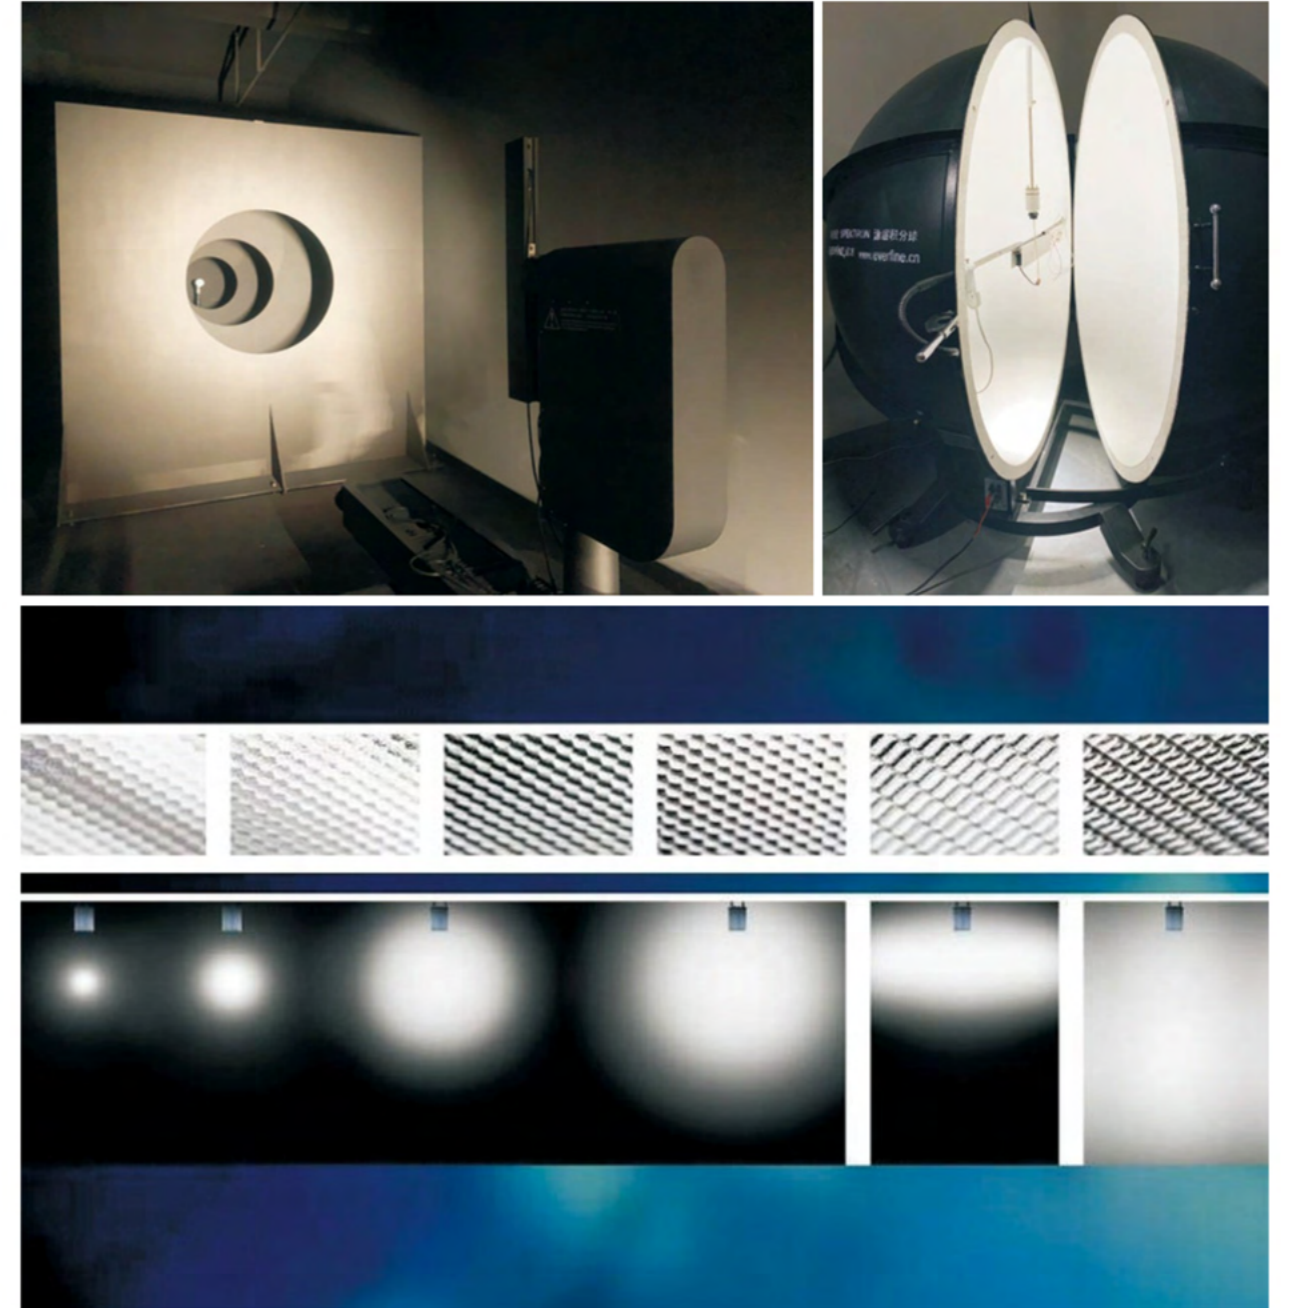




TWO DESIGNS

Two sizes of magnetic system to fit all your spaces.

The 39 mm tracks offer lighting fixtures that have higher power & luminance to fit spaces with higher ceilings.

The 27.5 mm tracks are our newest slimmer editions offering seamless designs that look great in residential spaces.



39mm / 1.5 Inch



27.5mm / 1 Inch







Various Installations:

surface/recessed/pendant





- Black
- White
- Golden
- Black bronze

Seamless connection

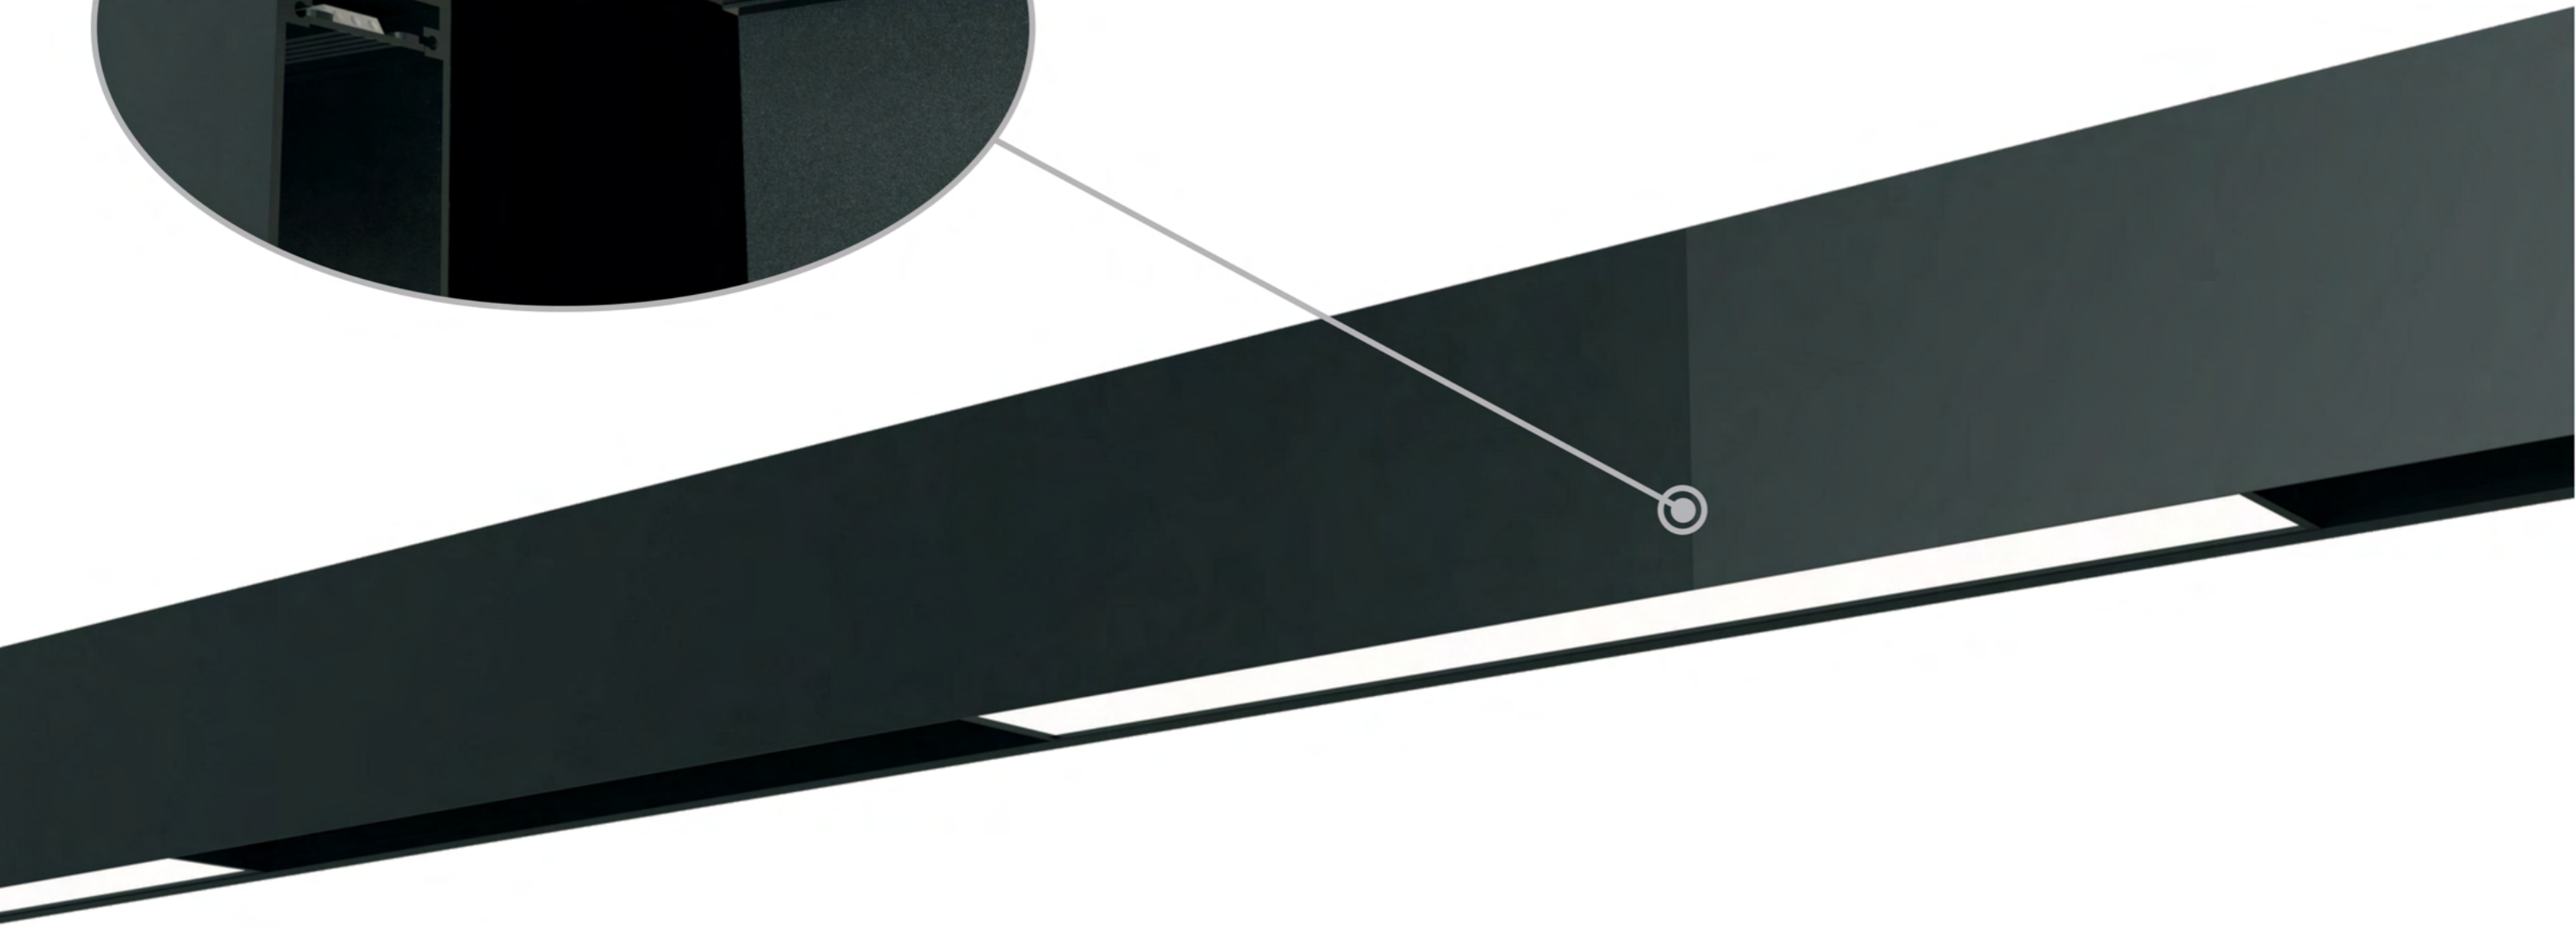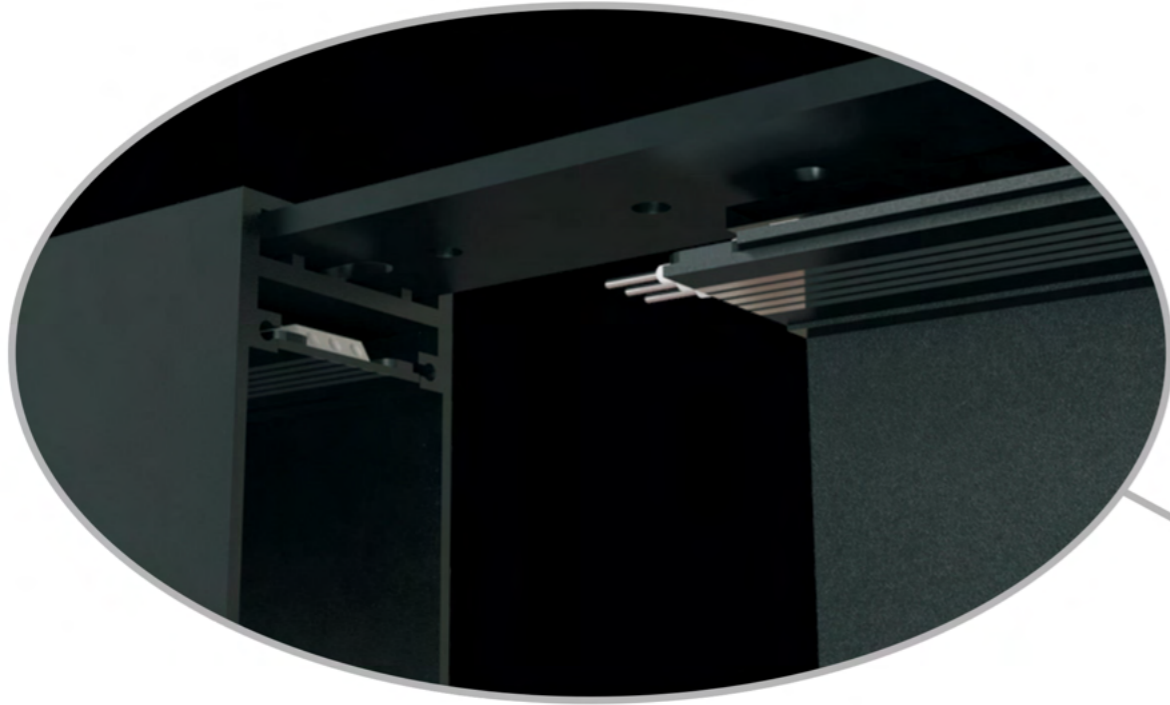

STANDARD



series

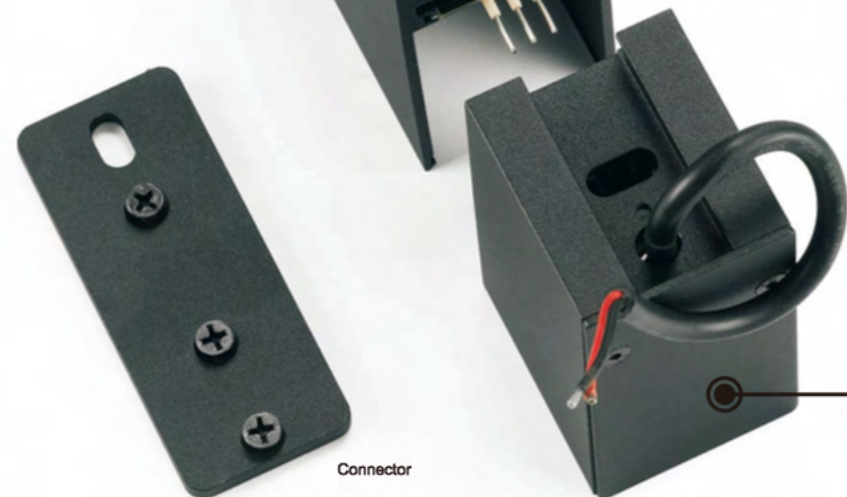




Model	Power	Install	Length
1 Meter profile	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile	200W max	Surface/Pendant/Recessed	2000mm
3 Meter profile	200W max	Surface/Pendant/Recessed	3000mm

Sandy Black
 Sandy White
 Golden
 Black bronze

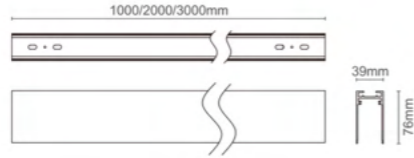

Model	Power	Install	Length
1 Meter profile-R	200W max	Recessed	1000mm
2 Meter profile-R	200W max	Recessed	2000mm
3 Meter profile-R	200W max	Recessed	3000mm

Sandy Black
 Sandy White




CORNER


L Corner



Inner Corner

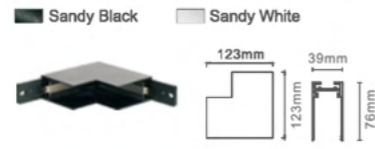


Outer Corner

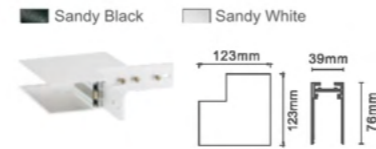


T corner



45D corner

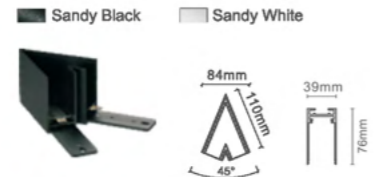


CROSS corner

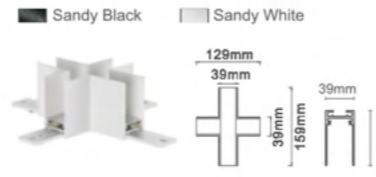

CORNER


L Corner-R

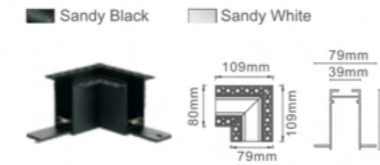


Inner Corner-R



Outer Corner-R

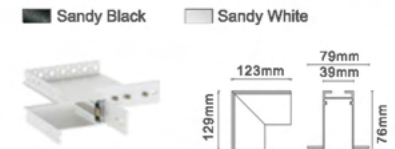


T Corner-R

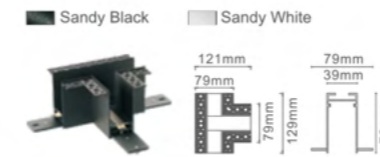

POWER FEED

Input terminal


Sandy Black
 Sandy White



POWER FEED


Input terminal-R

Sandy Black
 Sandy White




ACCESSORIES


Pendant kit-A

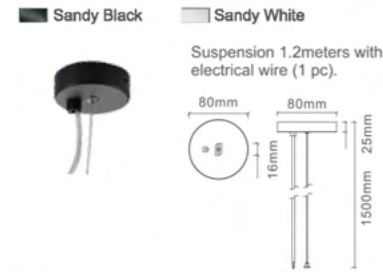

Pendant kit-B

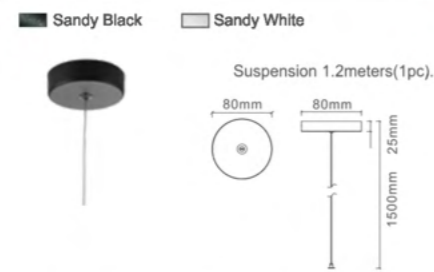


Pendant kit-C

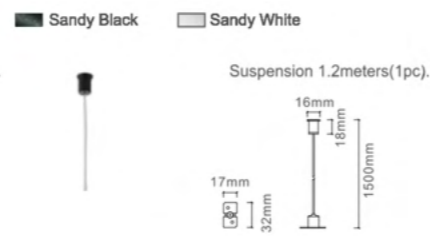

Track connector



Power plate 65mm

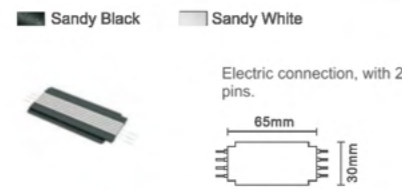


Pin



Track cover




Track driver box

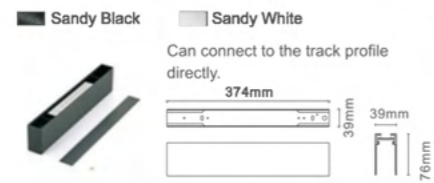

Driver box




End cap

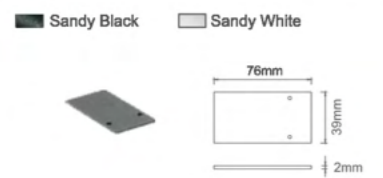

New surface mounted kits



Recessed kit

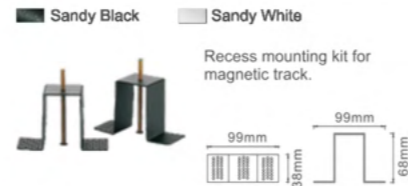



DOT01



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
2W	> 90 > 80	< 3	3000K 2700K 4000K	12° 34° 48°	126Lm



LIGHT DISTRIBUTION
3000K 90Ra

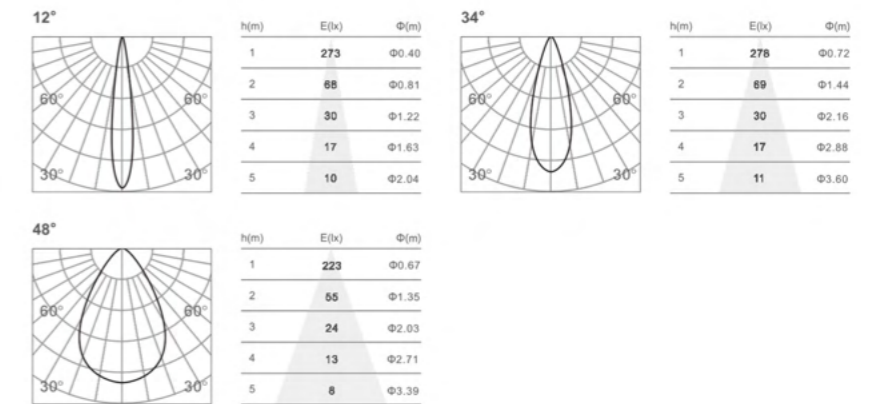



DOT03



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90 > 80	< 3	3000K 2700K 4000K	12° 34° 48°	382Lm



LIGHT DISTRIBUTION
3000K 90Ra

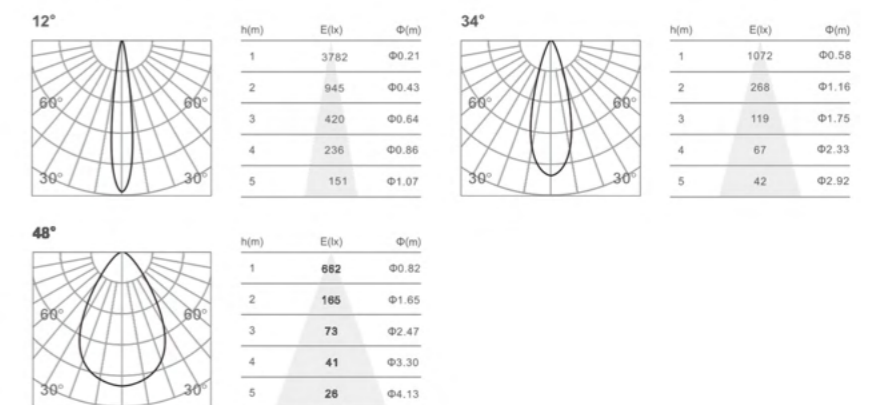



DOT06





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	12°	733Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

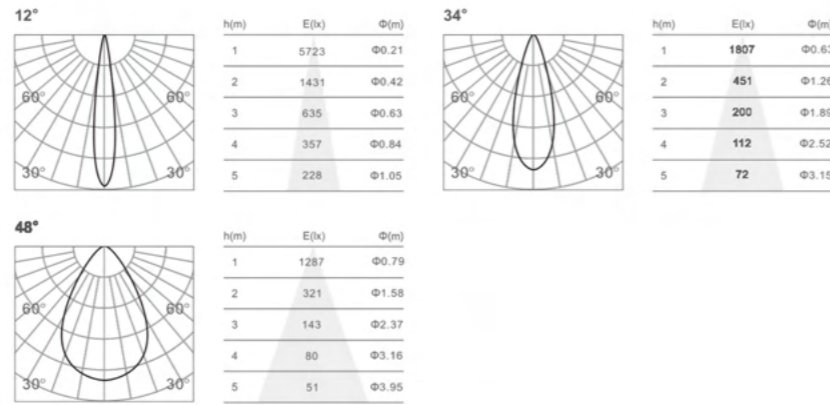

DOT12






POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	12°	1440Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

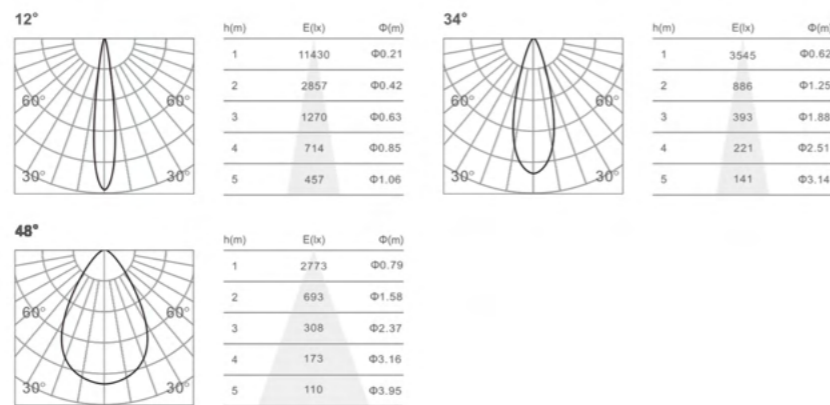

Linear08






POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90	< 3	3000K	Diffuse	223Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

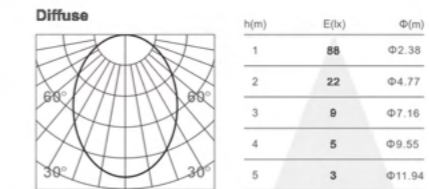

Linear16




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
7W	> 90	< 3	3000K	Diffuse	488Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

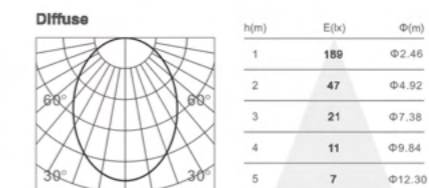




Linear32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 90	< 3	3000K	Diffuse	895Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION 3000K 90Ra

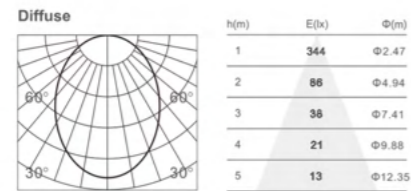


Linear96




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
39W	> 90	< 3	3000K	Diffuse	2550Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION 3000K 90Ra

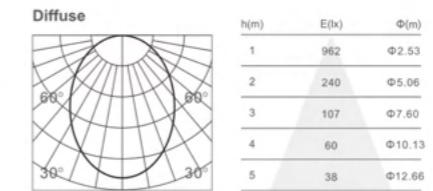


Linear64




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
26W	> 90	< 3	3000K	Diffuse	1720Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION 3000K 90Ra

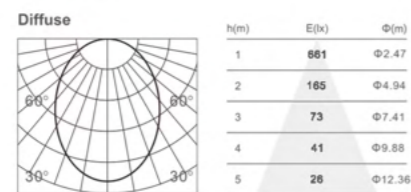




Fold03




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90	< 3	3000K	12°	382Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION 3000K 90Ra

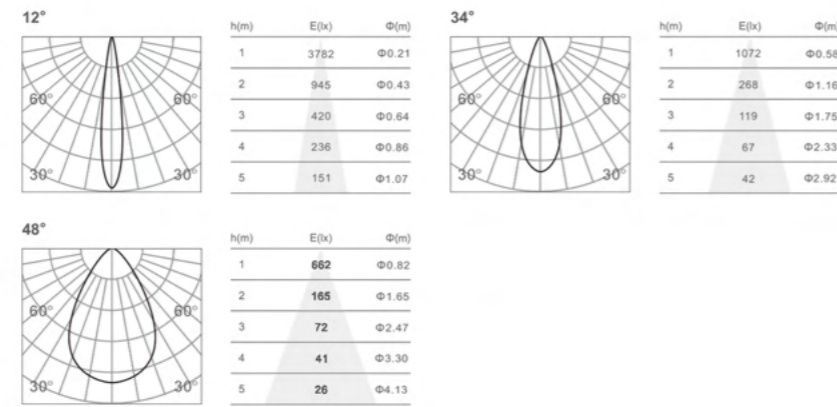


Fold12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	12°	1440LM
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION 3000K 90Ra

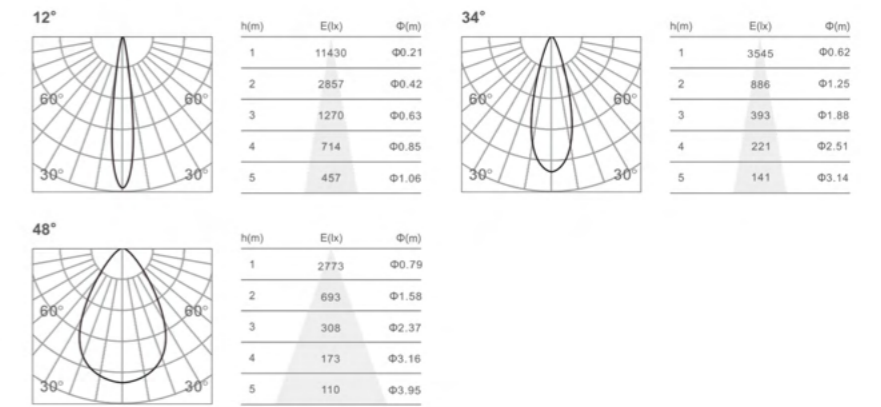


Fold06




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	12°	733Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION 3000K 90Ra

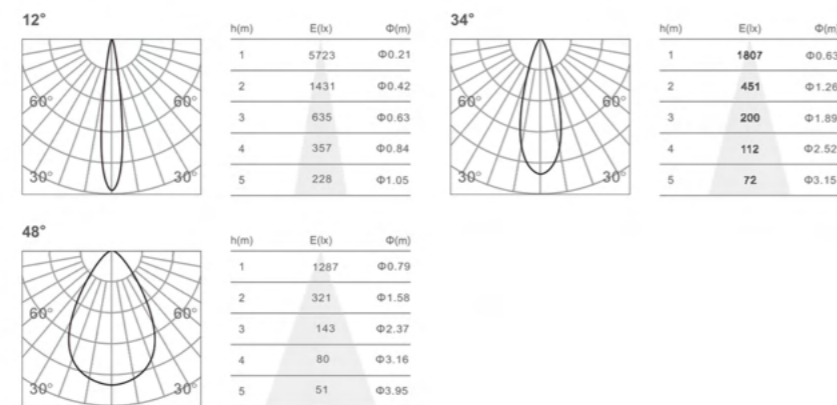




Fold08




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90	< 3	3000K	Diffuse	223Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION 3000K 90Ra

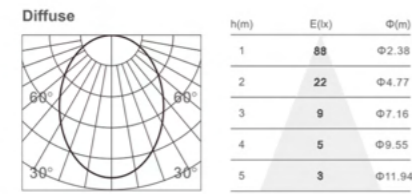


Fold32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	Diffuse	1270Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION 3000K 90Ra

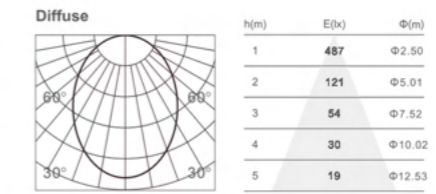


Fold16




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	Diffuse	488Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION 3000K 90Ra

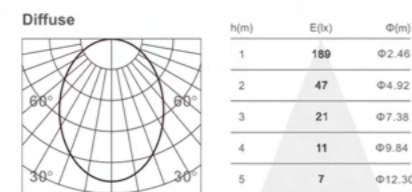





Washer13



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	wallwasher	480Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION 3000K 90Ra

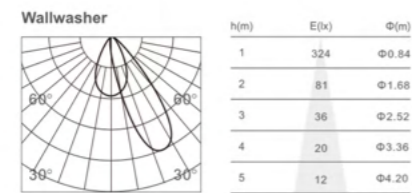



Out32



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 90	< 3	3000K	Diffuse	895Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION 3000K 90Ra

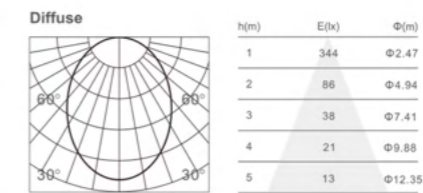



Washer27



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	wallwasher	1055Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION 3000K 90Ra

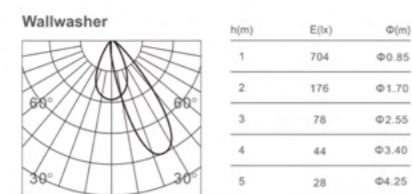



Out12



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	12°	1435Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White


LIGHT DISTRIBUTION 3000K 90Ra

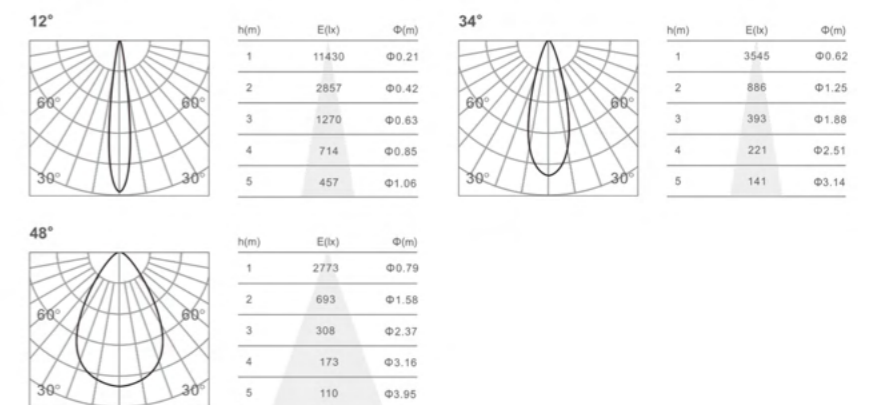

ADAPTERS

5 Adapters

Same spotlight heads + 5 kinds of adapters = 5 different system

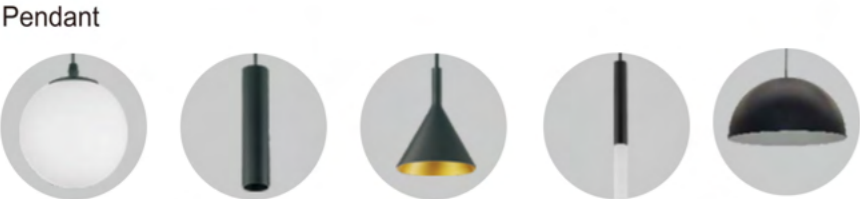



Spot35




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 90	< 3	3000K	20°	526Lm
	> 80		2700K	30°	
			4000K	40°	


■ Sandy Black □ Sandy White ■ Golden

LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	3146	Φ0.34
2	786	Φ0.68
3	349	Φ1.02
4	196	Φ1.36
5	125	Φ1.71




h(m)	E(lx)	Φ(m)
1	3121	Φ0.36
2	780	Φ0.72
3	346	Φ1.08
4	195	Φ1.45
5	124	Φ1.81




h(m)	E(lx)	Φ(m)
1	1963	Φ0.43
2	490	Φ0.87
3	218	Φ1.30
4	122	Φ1.74
5	78	Φ2.17


STANDARD




MINI



STANDARD CURVY



MINI CURVY



Spot35-T




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
2x5W	> 90	< 3	3000K	20°	526Lm
	> 80		2700K	30°	
			4000K	40°	


■ Sandy Black □ Sandy White ■ Golden

LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	3146	Φ0.34
2	786	Φ0.68
3	349	Φ1.02
4	196	Φ1.36
5	125	Φ1.71




h(m)	E(lx)	Φ(m)
1	3121	Φ0.36
2	780	Φ0.72
3	346	Φ1.08
4	195	Φ1.45
5	124	Φ1.81




h(m)	E(lx)	Φ(m)
1	1963	Φ0.43
2	490	Φ0.87
3	218	Φ1.30
4	122	Φ1.74
5	78	Φ2.17


STANDARD




MINI



STANDARD CURVY



MINI CURVY





Spot65-R




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	10°	251Lm
	> 80		2700K	20°	
			4000K	30°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

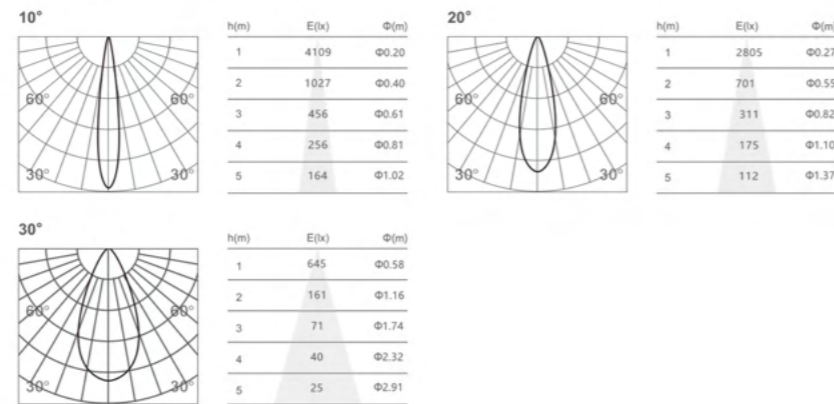


STANDARD




MINI



STANDARD CURVY



MINI CURVY



Spot92-R




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 90	< 3	3000K	10°	481Lm
	> 80		2700K	20°	
			4000K	30°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

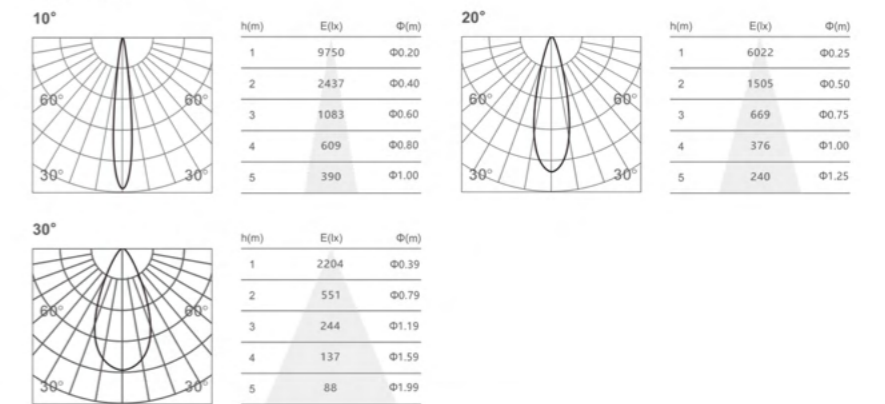


STANDARD




MINI



STANDARD CURVY



MINI CURVY





Spot50




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 90	< 3	3000K	18°	682Lm
	> 80		2700K	24°	
			4000K	36°	

■ Sandy Black □ Sandy White ■ Golden

LIGHT DISTRIBUTION


3000K 90Ra

18°




h(m)	E lx	Φ(m)
1	4902	Φ0.32
2	1226	Φ0.65
3	544	Φ0.98
4	306	Φ1.31
5	196	Φ1.63

24°




h(m)	E lx	Φ(m)
1	4186	Φ0.39
2	1047	Φ0.79
3	465	Φ1.19
4	261	Φ1.58
5	167	Φ1.98

36°




h(m)	E lx	Φ(m)
1	2077	Φ0.64
2	519	Φ1.29
3	230	Φ1.94
4	129	Φ2.58
5	83	Φ3.23


STANDARD




MINI



STANDARD CURVY



MINI CURVY





Spot35-SQ




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	15°	365Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

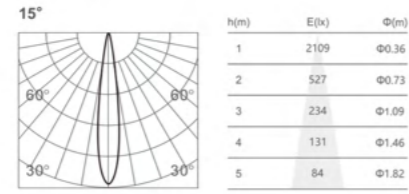


STANDARD




MINI



STANDARD CURVY



MINI CURVY



Spot50-SQ




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 90	< 3	3000K	18°	688Lm
	> 80		2700K	24°	
			4000K	36°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

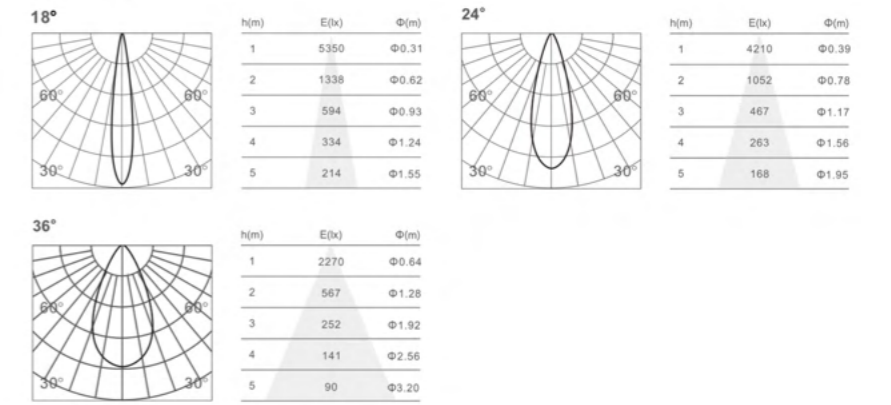


STANDARD




MINI



STANDARD CURVY



MINI CURVY





Spot70




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
20W	> 90	< 3	3000K	18°	1343Lm
	> 80		2700K	24°	
			4000K	36°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

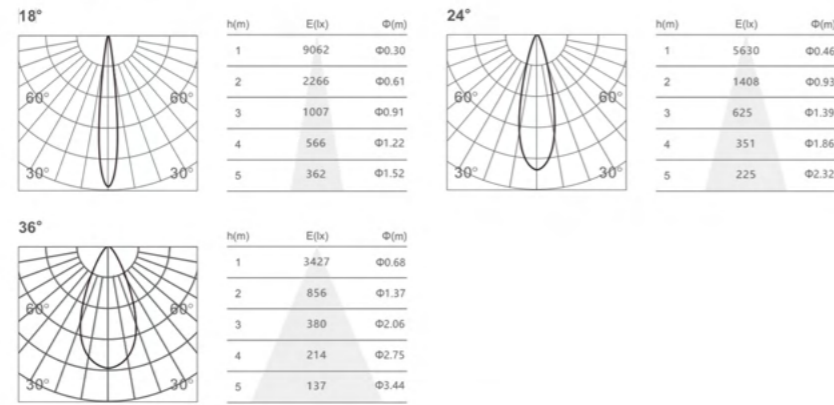


STANDARD




MINI



STANDARD CURVY



MINI CURVY



Zoom55




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 90	< 3	3000K	20°-60°	800Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

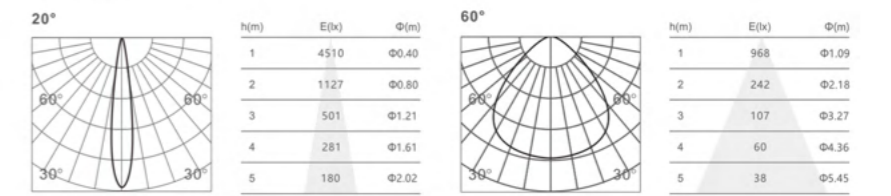


STANDARD




MINI





STANDARD CURVY




MINI CURVY



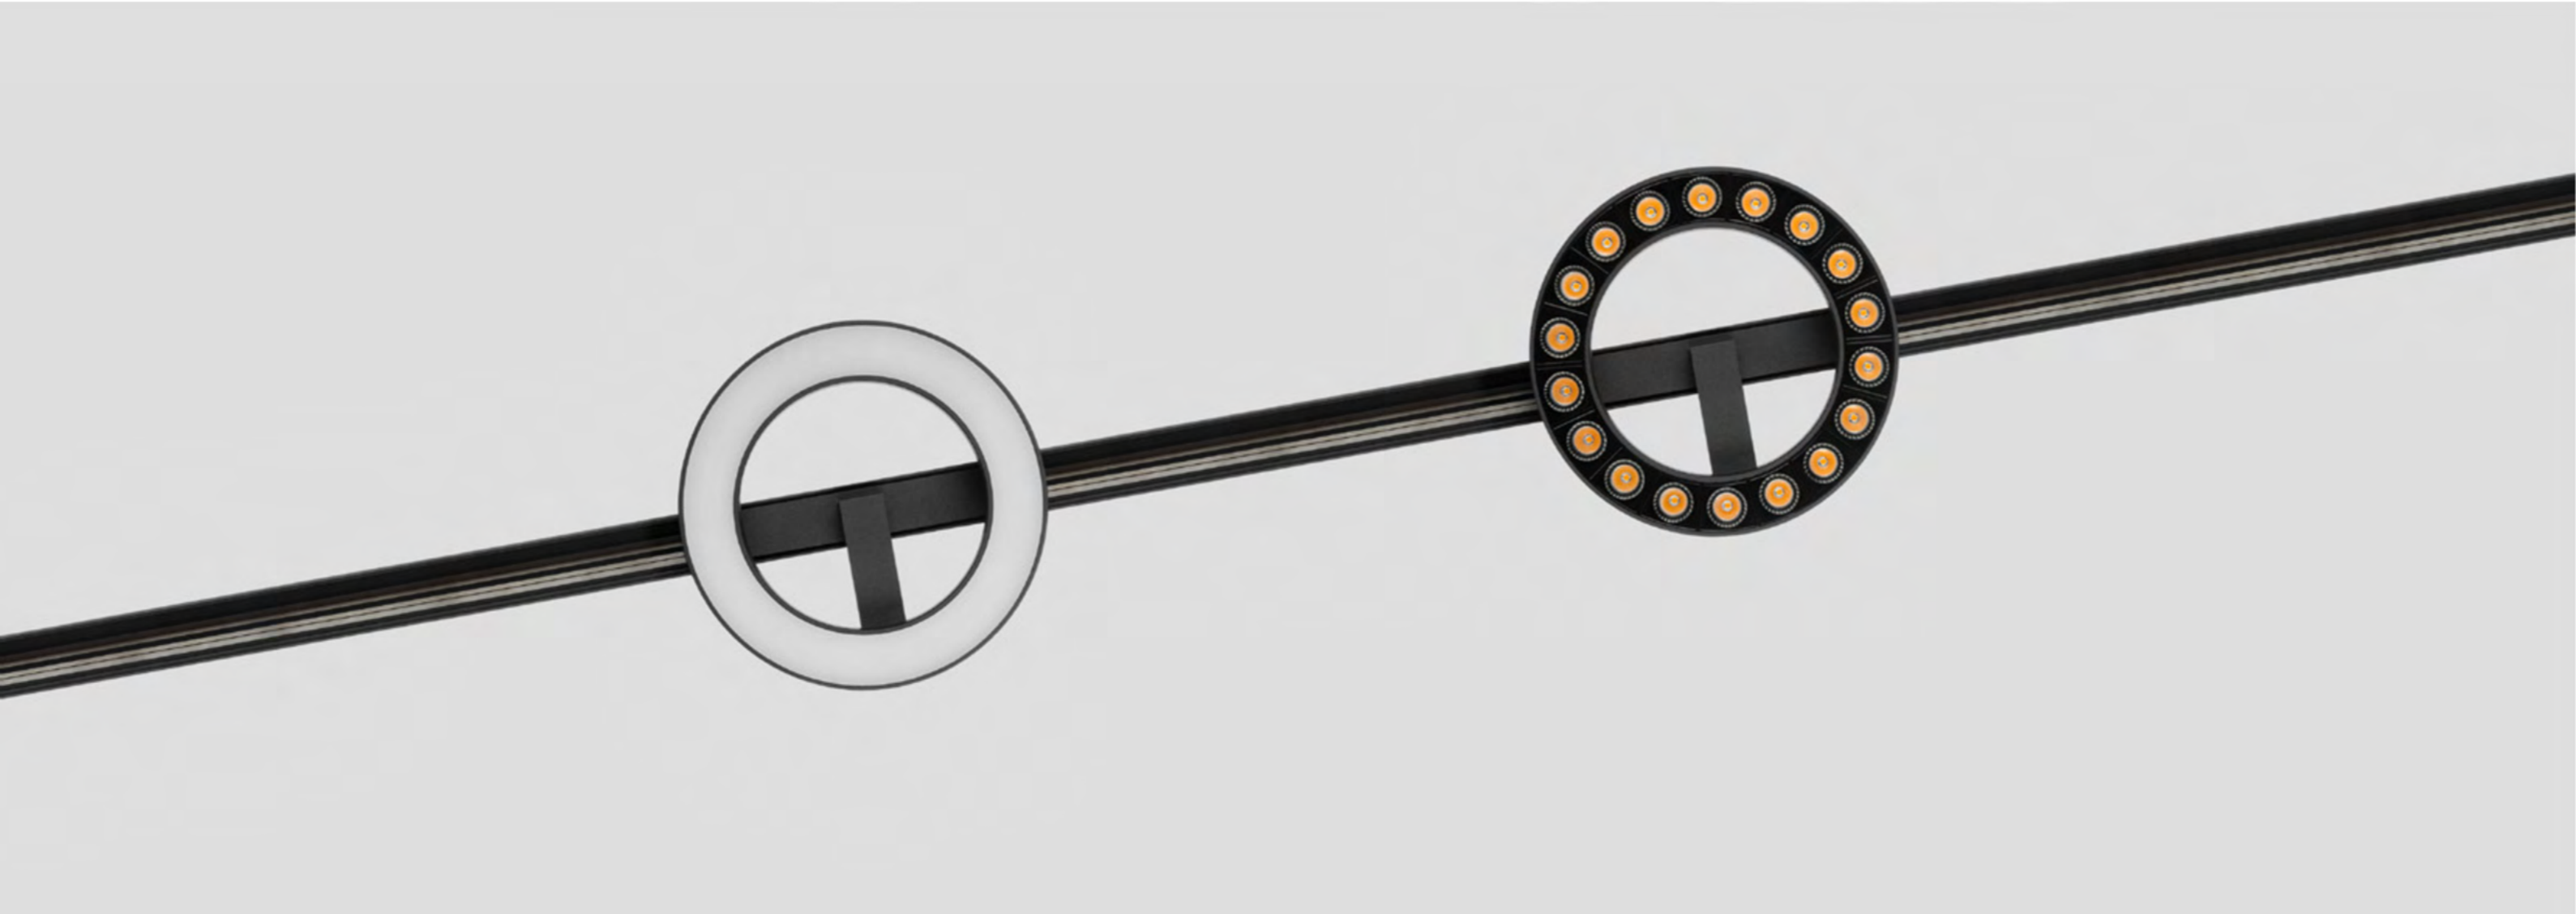


Angle adjustment

Halo spot

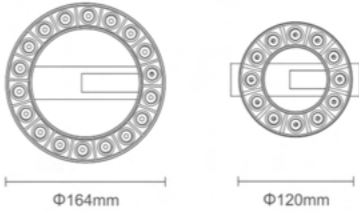

Halo linear

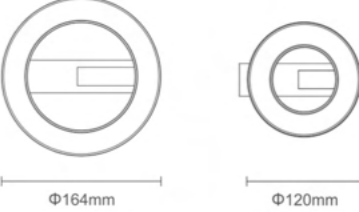



Halo-D18




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 90	< 3	3000K	20°	1562Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

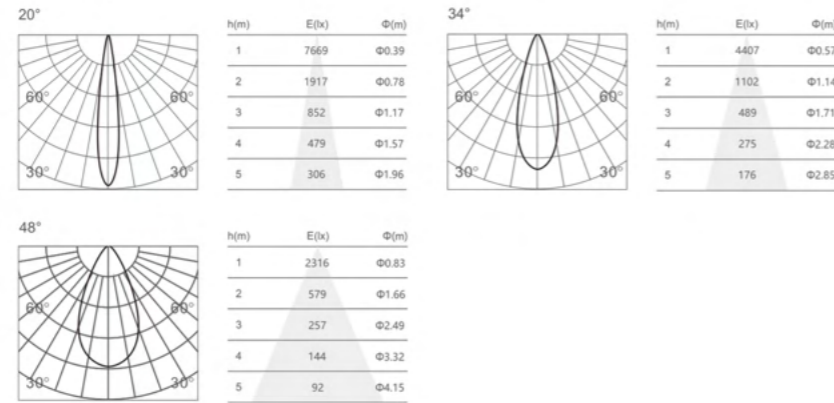


STANDARD




MINI



STANDARD CURVY



MINI CURVY



Halo-L16




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 90	< 3	3000K	Diffuse	686Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

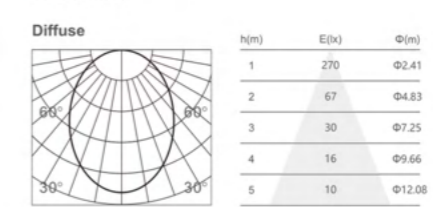


STANDARD




MINI



STANDARD CURVY



MINI CURVY





Halo-D12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90	< 3	3000K	20°	950Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

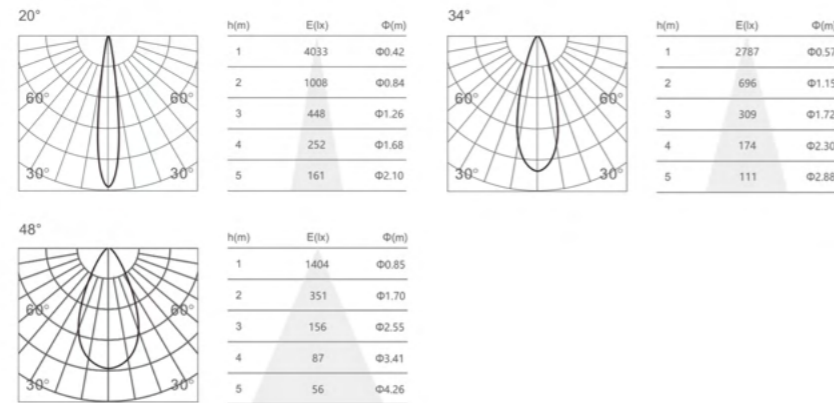


STANDARD




MINI



STANDARD CURVY



MINI CURVY



Halo-L12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90	< 3	3000K	Diffuse	470Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

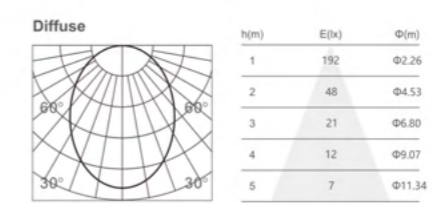


STANDARD




MINI



STANDARD CURVY



MINI CURVY



ADAPTERS | Pendant series





Pendant35-R




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 90	< 3	3000K	20°	526Lm
	> 80		2700K	30°	
			4000K	40°	


■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze

LIGHT DISTRIBUTION


3000K 90Ra

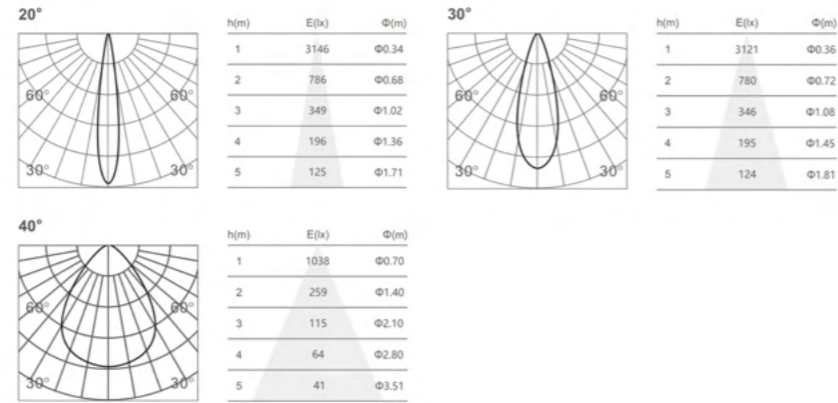


STANDARD




MINI



STANDARD CURVY



MINI CURVY



Pendant50-R




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 90	< 3	3000K	18°	682Lm
	> 80		2700K	24°	
			4000K	36°	


■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze

LIGHT DISTRIBUTION


3000K 90Ra

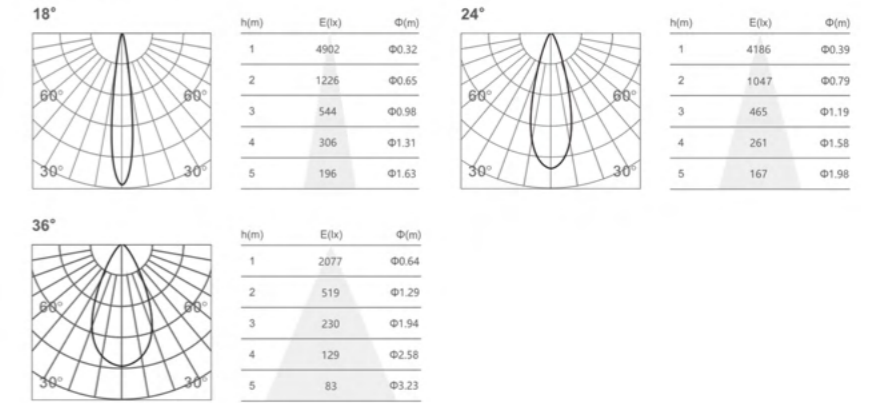


STANDARD




MINI



STANDARD CURVY



MINI CURVY





Pendant35-R-A-10




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 90	< 3	3000K	20°	460Lm
	> 80		2700K		
			4000K		

Sandy Black
 Sandy White
 Golden
 Black bronze

LIGHT DISTRIBUTION


3000K 90Ra

20°




h(m)	E(lx)	Φ(m)
1	501	Φ0.43
2	125	Φ0.87
3	55	Φ1.30
4	31	Φ1.74
5	20	Φ2.17


STANDARD




MINI



STANDARD CURVY



MINI CURVY



Pendant35-R-A-20




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 90	< 3	3000K	20°	460Lm
	> 80		2700K		
			4000K		

Sandy Black
 Sandy White
 Golden
 Black bronze

LIGHT DISTRIBUTION


3000K 90Ra

20°




h(m)	E(lx)	Φ(m)
1	184	Φ0.49
2	46	Φ0.99
3	20	Φ1.49
4	11	Φ1.99
5	7	Φ2.48


STANDARD




MINI



STANDARD CURVY



MINI CURVY





Pendant-glory




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	264Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra

Diffuse




h(m)	E(lx)	Φ(m)
1	333	Φ1.24
2	83	Φ2.48
3	37	Φ3.72
4	20	Φ4.96
5	13	Φ6.20


STANDARD




MINI



STANDARD CURVY



MINI CURVY





Pendant-global




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	346Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


2700K 90Ra

Diffuse




h(m)	E(lx)	Φ(m)
1	30	Φ2.00
2	7	Φ4.00
3	3	Φ6.00
4	1.9	Φ8.00
5	1.2	Φ10.00


STANDARD




MINI



STANDARD CURVY



MINI CURVY



Global




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	346Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


2700K 90Ra

Diffuse




h(m)	E(lx)	Φ(m)
1	30	Φ2.00
2	7	Φ4.00
3	3	Φ6.00
4	1.9	Φ8.00
5	1.2	Φ10.00


STANDARD




MINI



STANDARD CURVY




MINI CURVY





MINI



series

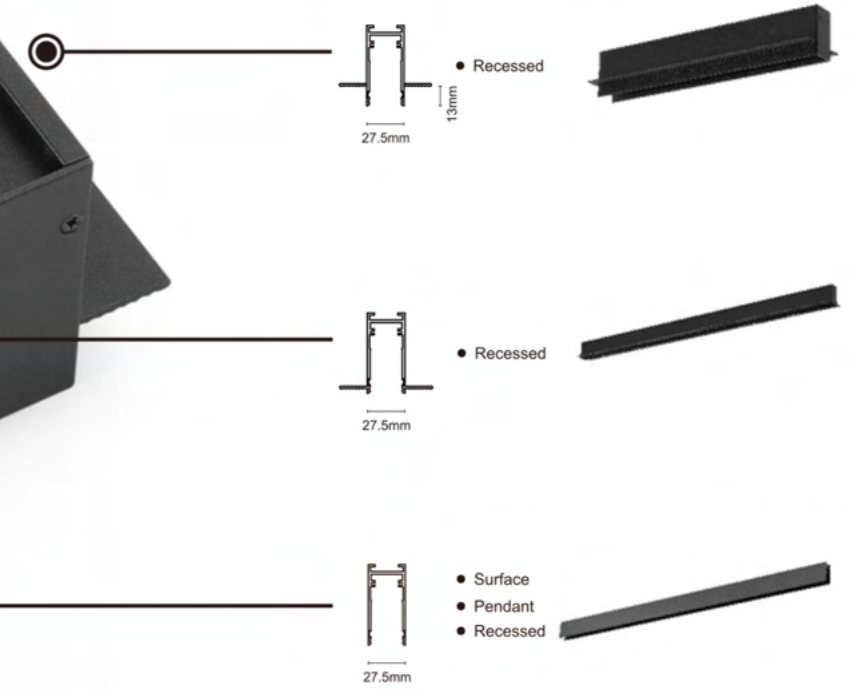




Model	Power	Install	Length
1 Meter profile	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile	200W max	Surface/Pendant/Recessed	2000mm
3 Meter profile	200W max	Surface/Pendant/Recessed	3000mm

Sandy Black
 Sandy White
 Golden
 Black bronze

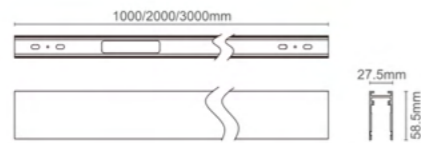

Model	Power	Install	Length
1 Meter profile-R-s	200W max	Recessed	1000mm
2 Meter profile-R-s	200W max	Recessed	2000mm
3 Meter profile-R-s	200W max	Recessed	3000mm


Sandy Black
 Sandy White



CORNER


L corner-s

Sandy Black
 Sandy White

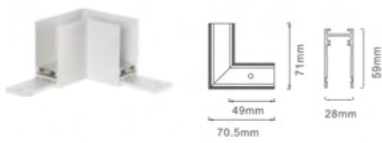


Inner corner-s

Sandy Black
 Sandy White

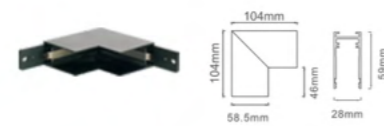


Outer corner-s

Sandy Black
 Sandy White

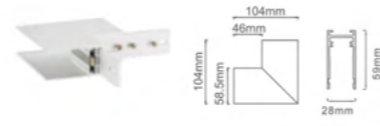

T corner-s

Sandy Black
 Sandy White

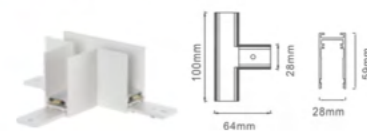

45D corner-s

Sandy Black
 Sandy White



Cross corner-s


Sandy Black
 Sandy White



CORNER


L corner-R-s

Sandy Black
 Sandy White

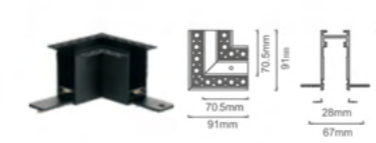


Inner corner-R-s

Sandy Black
 Sandy White

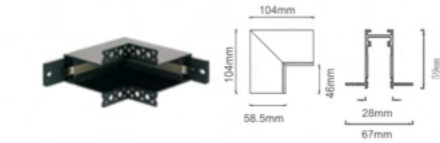


Outer corner-R-s

Sandy Black
 Sandy White

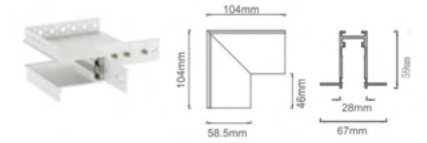

T corner-R-s


Sandy Black
 Sandy White

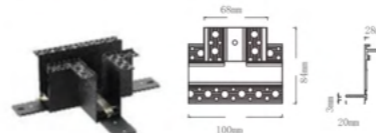



Model	Power	Install	Length
1 Meter profile-M-s	200W max	Recessed	1000mm
2 Meter profile-M-s	200W max	Recessed	2000mm
3 Meter profile-M-s	200W max	Recessed	3000mm

■ Sandy Black □ Sandy White

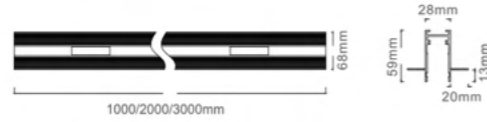


Dot06-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
6W	> 90 > 80	< 3	3000K 2700K 4000K	20° 34° 48°	510Lm

■ Sandy Black □ Sandy White




LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	2563	Φ0.37
2	640	Φ0.74
3	284	Φ0.92
4	160	Φ1.236
5	102	Φ15.4



h(m)	E(lx)	Φ(m)
1	1863	Φ0.43
2	465	Φ0.87
3	207	Φ1.31
4	116	Φ1.75
5	74	Φ2.19




h(m)	E(lx)	Φ(m)
1	1139	Φ0.37
2	284	Φ0.74
3	126	Φ1.12
4	71	Φ1.49
5	45	Φ1.86

CORNER


L Corner-M-s

■ Sandy Black □ Sandy White




Inner Corner-M-s

■ Sandy Black □ Sandy White

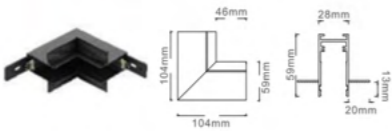

Outer Corner-M-s

■ Sandy Black □ Sandy White

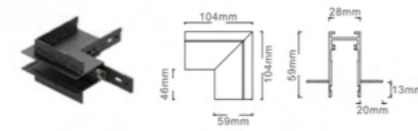


Dot12-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90 > 80	< 3	3000K 2700K 4000K	20° 34° 48°	1020Lm

■ Sandy Black □ Sandy White




LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	5542	Φ0.36
2	1386	Φ0.72
3	615	Φ1.08
4	346	Φ1.44
5	221	Φ1.80



h(m)	E(lx)	Φ(m)
1	3794	Φ0.36
2	948	Φ0.72
3	421	Φ1.08
4	237	Φ1.44
5	151	Φ1.80



h(m)	E(lx)	Φ(m)
1	2258	Φ0.65
2	564	Φ1.31
3	250	Φ1.97
4	141	Φ2.63
5	90	Φ3.29



Dot24-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
24W	> 90	< 3	3000K	20°	1875Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra





h(m)	E(lx)	Φ(m)
1	101121	Φ0.36
2	2528	Φ0.73
3	1124	Φ1.10
4	632	Φ1.47
5	404	Φ1.84



h(m)	E(lx)	Φ(m)
1	7111	Φ0.42
2	1778	Φ0.85
3	790	Φ1.28
4	444	Φ1.71
5	284	Φ2.14



h(m)	E(lx)	Φ(m)
1	4057	Φ0.65
2	1014	Φ1.30
3	450	Φ1.96
4	253	Φ2.61
5	162	Φ3.27



Linear10-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90	< 3	3000K	Diffuse	230Lm
	> 80		2700K		
			4000K		



■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	88	Φ2.37
2	22	Φ4.74
3	9	Φ7.12
4	5	Φ9.49
5	3	Φ11.86



Linear20-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	Diffuse	605Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	239	Φ2.35
2	59	Φ4.70
3	26	Φ7.05
4	14	Φ9.40
5	9	Φ11.75





Linear40-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	1015Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	388	Φ2.47
2	97	Φ4.95
3	43	Φ7.43
4	24	Φ9.91
5	15	Φ12.38



Linear80-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
30W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	1970Lm

■ Sandy Black □ Sandy White


LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	773	Φ2.42
2	193	Φ4.85
3	85	Φ7.27
4	48	Φ9.70
5	30	Φ12.12

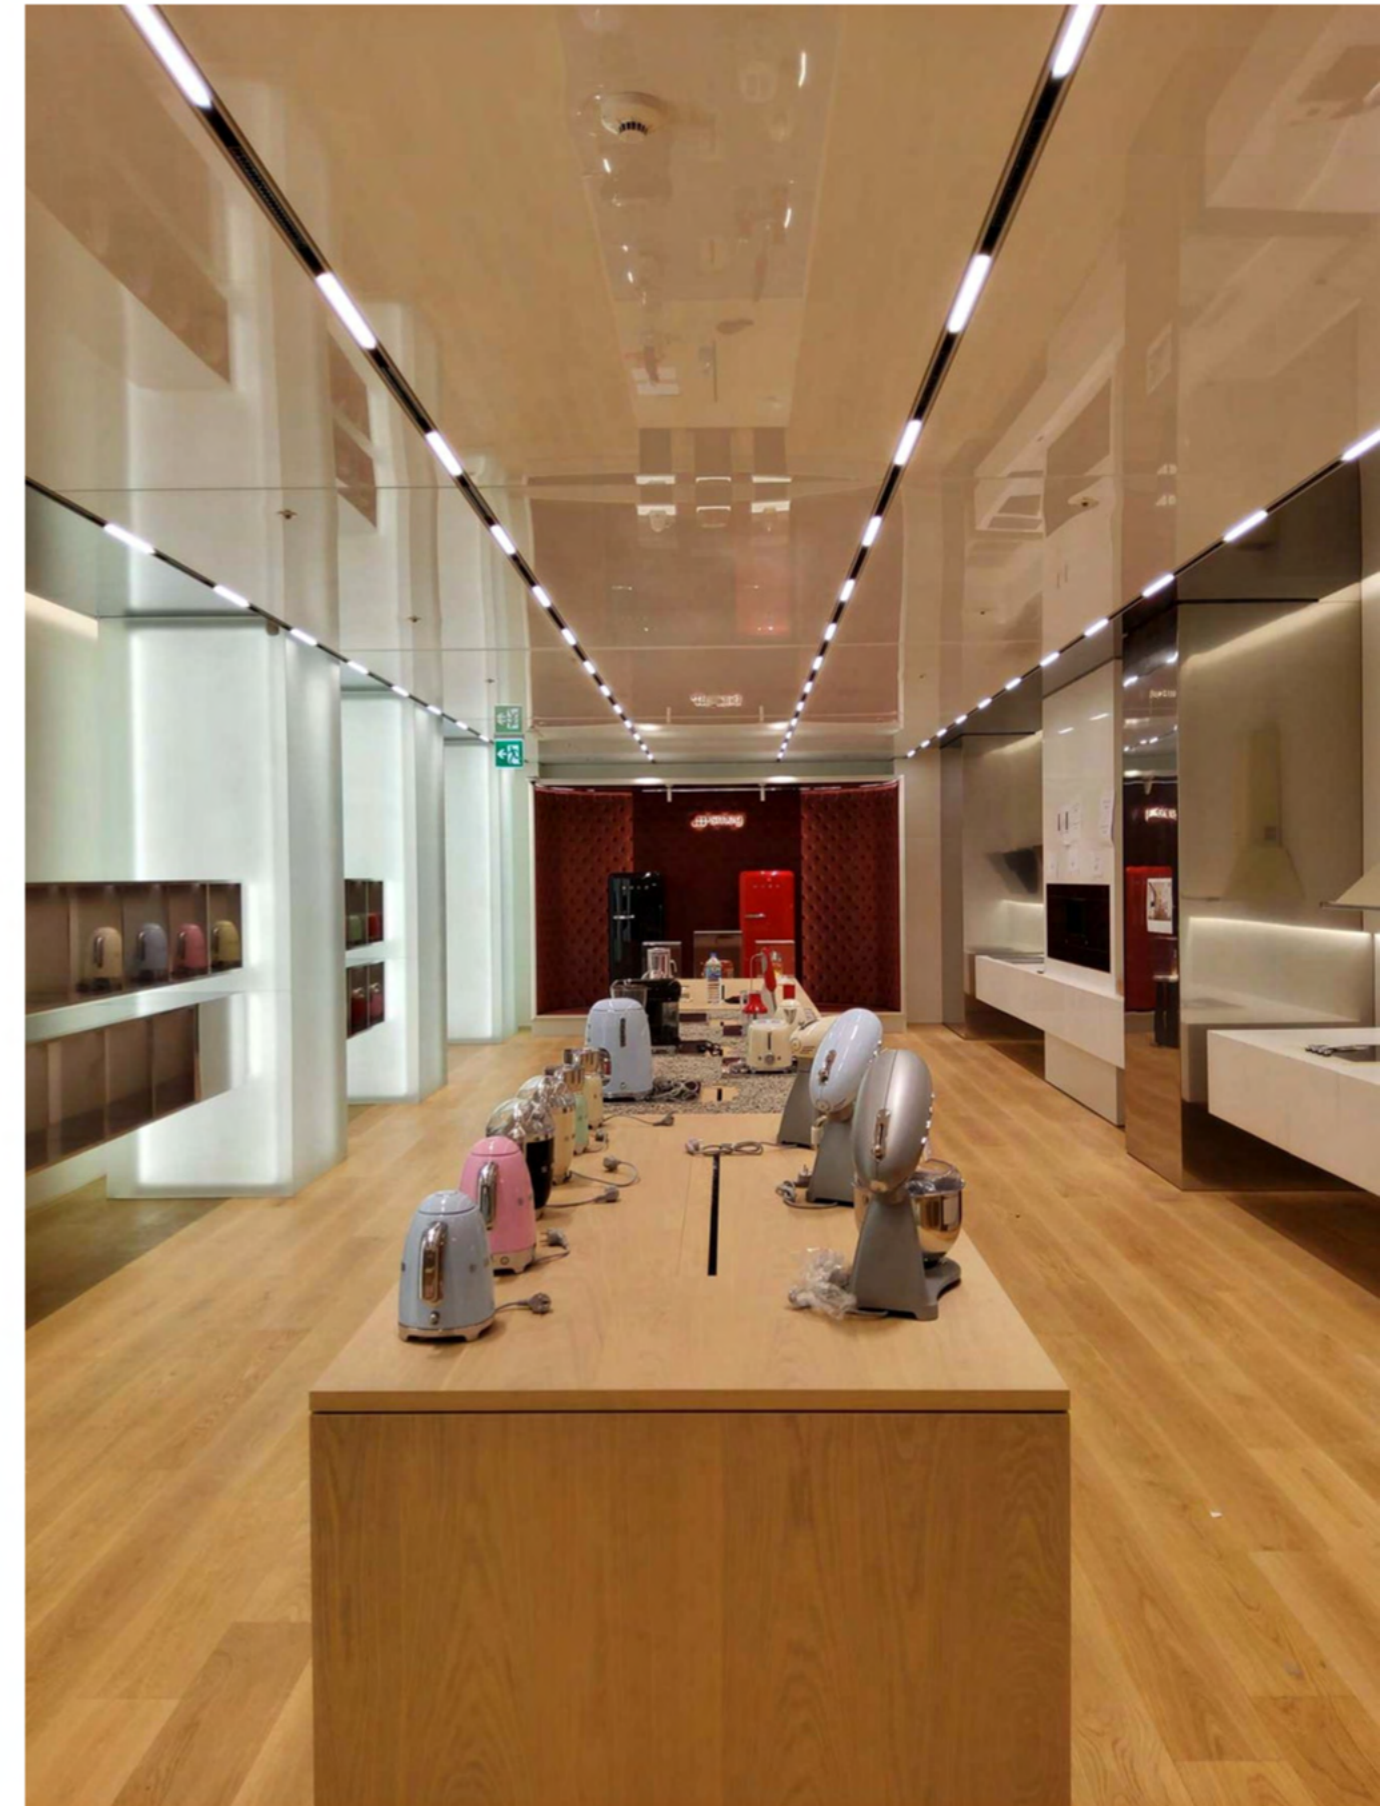



Fold06-s






POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	20°	685Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

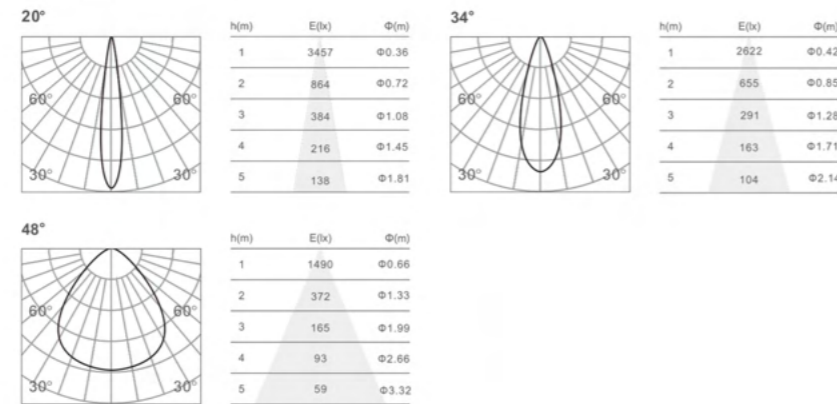

Fold10-s





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	Diffuse	625Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

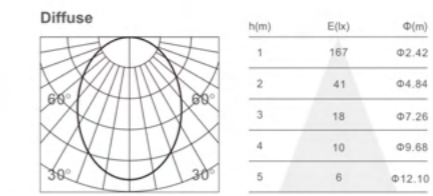

Fold12-s





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	20°	1150Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

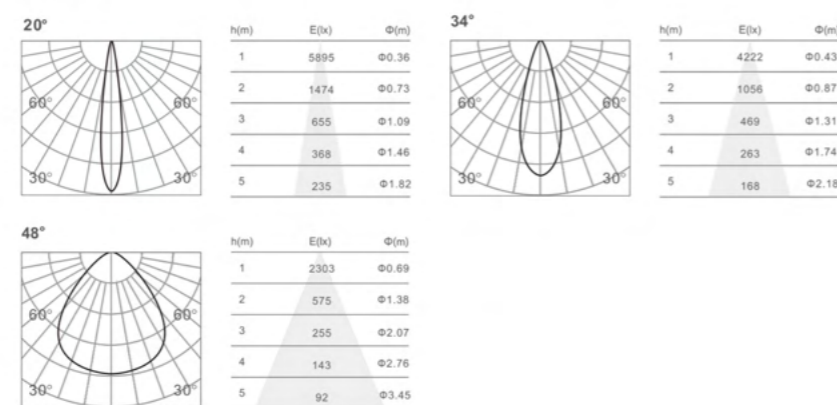

Fold20-s





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	Diffuse	990Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

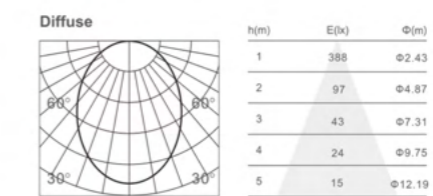



Out12-s





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90	< 3	3000K	Diffuse	1040Lm
	> 80		2700K		
			4000K		


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra




h(m)	E(lx)	Φ(m)
1	5542	Φ0.36
2	1386	Φ0.72
3	615	Φ1.08
4	346	Φ1.44
5	221	Φ1.80



h(m)	E(lx)	Φ(m)
1	3794	Φ0.43
2	948	Φ0.87
3	421	Φ1.31
4	237	Φ1.75
5	151	Φ2.18

48°



h(m)	E(lx)	Φ(m)
1	2258	Φ0.65
2	564	Φ1.31
3	250	Φ1.97
4	141	Φ2.63
5	90	Φ3.29

Out40-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 90	< 3	3000K	Diffuse	1015Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



h(m)	E(lx)	Φ(m)
1	388	Φ2.47
2	97	Φ4.95
3	43	Φ7.43
4	24	Φ9.91
5	15	Φ12.38



Wallsher20-s





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90	< 3	3000K	Diffuse	750Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

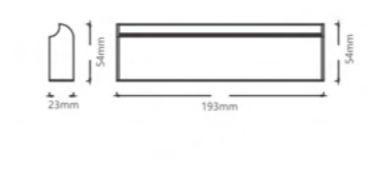

h(m)	E(lx)	Φ(m)
1	403	Φ0.82
2	101	Φ1.64
3	44	Φ2.46
4	25	Φ3.28
5	16	Φ4.10

Wallsher30-s





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 90	< 3	3000K	Diffuse	1140Lm
	> 80		2700K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

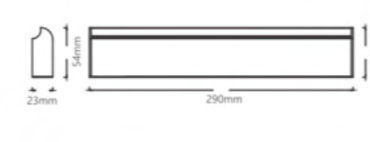

h(m)	E(lx)	Φ(m)
1	595	Φ0.85
2	149	Φ1.70
3	66	Φ2.56
4	37	Φ3.41
5	23	Φ4.27



Pendant



Surface



Recessed

CURVY MAGNETIC SYSTEM

With the brand new track addition
The curvy system bring you more inspiration

