

PROJECT NAME:	TYPE:
---------------	-------




1" Adjustable




1" Adjustable	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
N45	R	01	QS Microflange QT Trimless Drywall	B Black W White	B Black W White G Golden B Black Mirror	B Bridgelux	90 90+ CRI 10 Watts Lumens Divd.-990	27 2700K 30 3000K 35 3500K 40 4000K	50 50° 35 35°	CMEM55 On/Off; Triac PhaseDim; 120VAC KIG On/Off; Triac Phase Dim; 120/277VAC <i>*Remote Placed</i>	NCP-SR3-R21 Non-IC Bracket NCBX-SR3-R21 IC Box BRKT-2R50A Non-IC Bracket for Dual Lights <i>*For more details, pls refer to page 3</i>
							97 97+ CRI 10 Watts Lumens Divd.-700		50 50° 35 35° 25 25°		
							Dim To Warm 90 90+ CRI 10 Watts Lumens Divd.-650	1830 1800-3000K	50 50° 35 35°		
							90 90+ CRI 10 Watts Lumens Divd.-760 <i>*External 5CCT Selector</i>	2765A 2700K 3000K 4000K 5000K 6500K	50 50° 35 35°		
						TUNABLE WHITE 90 90+ CRI 10 Watts Lumens Divd.-760	2765 2700-6500K	25 25°	<i>*Dali 2ch Driver Remote Placed</i>		
N45-R01											

Photometry


Beam angle: 50°
Delivered Lumens: 990 lumens
CCT: 4000K
CRI: 90
Power: 10W
Efficacy: 99lm/W

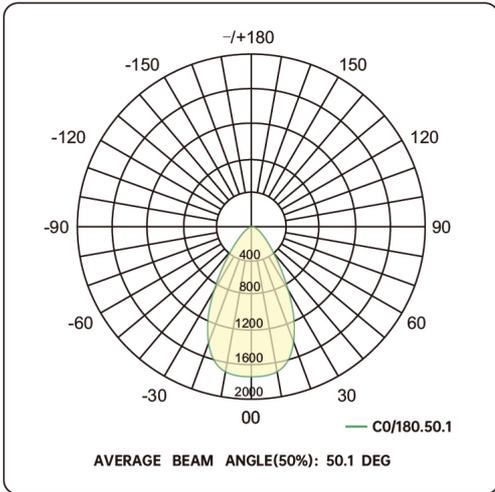

Beam angle: 35°
Delivered Lumens: 920 lumens
CCT: 4000K
CRI: 90
Power: 10W
Efficacy: 92lm/W

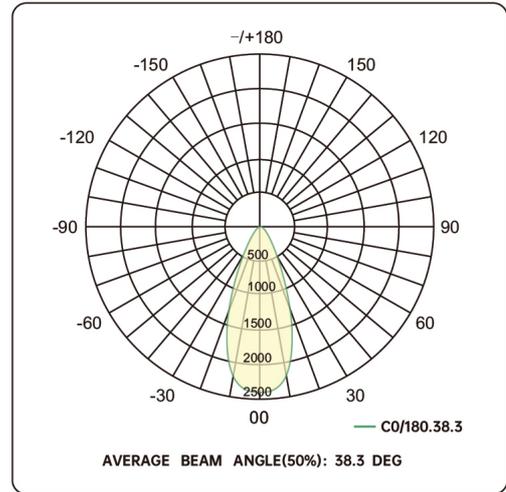

Beam angle: 25°
Delivered Lumens: 630 lumens
CCT: 4000K
CRI: 97
Power: 10W
Efficacy: 63lm/W

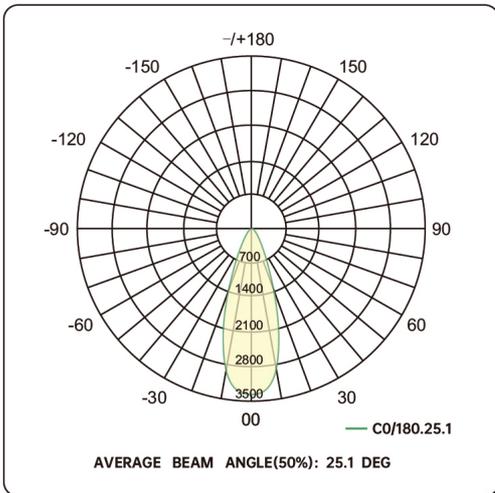

ACCESSORIES

Brackets for New-Construction (4-legs)




NCP-SR3-R21

Cutout:

- Round: Ø 3" (Ø 77mm)
- Ø 2" (Ø 62mm)
- Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

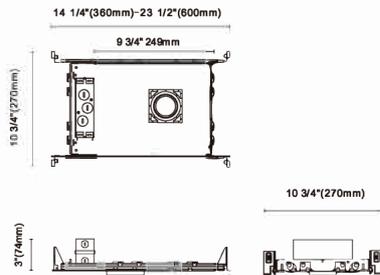

IC-BOX for New-Construction (4-legs)




NCBX-SR3-R21

Cutout:

- Round: Ø 3" (Ø 77mm)
- Ø 2" (Ø 62mm)
- Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

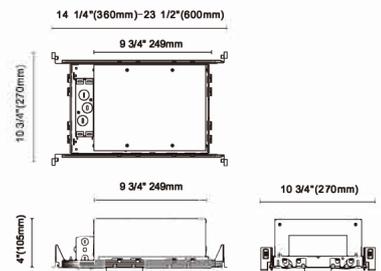

Cut out



Brackets for New-Construction




BRKT-2R50A

trim & trimless

Cut out:

- Round: Ø 1" 2 (Ø 50mm*2)

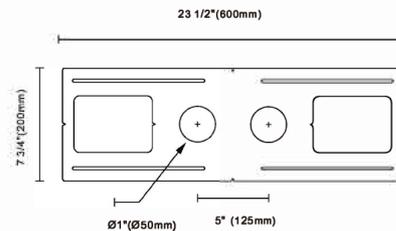

Remark

Tailored brackets are available with a reasonable surcharge, details as below




- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

For more information, please get in touch with sales.



1" Adjustable

N45-R01




N45-R01

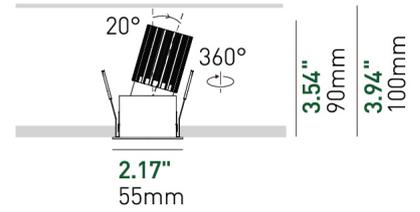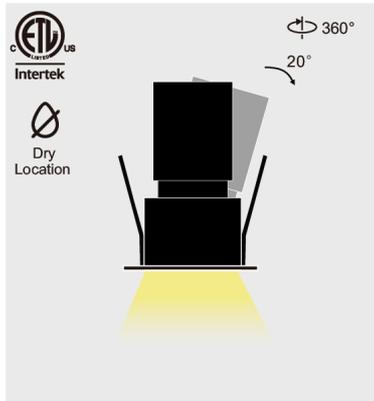

N45-R01

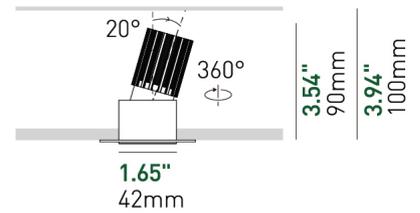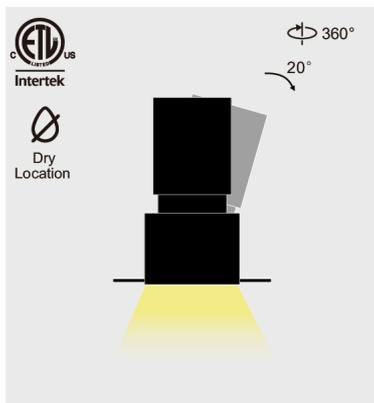

Microflange

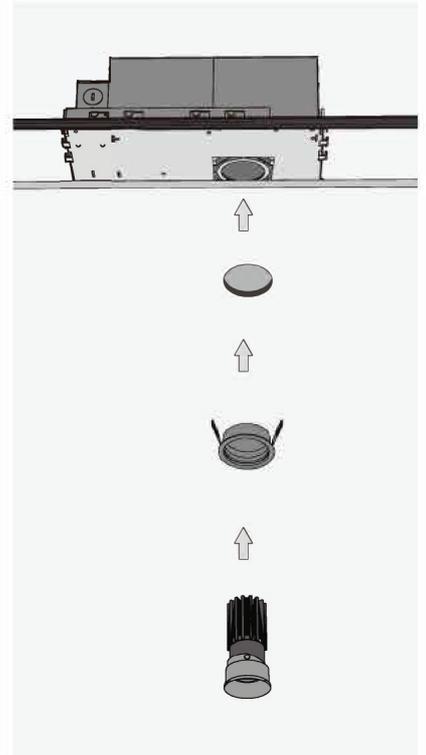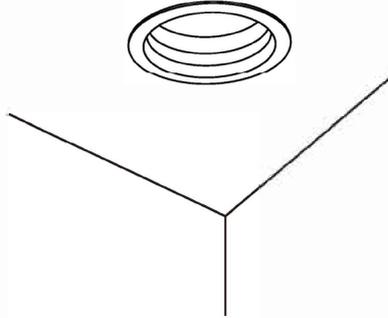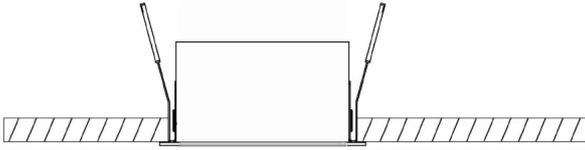

Trimless Drywall

