



Photometry


Beam angle: 50°
Delivered Lumens: 990 lumens
CCT: 4000K
CRI: 90
Power: 10W
Efficacy: 99lm/W

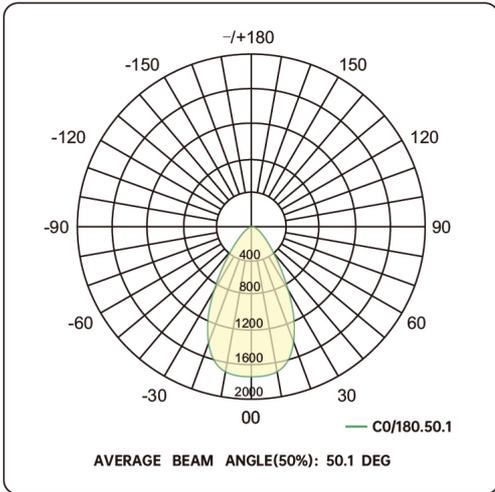

Beam angle: 35°
Delivered Lumens: 920 lumens
CCT: 4000K
CRI: 90
Power: 10W
Efficacy: 92lm/W

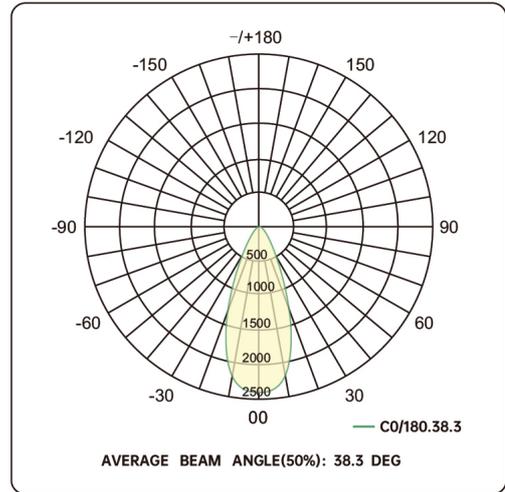

Beam angle: 25°
Delivered Lumens: 630 lumens
CCT: 4000K
CRI: 97
Power: 10W
Efficacy: 63lm/W

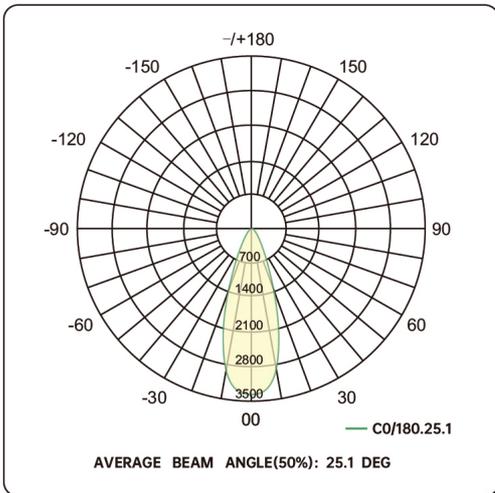

ACCESSORIES

Brackets for New-Construction (4-legs)




NCP-SR3-R21

Cutout:

- Round: Ø 3" (Ø 77mm)
- Ø 2" (Ø 62mm)
- Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

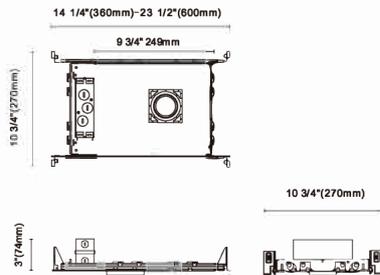

IC-BOX for New-Construction (4-legs)




NCBX-SR3-R21

Cutout:

- Round: Ø 3" (Ø 77mm)
- Ø 2" (Ø 62mm)
- Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

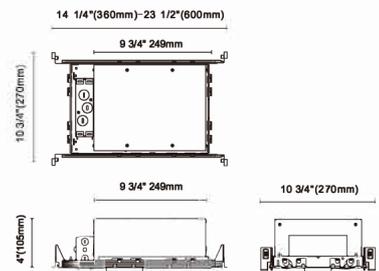

Cut out



Brackets for New-Construction




BRKT-2R50A

trim & trimless

Cut out:

Round: Ø 1" x 2 (Ø 50mm x 2)

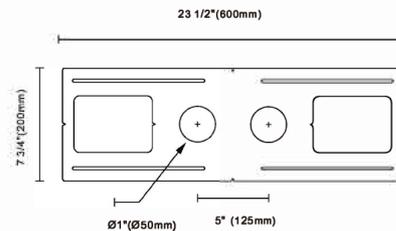

Remark

Tailored brackets are available with a reasonable surcharge, details as below




- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7 pcs
- Holes' positions on the bracket can be done as requests

For more information, please get in touch with sales.



1" Spotlight

N45-R26




N45-R01

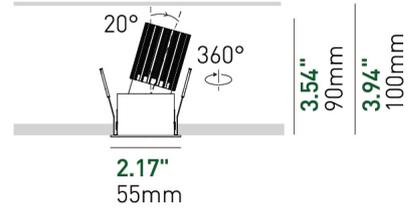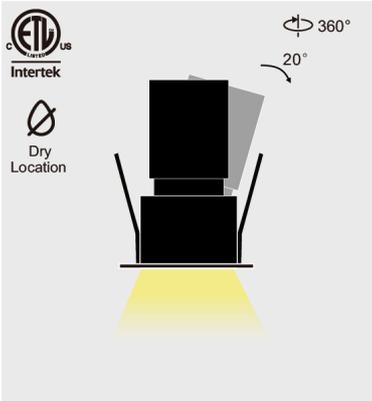

N45-R01

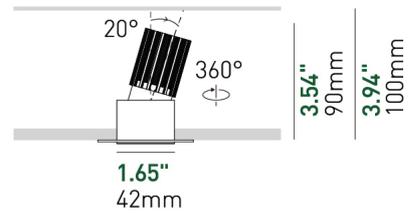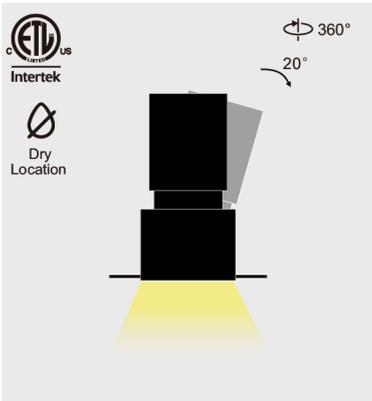

Microflange

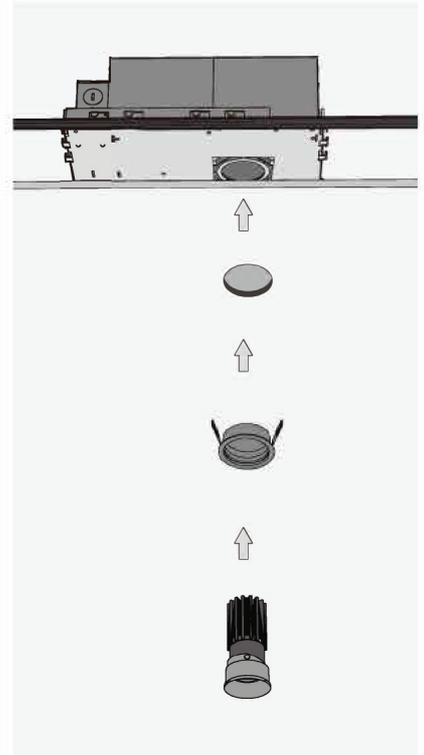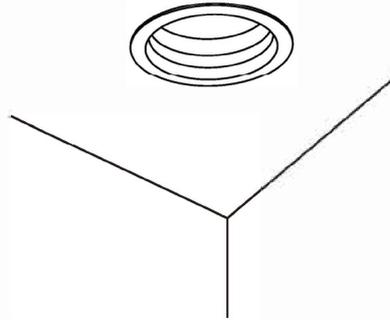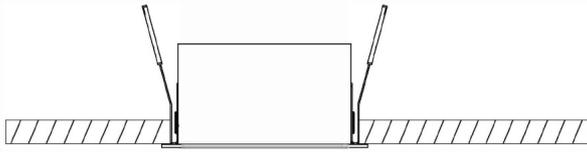

Trimless Drywall

