





## Photometry


**Beam angle:** 50°  
**Delivered Lumens:** 800 lumens  
**CCT:** 2700K to 6500K  
**CRI:** 90+  
**Power:** 10W  
**Efficacy:** 165lm/W

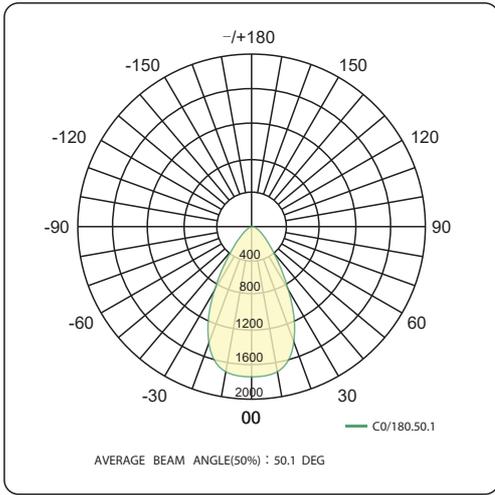

**Beam angle:** 35°  
**Delivered Lumens:** 730 lumens  
**CCT:** 2700K to 6500K  
**CRI:** 90+  
**Power:** 10W  
**Efficacy:** 165lm/W

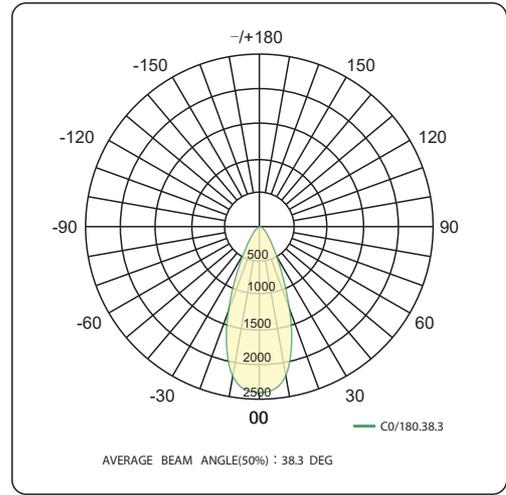

**Beam angle:** 25°  
**Delivered Lumens:** 600 lumens  
**CCT:** 2700K to 6500K  
**CRI:** 90+  
**Power:** 10W  
**Efficacy:** 165lm/W

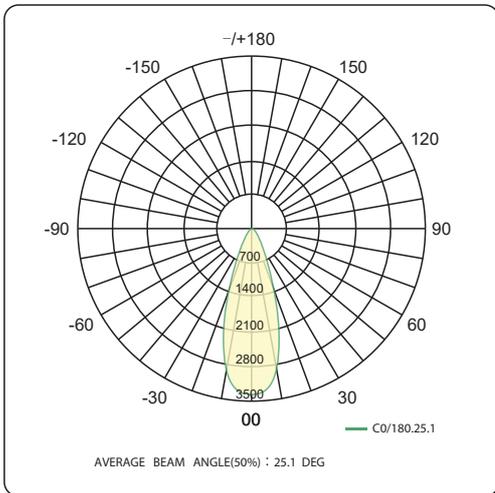

## ACCESSORIES

### Brackets for New-Construction (4-legs)




#### NCP-SR3-R21

For 1" Round Pinhole trim&trimless

Cut out:

- Round: Ø 3" (Ø 77mm)
- Ø 2" (Ø 62mm)
- Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

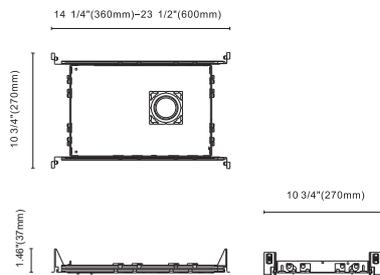

### IC-BOX for New-Construction (4-legs)




#### NCBX-SR3-R21

For 1" Round Pinhole trim&trimless


Cut out:

- Round: Ø 3" (Ø 77mm)
- Ø 2" (Ø 62mm)
- Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

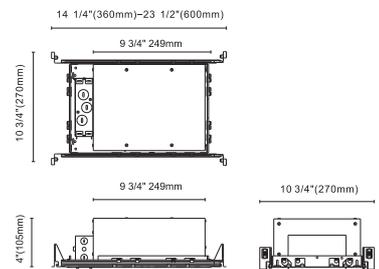

### Cut out

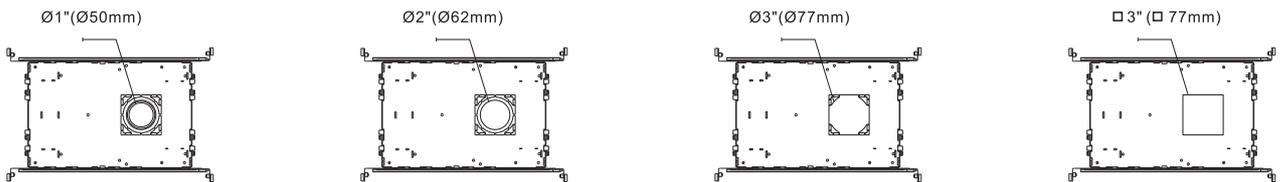

### Brackets for New-Construction




#### BRKT-2R50A

For 1" Round Pinhole trim&trimless

Cut out:

Round: Ø 1" \* 2 (Ø 50mm \* 2)

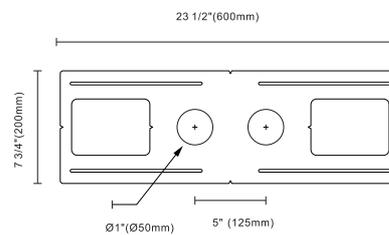

### Remark

Tailored brackets are available with a reasonable surcharge, details as below




- The customized bracket's dimensions are still the same as the existing ones, 600\*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

For more information, please get in touch with nuordic sales.



# 1" Round Pinhole

N45-R06

N45-R06

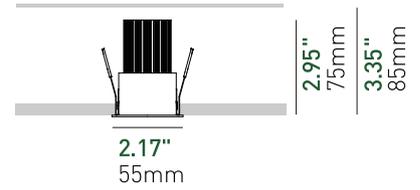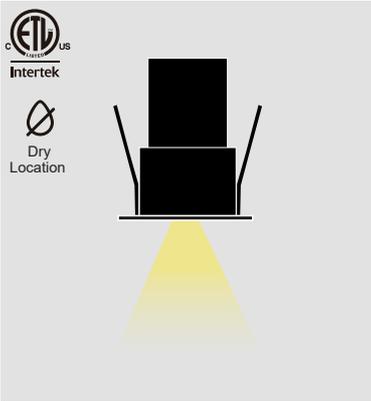




N45-R06

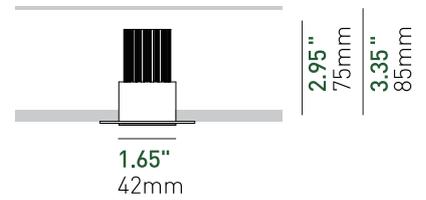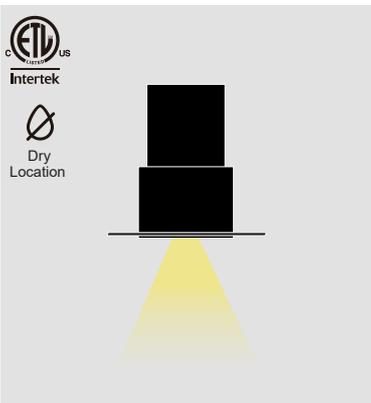

# 1" Round Pinhole

N45-R06

## Microflange

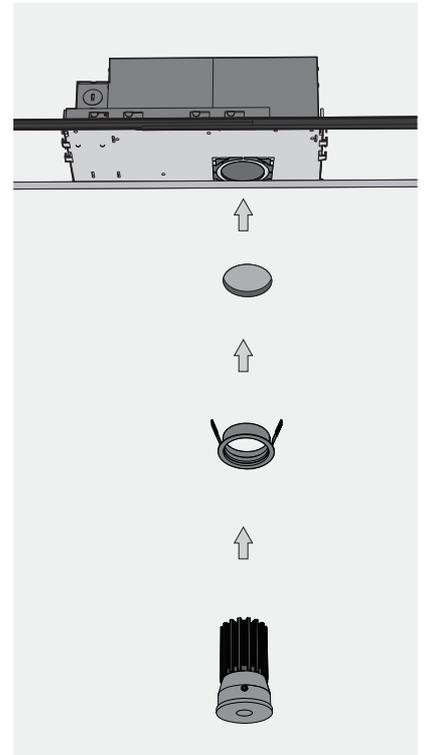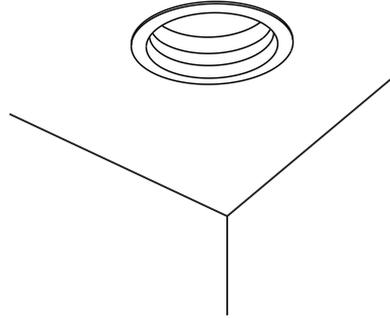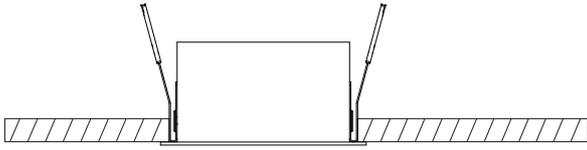

## Trimless Drywall

