


N55-R23



P.system	I (led)	Beam Angle	CCT	Lumens
10W	250mA	15°	2700K	490.5 lm
			3000K	543.0 lm
			4000K	653.5 lm
10W	250mA	25°	2700K	746.0 lm
			3000K	798.5 lm
			4000K	909.0 lm
10W	250mA	35°	2700K	808.7 lm
			3000K	861.2 lm
			4000K	971.7 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	<13	50°

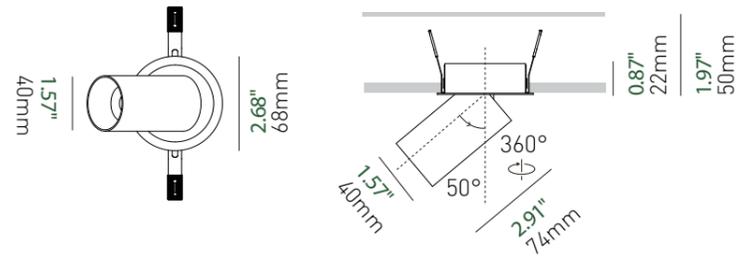

With Trim

W+W+W B+W+B B+B+B W+W+B

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


N55-R23



P.system	I (led)	Beam Angle	CCT	Lumens
10W	250mA	15°	2700K	490.5 lm
			3000K	543.0 lm
			4000K	653.5 lm
10W	250mA	25°	2700K	746.0 lm
			3000K	798.5 lm
			4000K	909.0 lm
10W	250mA	35°	2700K	808.7 lm
			3000K	861.2 lm
			4000K	971.7 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	<13	50°

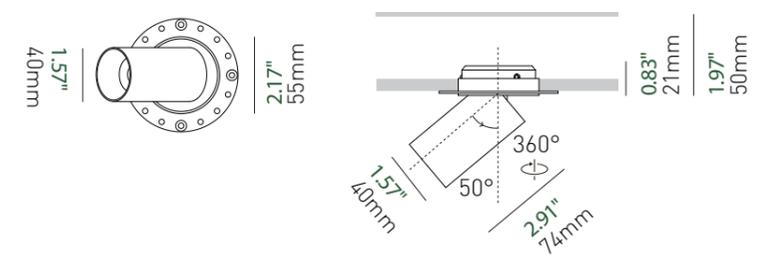

Trimless

W+W+W B+W+B B+B+B W+W+B

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI