

PROJECT NAME:

TYPE:




2" - - - - -


MODEL	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
2 INCH	S	44	QS Microflange	B Black	B Black	B Bridgelux	90 90+ CRI 15 Watts Lumens Divd.-1485	27  2700K 30  3000K 35  3500K 40  4000K	50 50° 35 35°	CMEM55 On/Off; Triac PhaseDim; 120VAC KIG On/Off; Triac Phase Dim; 120/277VAC *Remote Placed	NCP-SR3-R21 Non-IC Bracket NCBX-SR3-R21 IC Box BRKT-2SR75A Non-IC Bracket for Dual Lights *For more details,pls refer to page 3
			QT Trimless Drywall	W White	W White		97 97+ CRI 15 Watts Lumens Divd.-1050		50 50° 35 35° 25 25°		
							Dim To Warm 90 90+ CRI 15 Watts Lumens Divd.-973	1830  1800-3000K	50 50° 35 35°		
							90 90+ CRI 15 Watts Lumens Divd.-1150 *External 5CCT Selector	2765A  2700K  3000K  4000K  5000K  6500K	50 50° 35 35°		
							TUNABLE WHITE				
							90 90+ CRI 15 Watts Lumens Divd.-1150	2765  2700-6500K	25 25°	*Dali 2ch Driver Remote Placed	
2 Inch Recessed Round Fixed Downlight											

Photometry


Beam angle: 50°
Delivered Lumens: 1485 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 99lm/W

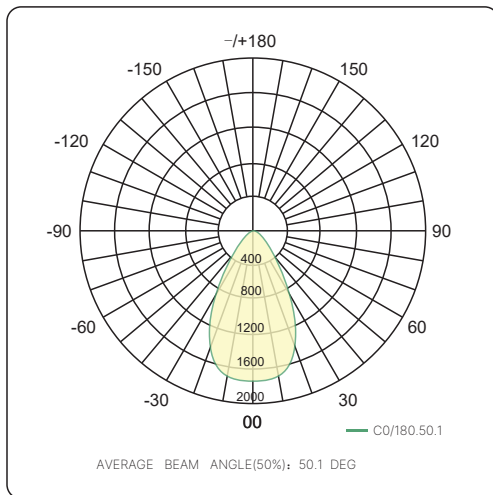

Beam angle: 35°
Delivered Lumens: 1380 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 92lm/W

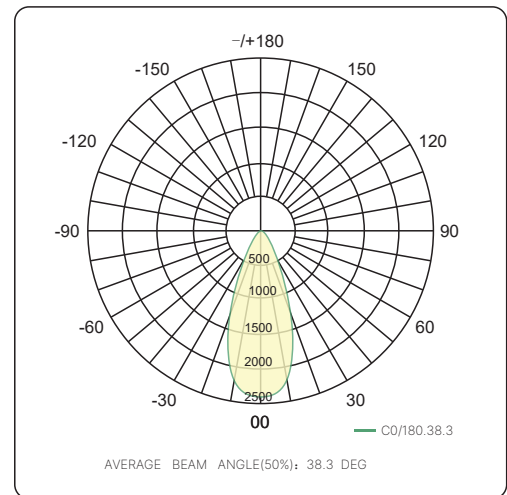


Beam angle: 25°
Delivered Lumens: 945 lumens
CCT: 4000K
CRI: 97
Power: 15W
Efficacy: 63lm/W

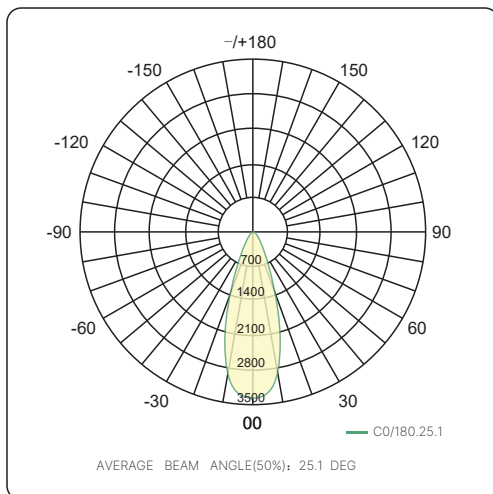

ACCESSORIES


Brackets for New-Construction (4-legs)

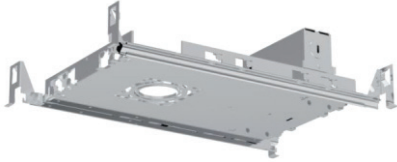


Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

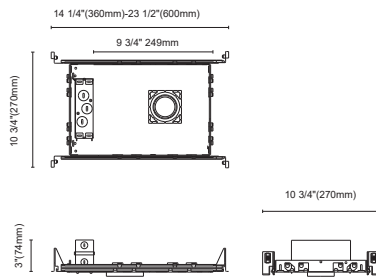


IC-BOX for New-Construction (4-legs)

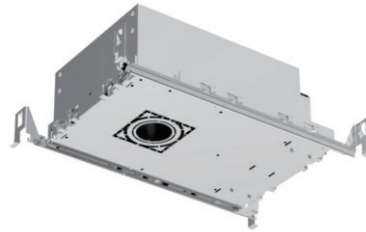





Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

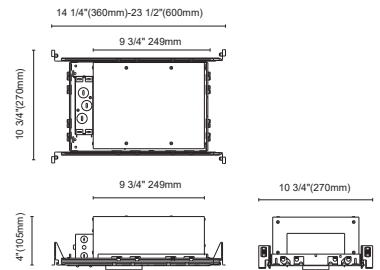

Cut out




Brackets for New-Construction



Cut out:

Round: Ø 2" x 2" (Ø 62mm x 2)

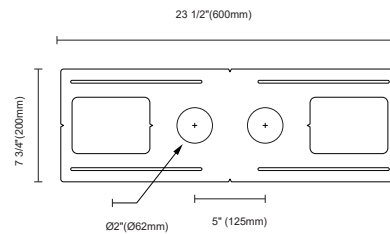

Remark







Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests



NOURDIC LIGHTING COMPANY

Locations: USA: 485 Glenbrook Dr, Lake Worth, FL 33462
Canada: 480 Warren Rd, King City ON L7B 1C4

E: info@nourdic.com
T: +1-561-695-4107

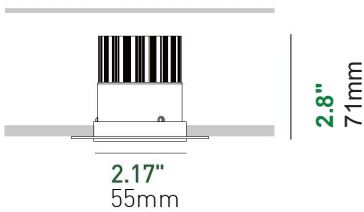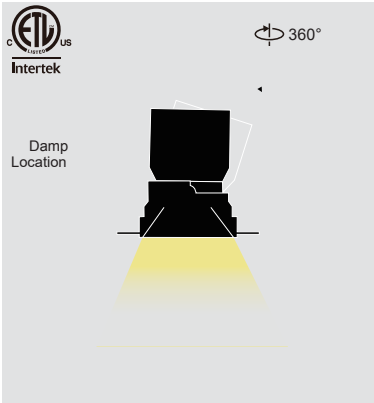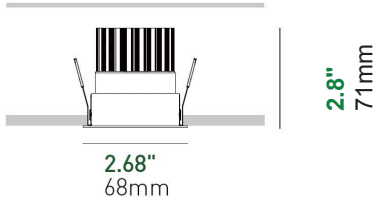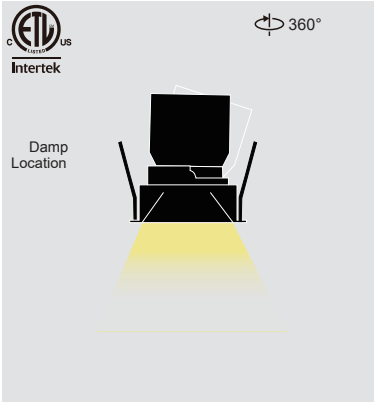

Microflange

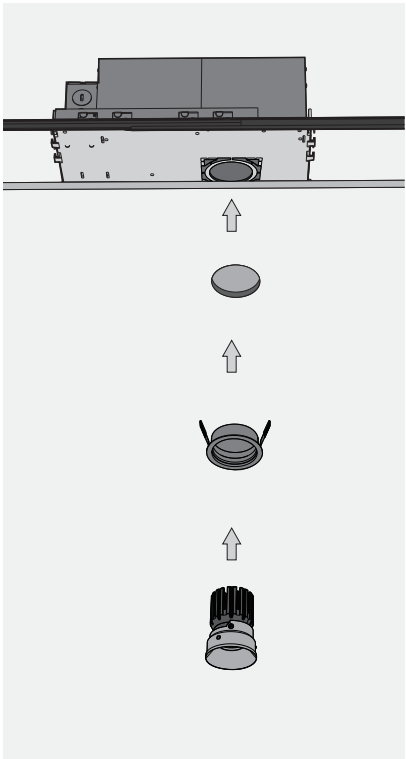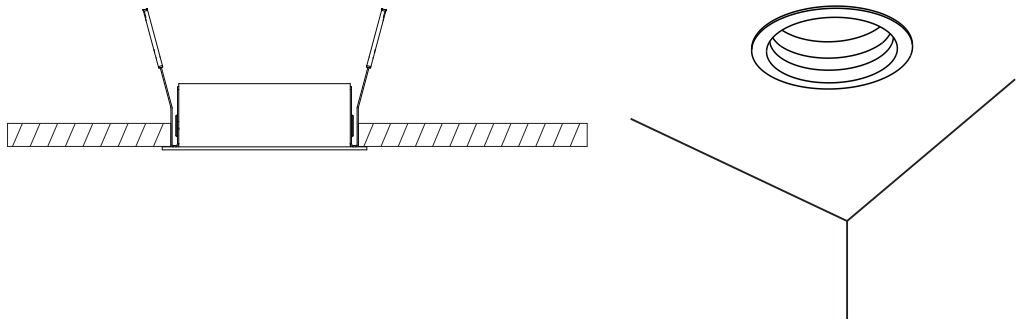

Trimless Drywall

