


PROJECT NAME:	TYPE:

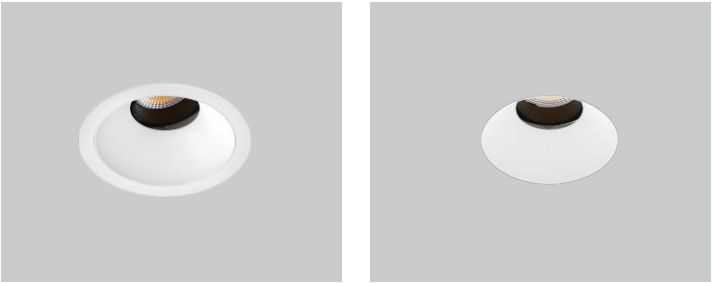


2" - - - - -


	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES				
2 INCH	S	21	QS Microflange	B Black	B Black	B Bridgelux	90 90+ CRI 15 Watts Lumens Divd.-1485	27 2700K 30 3000K 35 3500K 40 4000K	50 50° 35 35°	CMEM55 On/Off; Triac PhaseDim; 120VAC KIG On/Off; Triac Phase Dim; 120/277VAC *Remote Placed	NCP-SR3-R21 Non-IC Bracket NCBX-SR3-R21 IC Box BRKT-2SR75A Non-IC Bracket for Dual Lights *For more details,pls refer to page 3				
			QT Trimless Drywall	W White	W White		97 97+ CRI 15 Watts Lumens Divd.-1050		50 50° 35 35° 25 25°						
							Dim To Warm		50 50° 35 35°						
							90 90+ CRI 15 Watts Lumens Divd.-973	1830 1800-3000K							
							90 90+ CRI 15 Watts Lumens Divd.-1150 *External 5CCT Selector	2765A 2700K 3000K 4000K 5000K 6500K	50 50° 35 35°						
			TUNABLE WHITE									50 50° 35 35°			
							90 90+ CRI 15 Watts Lumens Divd.-1150	2765 2700-6500K	25 25°			*Dali 2ch Driver Remote Placed			
2 Inch Recessed Wall Washer															

Photometry


Beam angle: 50°
Delivered Lumens: 1485 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 99lm/W

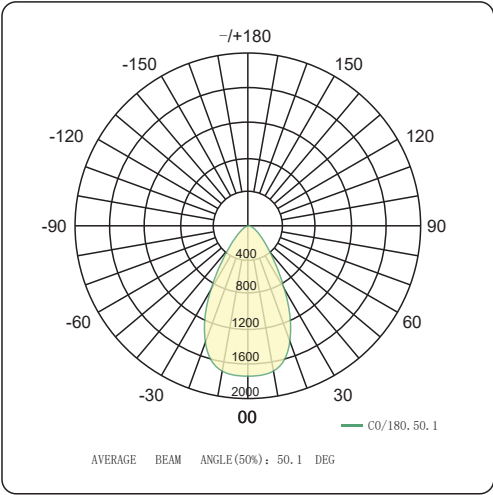

Beam angle: 35°
Delivered Lumens: 1380 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 92lm/W

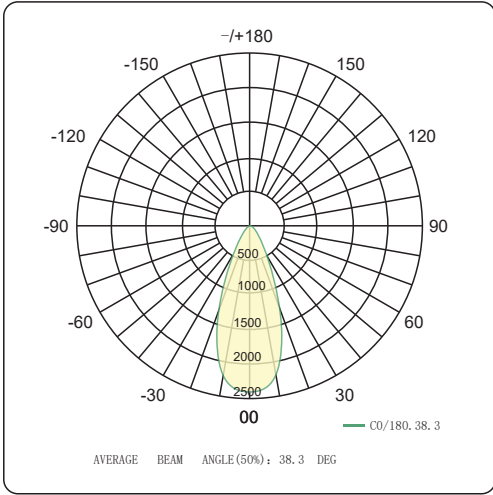


Beam angle: 25°
Delivered Lumens: 945 lumens
CCT: 4000K
CRI: 97
Power: 15W
Efficacy: 63lm/W

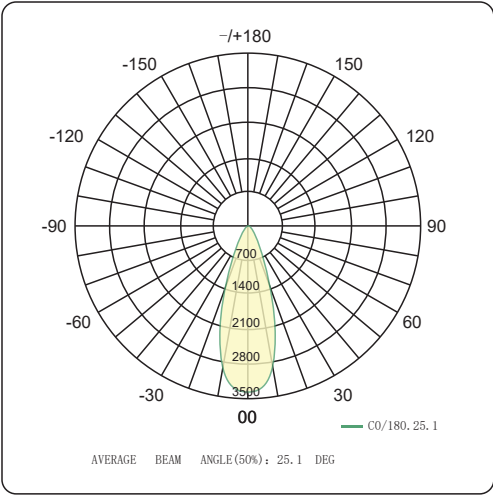

ACCESSORIES

Brackets for New-Construction (4-legs)

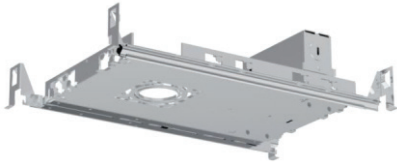


NCP-SR3-R21


Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

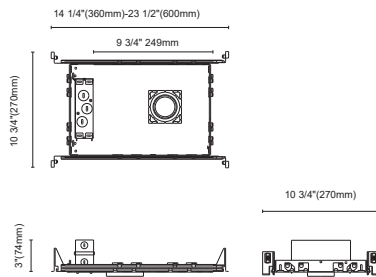

IC-BOX for New-Construction (4-legs)

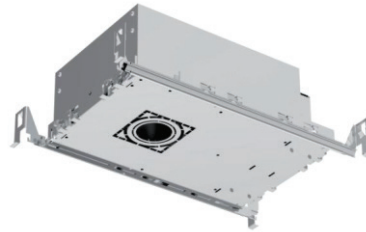


NCBX-SR3-R21





Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

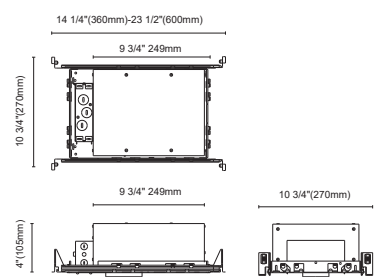

Cut out




Brackets for New-Construction



BRKT-2R60A

Cut out:







Round: Ø 2" x 2 (Ø 62mm x 2)

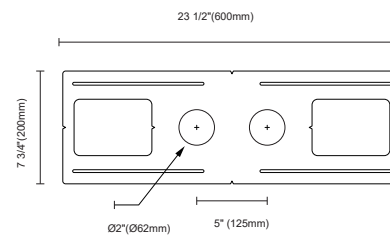




Remark

Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

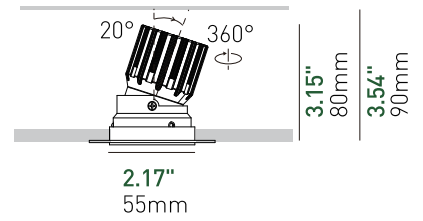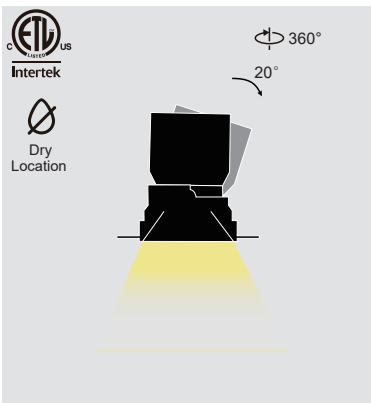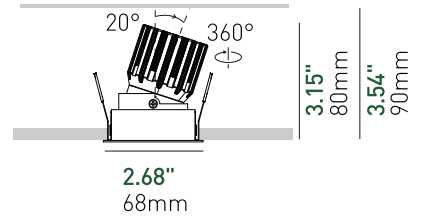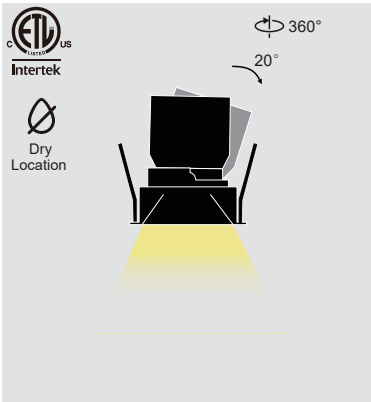

Microflange

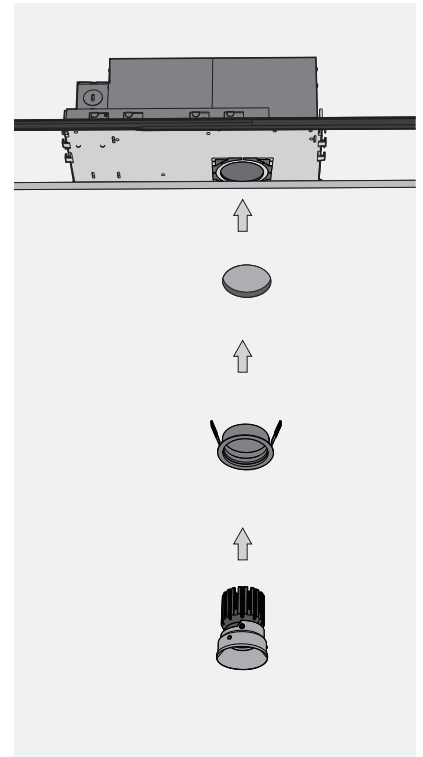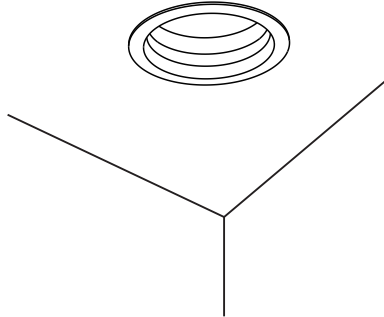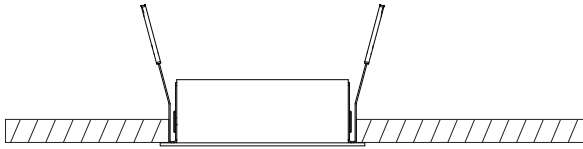

Trimless Drywall

