

PROJECT NAME:	TYPE:
---------------	-------



# 3" Gypsum




MODEL	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
N75	S	10	QT Trimless Drywall	W White	B Black  W White	B Bridgelux	<b>90</b> 90+ CRI 15 Watts Lumens Divd.-1485	<b>27</b>  2700K <b>30</b>  3000K <b>35</b>  3500K <b>40</b>  4000K	<b>50</b> 50° <b>35</b> 35°	<b>CMEM55</b> On/Off; Triac PhaseDim; 0-10V Dim 120VAC  <b>KIG</b> On/Off; Triac Phase Dim; 0-10V Dim 120/277VAC <i>*Remote Placed</i>	<b>NCP-S100</b> Non-IC Bracket  <b>NCBX-S100</b> IC Box  <b>BRKT-S100</b> Non-IC Bracket for Dual Lights  <i>*For more details,pls refer to page 3</i>
							<b>97</b> 97+ CRI 15 Watts Lumens Divd.-1050	<b>1830</b>  1800-3000K	<b>50</b> 50° <b>35</b> 35°		
							<b>Dim To Warm</b>  <b>90</b> 90+ CRI 15 Watts Lumens Divd.-973				
							<b>90</b> 90+ CRI 15 Watts Lumens Divd.-1150  <i>*External 5CCT Selector</i>	<b>2765A</b>  2700K  3000K  4000K  5000K  6500K	<b>50</b> 50° <b>35</b> 35°		
							<b>TUNABLE WHITE</b>  <b>90</b> 90+ CRI 15 Watts Lumens Divd.-1150	<b>2765</b>  2700-6500K	<b>25</b> 25°		


N75-S10

## Photometry


**Beam angle:** 50°  
**Delivered Lumens:** 1485 lumens  
**CCT:** 4000K  
**CRI:** 90  
**Power:** 15W  
**Efficacy:** 99lm/W

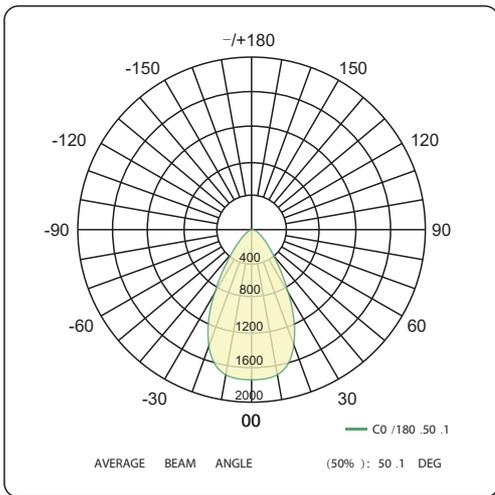

**Beam angle:** 35°  
**Delivered Lumens:** 1380 lumens  
**CCT:** 4000K  
**CRI:** 90  
**Power:** 15W  
**Efficacy:** 92lm/W

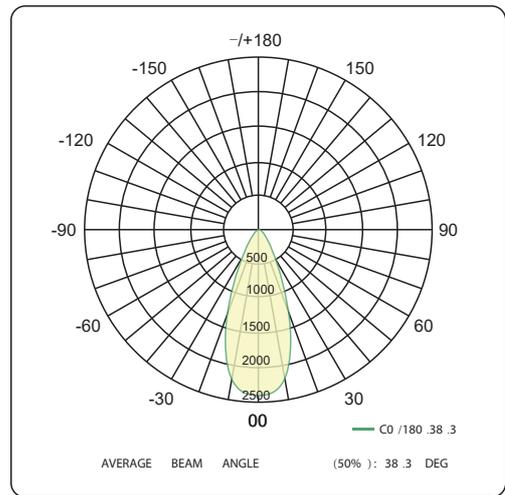

**Beam angle:** 25°  
**Delivered Lumens:** 945 lumens  
**CCT:** 4000K  
**CRI:** 97  
**Power:** 15W  
**Efficacy:** 63lm/W

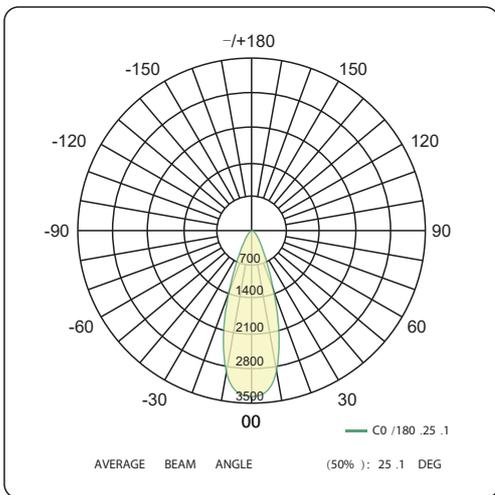

## ACCESSORIES


### Brackets for New-Construction (4-legs)




#### NCP-S100

Cut out:

Square: □ 4.02"×4.02" ( □ 102\*102mm)

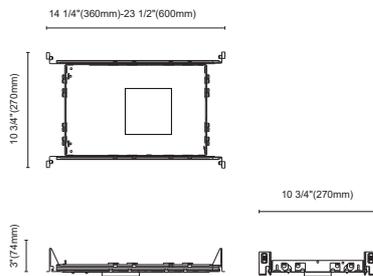


### IC-BOX for New-Construction (4-legs)

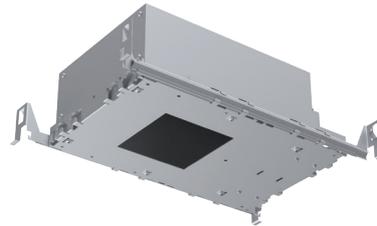

#### NCBX-S100


Cut out:

Square: □ 4.02"×4.02" ( □ 102\*102mm)

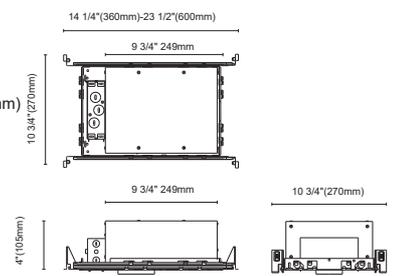

#### Cut out

□ 4.02"×4.02" ( □ 102\*102mm)




### Rough-in Plate for New-Construction



#### BRKT-S100

Cut out:

Square: □ 4.02"×4.02" ( □ 102\*102mm)

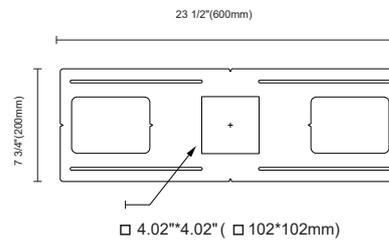

### Remark

Tailored brackets are available with a reasonable surcharge, details as below



- The customized bracket's dimensions are still the same as the existing ones, 600\*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

For more information, please get in touch with sales.

# 3" Gypsum

N75-S10

N75-S10

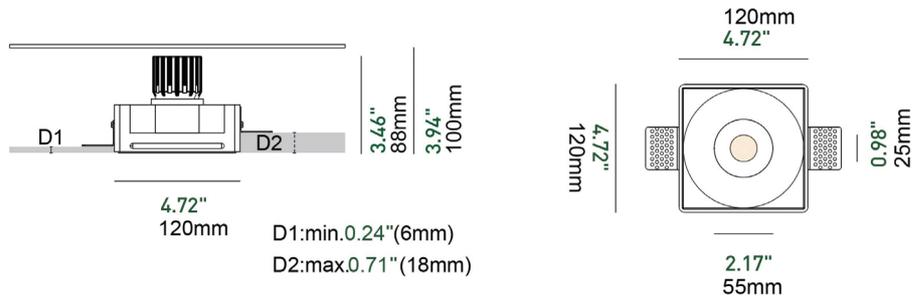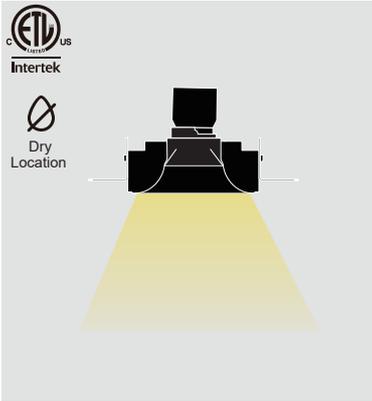

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	< 15	39°

P.system	I(led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K	762.0 lm
				3000K	814.5 lm
				4000K	925.0 lm
15W	350mA	60°	90Ra	2700K	1331.7 lm
				3000K	1384.2 lm
				4000K	1494.7 lm

## Trimless Drywall

