

PROJECT NAME:

TYPE:




3"


	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES		
3 INCH	R Round	01	QS Microflange	B Black	B Black	B Bridgelux	90 90+ CRI 15 Watts Lumens Divd.-1485	27  2700K	50 50°	CMEM55 On/Off; Triac PhaseDim; 120VAC	NCP-SR3-R21 Non-IC Bracket		
	S Square		QT Trimless Drywall	W White	W White		97 97+ CRI 15 Watts Lumens Divd.-1080	30  3000K	35 50°			KIG On/Off; Triac Phase Dim; 120/277VAC	NCBX-SR3-R21 IC Box
					G Gold			35  3500K	35 35°				
							Dim To Warm	40  4000K	25 25°				
							90 90+ CRI 15 Watts Lumens Divd.-973	1830  1800-3000K	50 50°				
							90 90+ CRI 15 Watts Lumens Divd.-1150	2765A  2700K-6500K	35 35°				
				TUNABLE WHITE	90 90+ CRI 15 Watts Lumens Divd.-1150	2765  2700-6500K	25 25°	*Dali 2ch Driver Remote Placed	*For more details,pls refer to page 3				
3 INCH RECESSED ROUND ADJUSTABLE DOWNLIGHT													

Photometry


Beam angle: 50°
Delivered Lumens: 1485 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 99lm/W

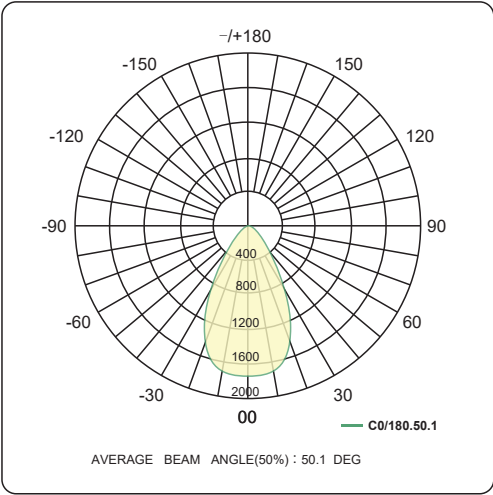

Beam angle: 35°
Delivered Lumens: 1380 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 92lm/W

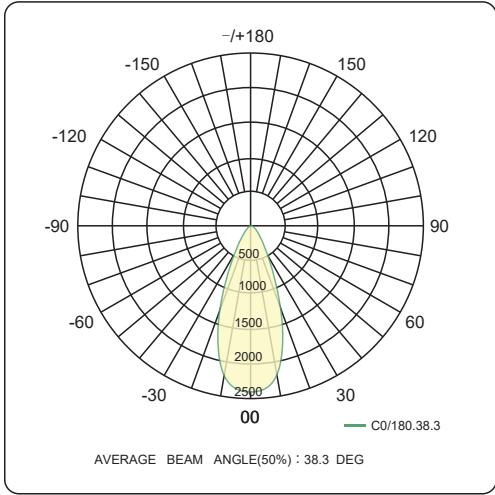


Beam angle: 25°
Delivered Lumens: 945 lumens
CCT: 4000K
CRI: 97
Power: 15W
Efficacy: 63lm/W

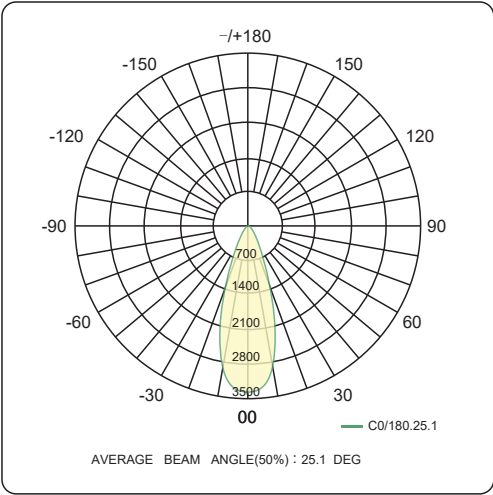

ACCESSORIES

Brackets for New-Construction (4-legs)

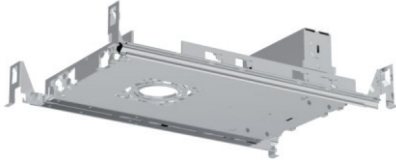


NCP-SR3-R21


Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

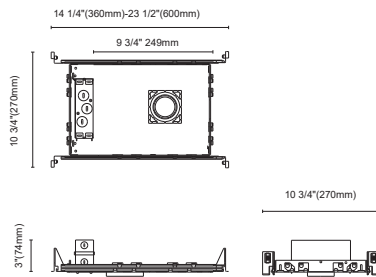

IC-BOX for New-Construction (4-legs)

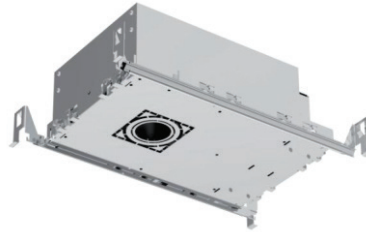


NCBX-SR3-R21

Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)


Square: □ 3" (□ 77mm)

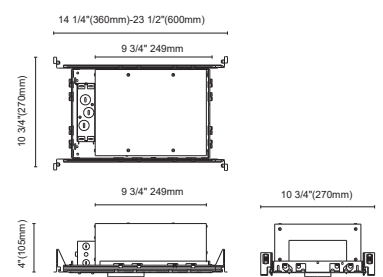

Cut out



Brackets for New-Construction

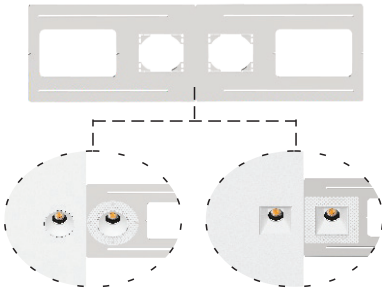


BRKT-2SR75A

Cut out:

Round: Ø 77mm*2 (Ø 77mm*2)

Square: □ 77mm*2 (□ 77mm*2)

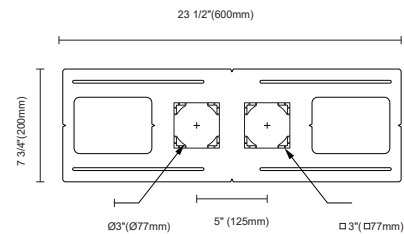

Remark




Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests







NOURDIC LIGHTING COMPANY

Locations: USA: 485 Glenbrook Dr, Lake Worth, FL 33462
Canada: 480 Warren Rd, King City ON L7B 1C4




E: info@nourdic.com
T: +1-561-695-4107

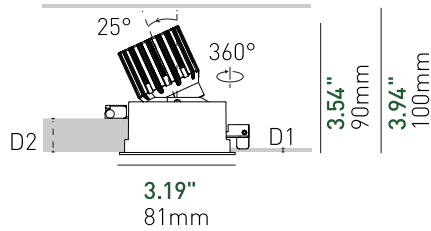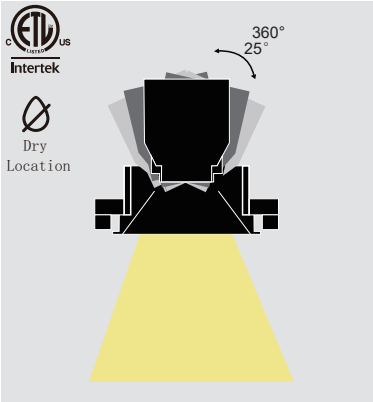




D1:min. 0.06" (1.5mm)
D2:max.0.94" (24mm)

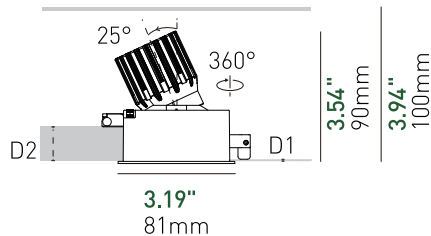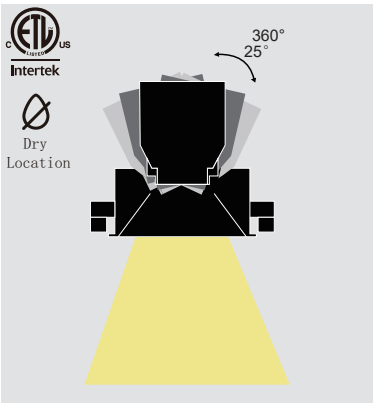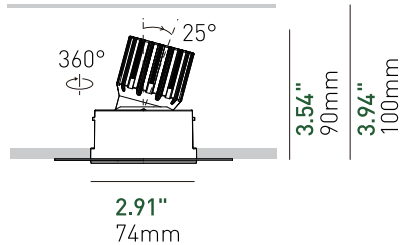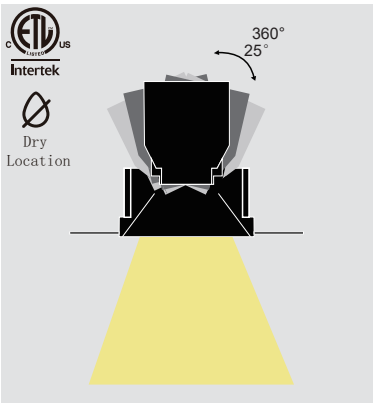

D1:min. 0.06" (1.5mm)
D2:max.0.94" (24mm)

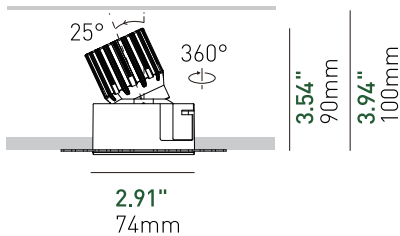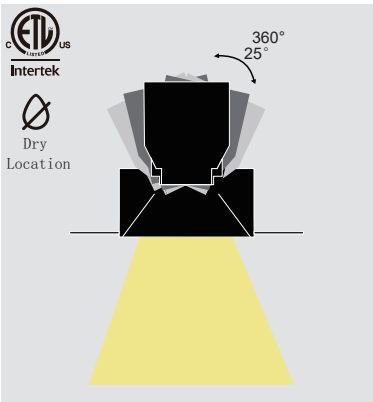

Microflange

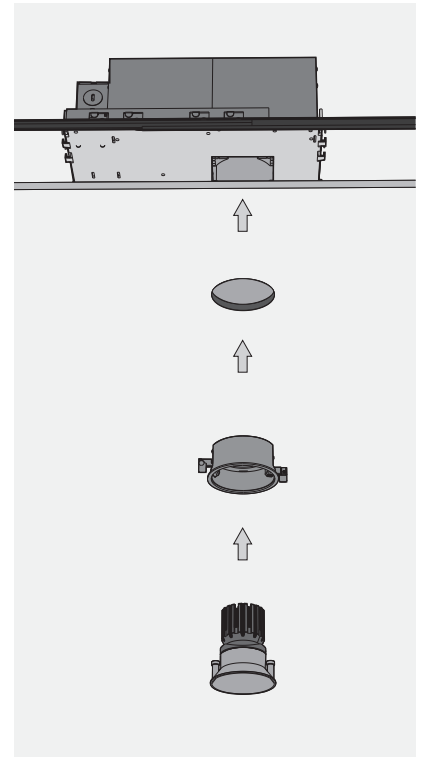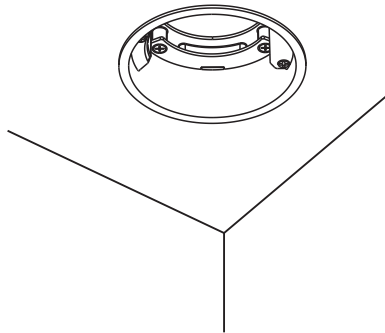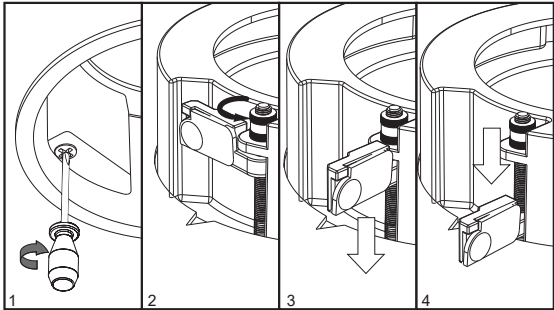

Trimless Drywall

