




N75-S01QS4



P.system	I (led)	Beam Angle	CCT	Lumens
4*15W	4*350mA	15°	2700K	3048.0lm
			3000K	3258.0lm
			4000K	3700.0lm
4*15W	4*350mA	25°	2700K	4581.0lm
			3000K	4791.0lm
			4000K	5233.0lm
4*15W	4*350mA	35°	2700K	4957.2lm
			3000K	5167.2lm
			4000K	5609.2lm
4*15W	4*350mA	50°	2700K	5326.8lm
			3000K	5536.8lm
			4000K	5978.8lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	<13	50°

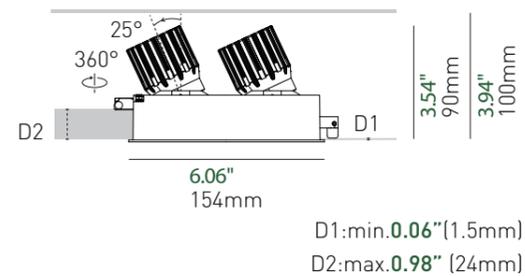


With Trim

White    Black    Golden

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI




N75-S01QS4



P.system	I (led)	Beam Angle	CCT	Lumens
4*15W	4*350mA	15°	2700K	3048.0lm
			3000K	3258.0lm
			4000K	3700.0lm
4*15W	4*350mA	25°	2700K	4581.0lm
			3000K	4791.0lm
			4000K	5233.0lm
4*15W	4*350mA	35°	2700K	4957.2lm
			3000K	5167.2lm
			4000K	5609.2lm
4*15W	4*350mA	50°	2700K	5326.8lm
			3000K	5536.8lm
			4000K	5978.8lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	<13	50°

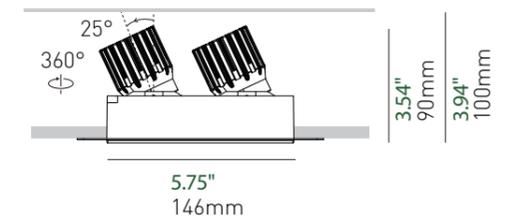


Trimless

White    Black    Golden

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


N75-S01QS4



P.system	I (led)	Beam Angle	CCT	Lumens
4*15W	4*350mA	15°	2700K	3048.0lm
			3000K	3258.0lm
			4000K	3700.0lm
4*15W	4*350mA	25°	2700K	3981.0lm
			3000K	4191.0lm
			4000K	4633.0lm
4*15W	4*350mA	35°	2700K	4357.2lm
			3000K	4567.2lm
			4000K	5009.2lm
4*15W	4*350mA	50°	2700K	4726.8lm
			3000K	4936.8lm
			4000K	5378.8lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	<16	35°




With Trim

White    Black    Golden

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI




N75-S01QS4



P.system	I (led)	Beam Angle	CCT	Lumens
4*15W	4*350mA	15°	2700K	3048.0lm
			3000K	3258.0lm
			4000K	3700.0lm
4*15W	4*350mA	25°	2700K	3981.0lm
			3000K	4191.0lm
			4000K	4633.0lm
4*15W	4*350mA	35°	2700K	4357.2lm
			3000K	4567.2lm
			4000K	5009.2lm
4*15W	4*350mA	50°	2700K	4726.8lm
			3000K	4936.8lm
			4000K	5378.8lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	<16	35°

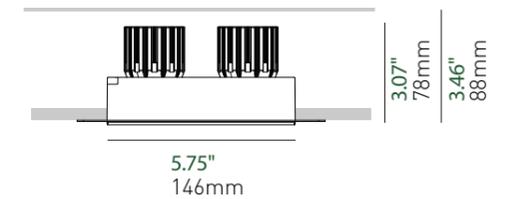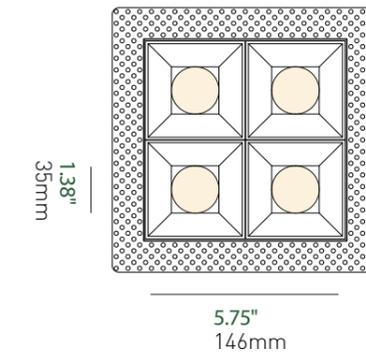

Trimless

White    Black    Golden

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI