


3" Square IP44

N - - - - -


3" Square IP44	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
N75	R Round	44	QS Microflange	B Black	B Black	B Bridgelux	90 90+ CRI 15 Watts Lumens Divd.-1335	27  2700K	50 50°	CMEM55 On/Off; Triac PhaseDim; 120VAC KIG On/Off; Triac Phase Dim; 120/277VAC *Remote Placed	NCP-SR3-R21 Non-IC Bracket NCBX-SR3-R21 IC Box BRKT-2SR75A Non-IC Bracket for Dual Lights *For more details,pls refer to page 3
	S Square		QT Trimless Drywall	W White	W White	97 97+ CRI 15 Watts Lumens Divd.-900	30  3000K	35 35°			
					G Gold		35  3500K	50 50°			
							40  4000K	35 35°			
								25 25°			
						Dim To Warm					
						90 90+ CRI 15 Watts Lumens Divd.-900	1830  1800-3000K		50 50°		
						90 90+ CRI 15 Watts Lumens Divd.-1050 *External 5CCT Selector	2765A  2700K  3000K  4000K  5000K  6500K		50 50°		
						TUNABLE WHITE			35 35°		
						90 90+ CRI 15 Watts Lumens Divd.-1050	2765  2700-6500K		25 25°	*Dali 2ch Driver Remote Placed	
N75-S44											

Photometry


Beam angle: 50°
Delivered Lumens: 1335 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 89lm/W

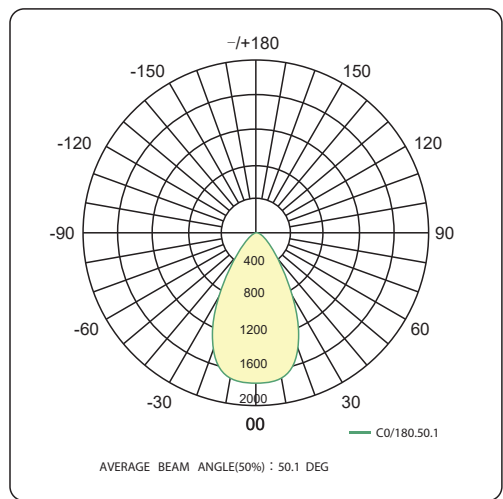

Beam angle: 35°
Delivered Lumens: 1230 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 82lm/W

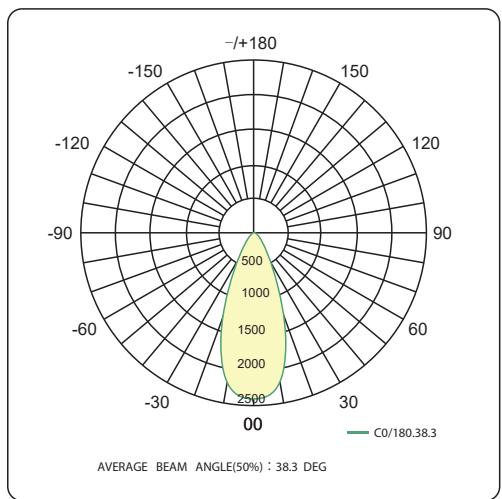


Beam angle: 25°
Delivered Lumens: 900 lumens
CCT: 4000K
CRI: 97
Power: 15W
Efficacy: 60lm/W

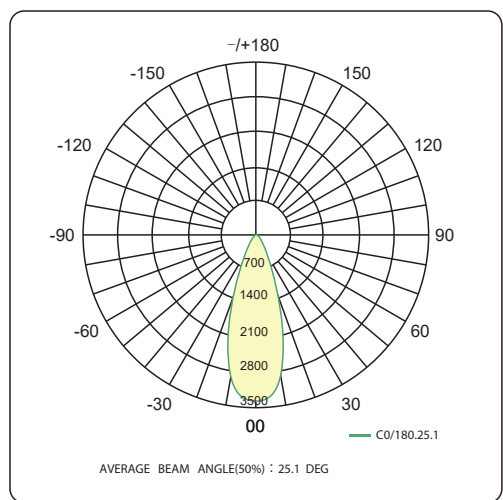

ACCESSORIES

Brackets for New-Construction (4-legs)

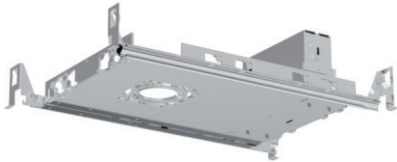


NCP-SR3-R21


Cut out:

Round: $\varnothing$ 3" ($\varnothing$ 77mm)
 $\varnothing$ 2" ($\varnothing$ 62mm)
 $\varnothing$ 1" ($\varnothing$ 50mm)

Square: $\square$ 3" ($\square$ 77mm)

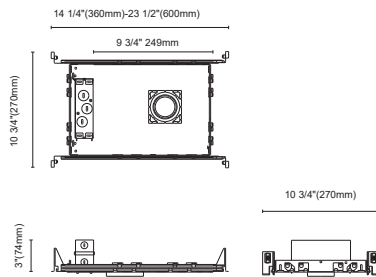

IC-BOX for New-Construction (4-legs)

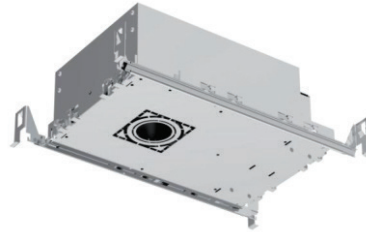


NCBX-SR3-R21





Cut out:

Round: $\varnothing$ 3" ($\varnothing$ 77mm)
 $\varnothing$ 2" ($\varnothing$ 62mm)
 $\varnothing$ 1" ($\varnothing$ 50mm)


Square: $\square$ 3" ($\square$ 77mm)

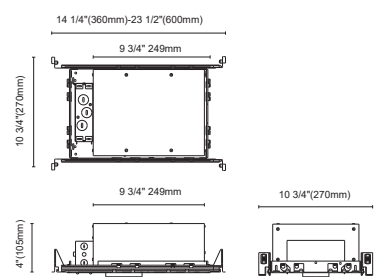

Cut out




Brackets for New-Construction

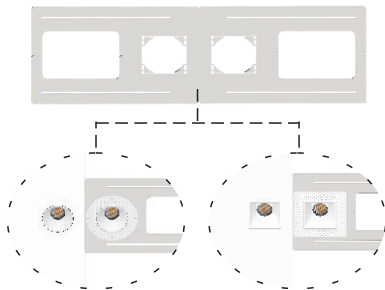

BRKT-2SR75A

Cut out:

Round: $\varnothing$ 77mm*2 ($\varnothing$ 77mm*2)
 Square: $\square$ 77mm*2 ($\square$ 77mm*2)

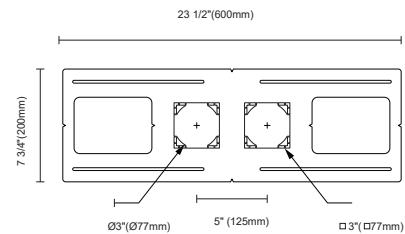

Remark



Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests



3" Square IP44

N75-S44



N75-S44

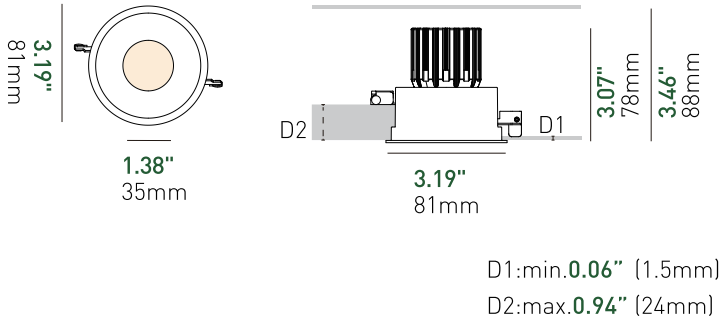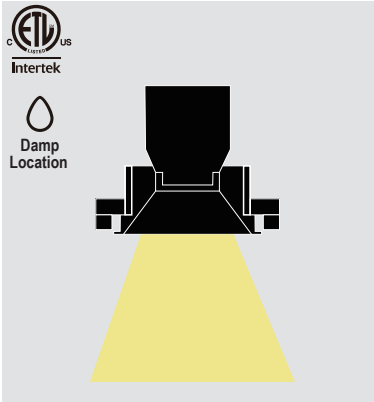



N75-S44

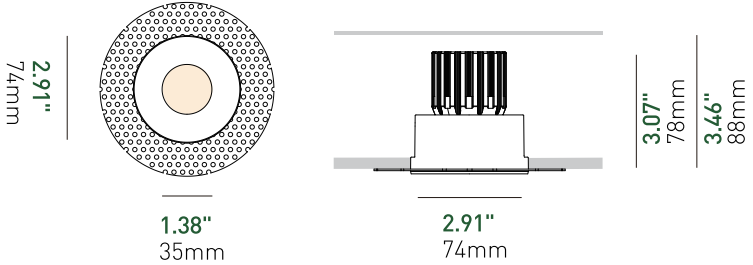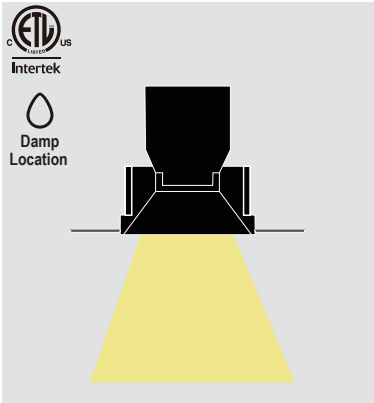




N75-S44

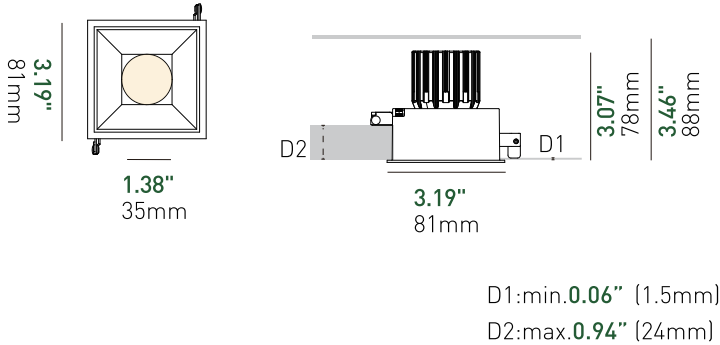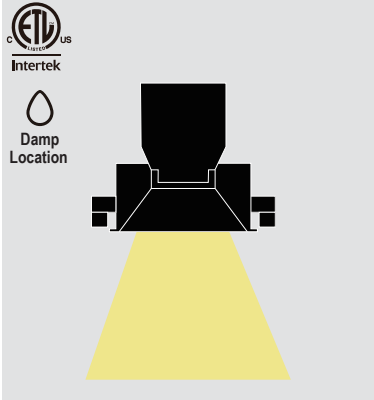

N75-S44

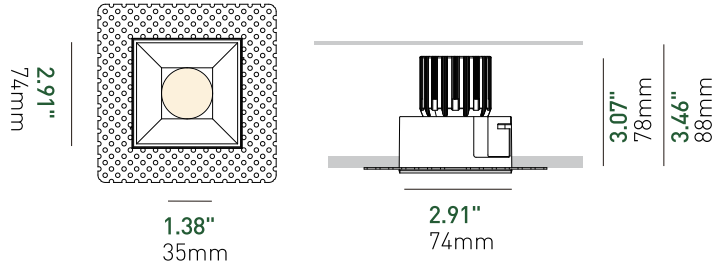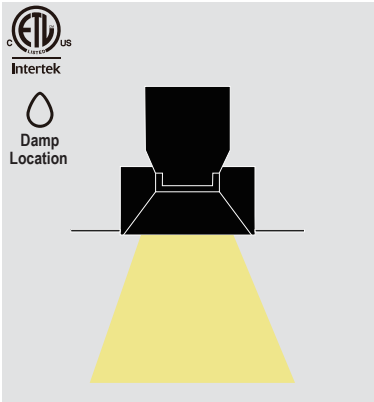

Microflange

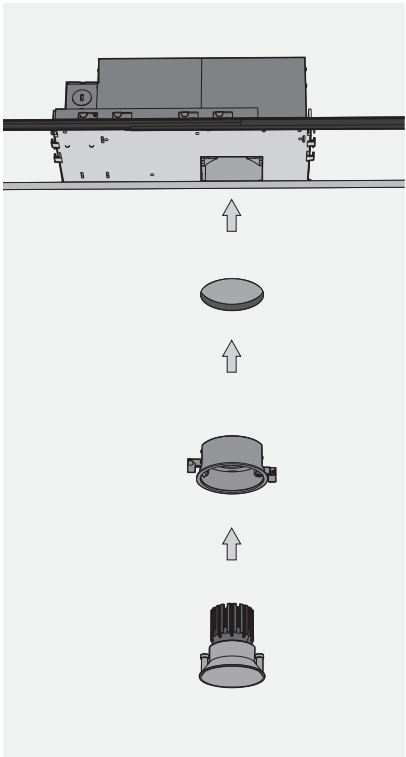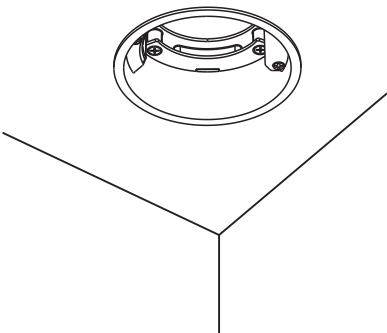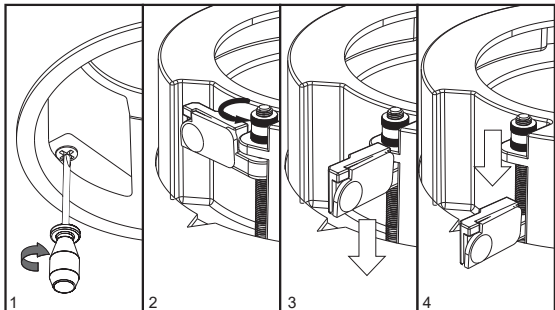

Trimless Drywall

