

PROJECT NAME: <div style="background-color: #006633; height: 20px; width: 100%;"></div>	TYPE: <div style="background-color: #006633; height: 20px; width: 100%;"></div>
--	--




# 3" Square IP44

N \_\_\_\_\_


3" Square IP44	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES		
N75	R Round	44	QS Microflange	B Black	B Black	B Bridgelux	90 90+ CRI 15 Watts Lumens Divd.-1335	27 	50 50°	CMEM55 On/Off; Triac PhaseDim; 120VAC	NCP-SR3-R21 Non-IC Bracket		
								30 				35 35°	
								35 				50 50°	
								40 				35 35°	
								40 				25 25°	
								Dim To Warm				50 50°	
	S Square	QT Trimless Drywall	W White	W White	G Gold	97 97+ CRI 15 Watts Lumens Divd.-900	90 90+ CRI 15 Watts Lumens Divd.-900	1830 	50 50°	KIG On/Off; Triac Phase Dim; 120/277VAC	NCBX-SR3-R21 IC Box	BRKT-2SR75A Non-IC Bracket for Dual Lights	
								2765A 					35 35°
								2765 					25 25°
								TUNABLE WHITE					50 50°
								2765A 					35 35°
								2765 					25 25°
N75-S44													

## Photometry


**Beam angle:** 50°  
**Delivered Lumens:** 1335 lumens  
**CCT:** 4000K  
**CRI:** 90  
**Power:** 15W  
**Efficacy:** 89lm/W

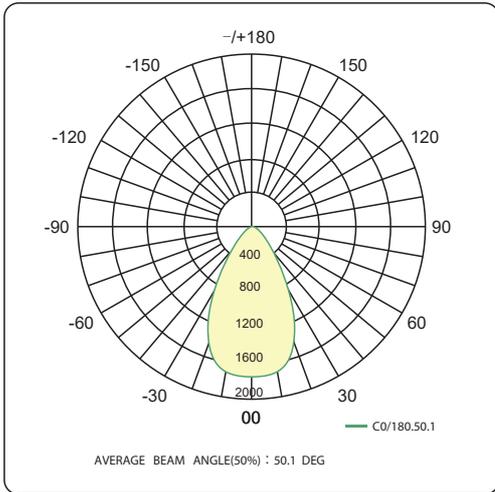

**Beam angle:** 35°  
**Delivered Lumens:** 1230 lumens  
**CCT:** 4000K  
**CRI:** 90  
**Power:** 15W  
**Efficacy:** 82lm/W

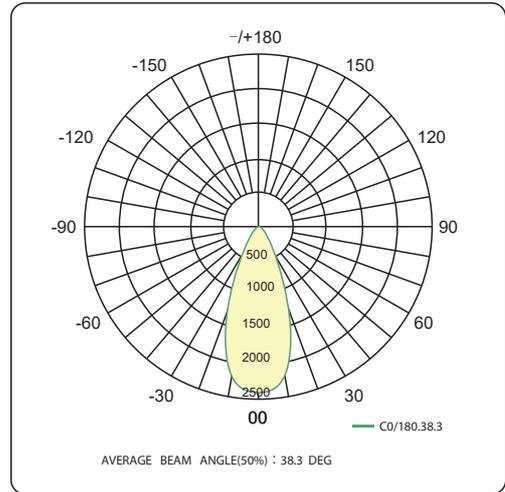

**Beam angle:** 25°  
**Delivered Lumens:** 900 lumens  
**CCT:** 4000K  
**CRI:** 97  
**Power:** 15W  
**Efficacy:** 60lm/W

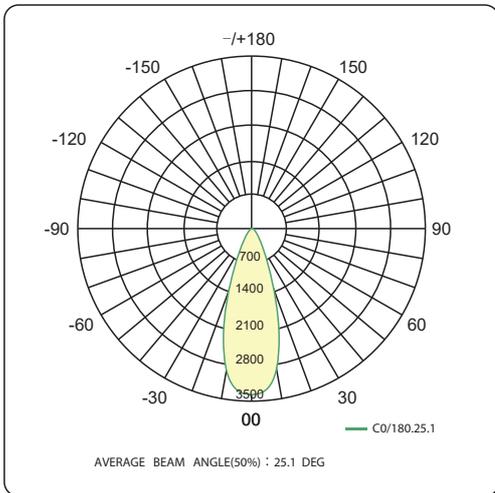


## ACCESSORIES

### Brackets for New-Construction (4-legs)



**NCP-SR3-R21**

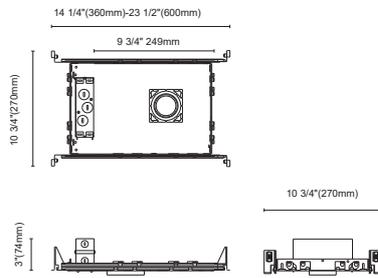


Cut out:


- Round: Ø 3" (Ø 77mm)
- Ø 2" (Ø 62mm)
- Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

### IC-BOX for New-Construction (4-legs)

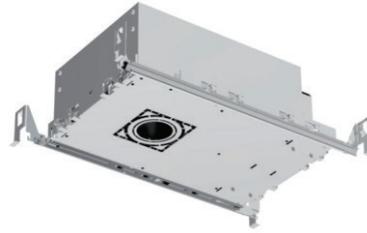

**NCBX-SR3-R21**

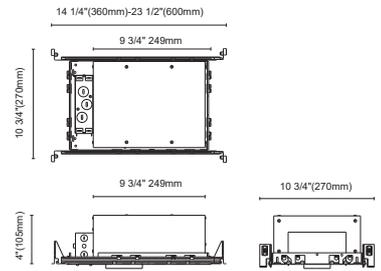


Cut out:


- Round: Ø 3" (Ø 77mm)
- Ø 2" (Ø 62mm)
- Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

### Cut out

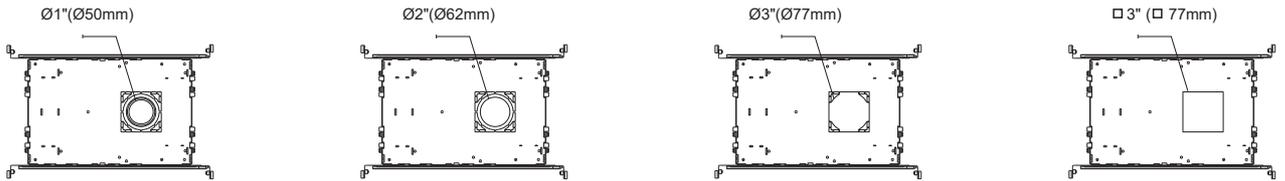


### Brackets for New-Construction

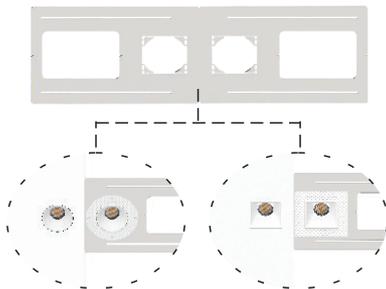

**BRKT-2SR75A**

Cut out:

- Round: Ø 77mm\*2 (Ø 77mm\*2)
- Square: □ 77mm\*2 (□ 77mm\*2)

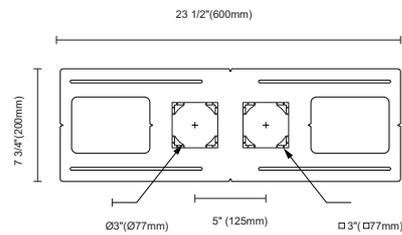

### Remark



Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket dimensions are still the same as the existing ones, 600\*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

# 3" Square IP44




N75-S44

N75-S44


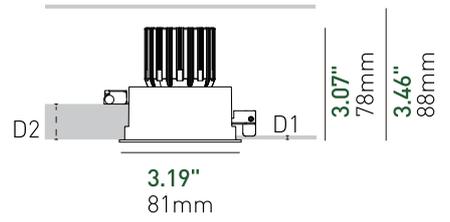
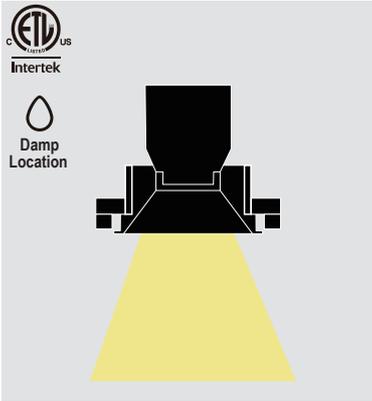


D1: min. **0.06"** (1.5mm)  
D2: max. **0.94"** (24mm)

N75-S44

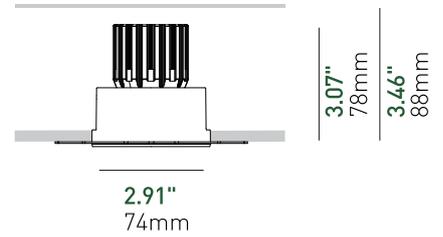

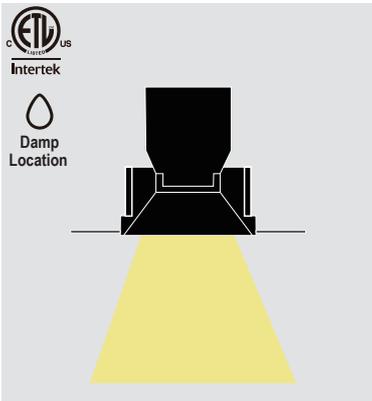


N75-S44

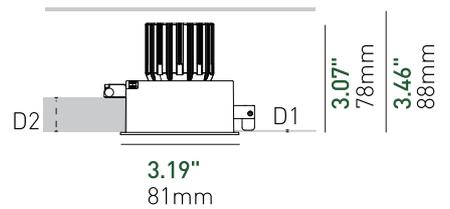

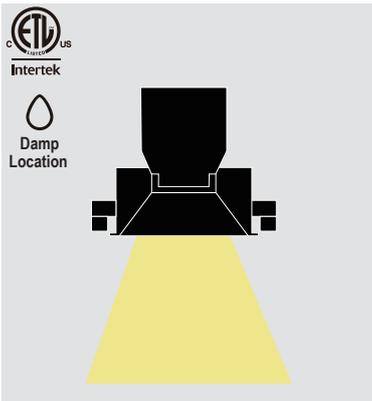


D1: min. **0.06"** (1.5mm)  
D2: max. **0.94"** (24mm)

N75-S44

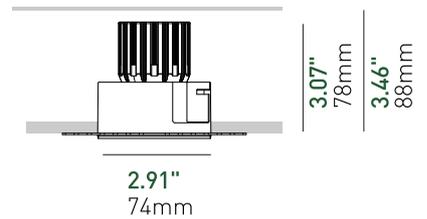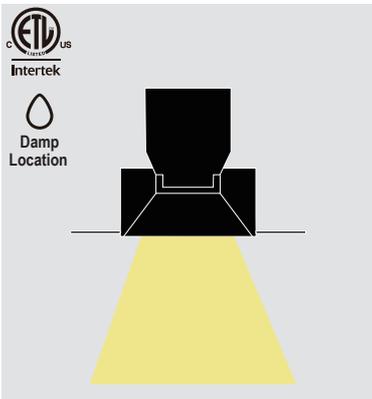

## Microflange

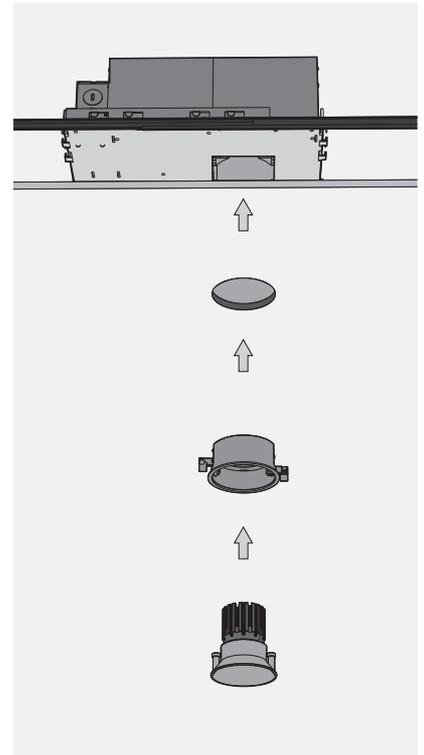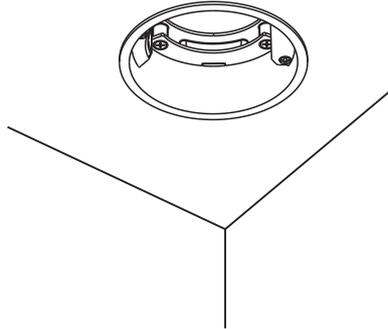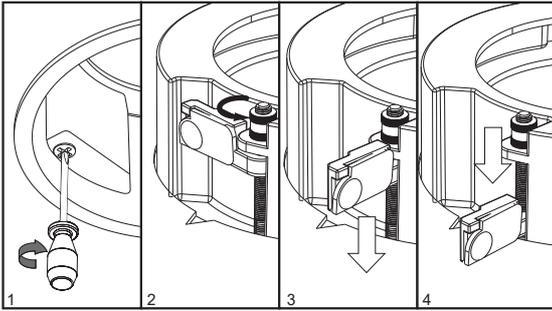

## Trimless Drywall

