


Linear series



IP20

TECHNICAL DRAWINGS

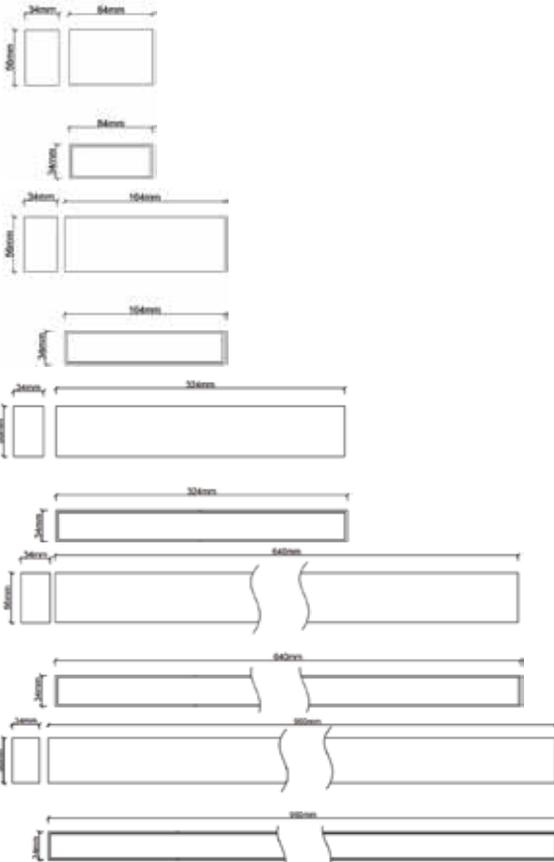

DESIGN BY
NUORDIC

DESCRIPTION

Opal lighting for general use and outlining
Average lighting on opal cover
Average performance within differernt length
External dimming interface with Triac,0/1-10V,Dali

FEATURES

Article Code: Linear series
Colour: Black/White
Installation: Magnetic
Environment: Indoor

GENERAL SPECIFICATION

CCT: 2700K/3000K/4000K
CRI: RA90
LED: OSRAM
DIM: Triac,0/1-10V,Dali

AVAILABLE MODELS

Item	Power(w)	Size(mm)	Luminious Flux(Lm)
Linear08	4W	84*34*56	225Lm
Linear16	7W	164*34*56	490Lm
Linear32	13W	324*34*56	895Lm
Linear64	26W	640*34*56	1720Lm
Linear96	39W	960*34*56	2550Lm
Linear16-DALI	6W	164*34*56	490Lm
Linear32-DALI	12W	324*34*56	895Lm
Linear64-DALI	20W	640*34*56	1720Lm
Linear96-DALI	30W	960*34*56	2550Lm

PACKAGE INFORMATION

Item	Qty/Ctn(pcs)	N.W/Ctn(kgs)	G.W/Ctn(kgs)	L*W*H(cm)
Linear08	40	6.6	8.9	44.5*23.5*23.5
Linear16	20	5.4	7.3	44.5*22*24
Linear32	20	9.8	12.2	44.5*38*28
Linear64	10	9.1	11.7	70*19*34
Linear96	10	14	16.3	101*17.5*36

LIGHT DISTRIBUTION

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

