


Linear series



IP20

TECHNICAL DRAWINGS

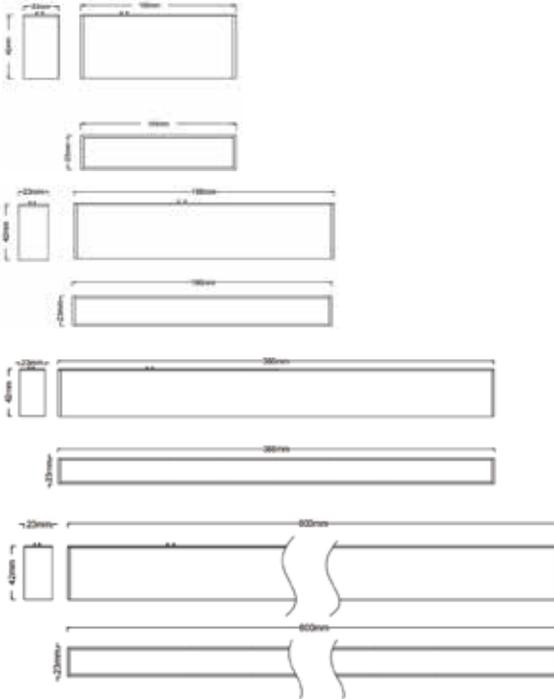

DESIGN BY

NUORDIC

DESCRIPTION

Opal lighting for general use and outlining
 Average lighting on opal cover
 Average performance within different length
 External dimming interface with Triac, 0/1-10V, Dali

FEATURES

Article Code: Linear series
 Colour: Black/White
 Installation: Magnetic
 Environment: Indoor

GENERAL SPECIFICATION

CCT: 2700K/3000K/4000K
 CRI: RA90
 LED: OSRAM
 DIM: Triac, 0/1-10V, Dali

AVAILABLE MODELS

Item	Power(w)	Size(mm)	Luminous Flux(Lm)
Linear10-s	4W	100*23*42	225Lm
Linear20-s	8W	196*23*42	605Lm
Linear40-s	15W	388*23*42	1015Lm
Linear80-s	30W	800*23*42	1970Lm
Linear20-s-DALI	8W	196*23*42	605Lm
Linear40-s-DALI	15W	388*23*42	1015Lm
Linear80-s-DALI	30W	800*23*42	1970Lm

PACKAGE INFORMATION

Item	Qty/Ctn(pcs)	N.W/Ctn(kgs)	G.W/Ctn(kgs)	L*W*H(cm)
Linear20-s	20	3.7	5.3	35*25*27.5
Linear40-s	20	6.6	9	44.5*34.5*27
Linear80-s	10	6.5	9.4	85.5*43*12

LIGHT DISTRIBUTION

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

