


PROJECT NAME:	TYPE:
---------------	-------

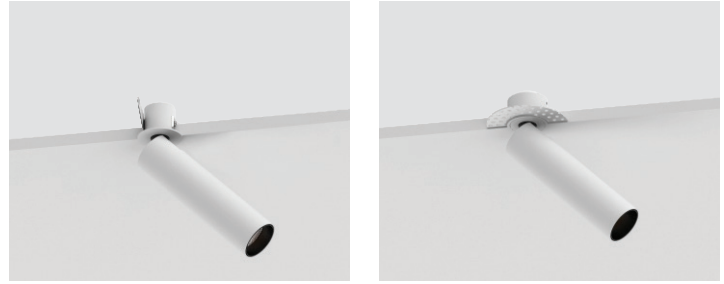


N45 _____


MODEL	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
N45	R Round	26	QS Microflange QT Trimless Drywall	B Black W White	B Black W White G Gold	B Bridgelux	90 90+ CRI 08 Watts Lumens Divd.-742	27 2700K 30 3000K 35 3500K 40 4000K	25 25° 35 35°	CMEM55 On/Off; Triac PhaseDim; 120VAC KIG On/Off; Triac Phase Dim; 120/277VAC *Remote Placed	BRKT-R25 Non-IC Bracket for Three Lights *For LN75-R26QS BRKT-R29 Non-IC Bracket for Three Lights *For LN75-R26QT *For more details,pls refer to page 3
							97 97+ CRI 08 Watts Lumens Divd.-536	1830 1800-3000K	15 15° 35 35°		
							Dim To Warm 90 90+ CRI 08 Watts Lumens Divd.-520	2765A 2700K 3000K 4000K 5000K 6500K	25 25° 35 35°		
							TUNABLE WHITE 90 90+ CRI 08 Watts Lumens Divd.-614 *External 5CCT Selector	2765 2700-6500K	15 15° 25 25° 35 35°		
N45-R-24-QS-B-B-B-90-30-15-CMEM55											

Photometry


Beam angle: 35°
Delivered Lumens: 742 lumens
CCT: 4000K
CRI: 90
Power: 8W
Efficacy: 92.7lm/w

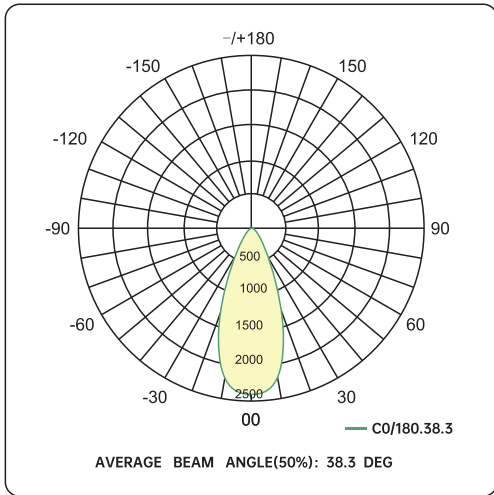

Beam angle: 25°
Delivered Lumens: 632 lumens
CCT: 4000K
CRI: 90
Power: 8W
Efficacy: 79lm/w

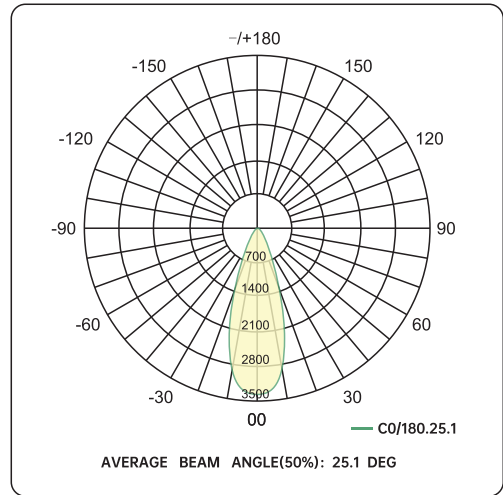

Beam angle: 15°
Delivered Lumens: 464 lumens
CCT: 4000K
CRI: 97
Power: 8W
Efficacy: 58lm/w

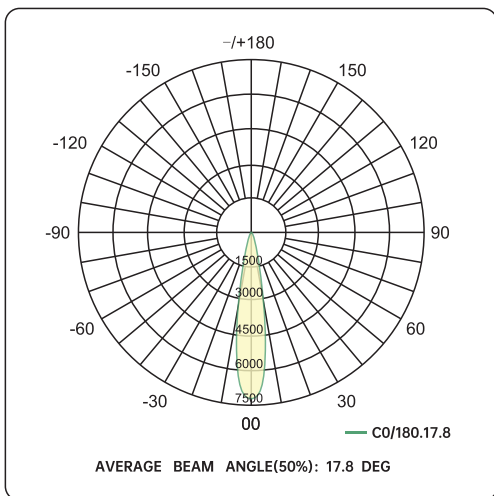


ACCESSORIES

Brackets for New-Construction



BRKT-R25

Cut out:
Round: Ø1" (Ø25mm)

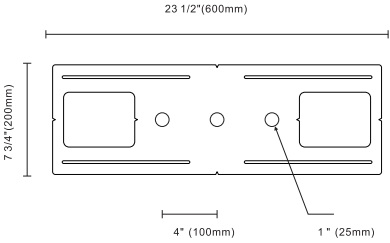


Brackets for New-Construction



BRKT-R29


Cut out:
Round: Ø1 1/4" (Ø29mm)

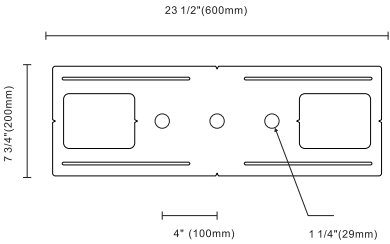

Remark

- Tailored brackets are available with a reasonable surcharge, details as below
- The customized bracket dimensions are still the same as the existing ones, 600*200mm
 - Hole sizes can be customized within the range of 25-100mm
 - Holes quantity can be indicated, 1-7pcs
 - Holes positions on the bracket can be done as requests

1 Inch Recessed Round Adjustable Spotlight

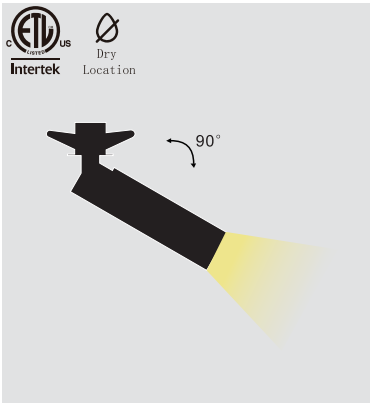

1.18"
30mm



Ø1" (Ø25mm)

1.26"
32mm




0.93"
23.5mm


90°

4.33"
110mm

1.18"
30mm

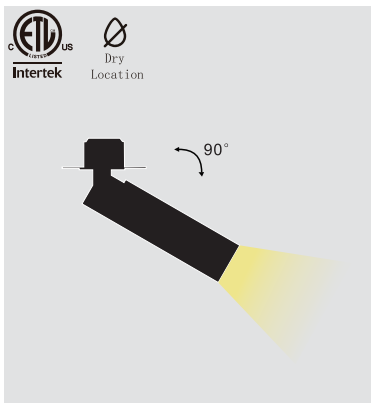

1.18"
30mm



2.36"
60mm

Ø1 1/4" (Ø29mm)

1.14"
29mm






0.93"
23.5mm

90°

4.33"
110mm

1.18"
30mm

Microflange

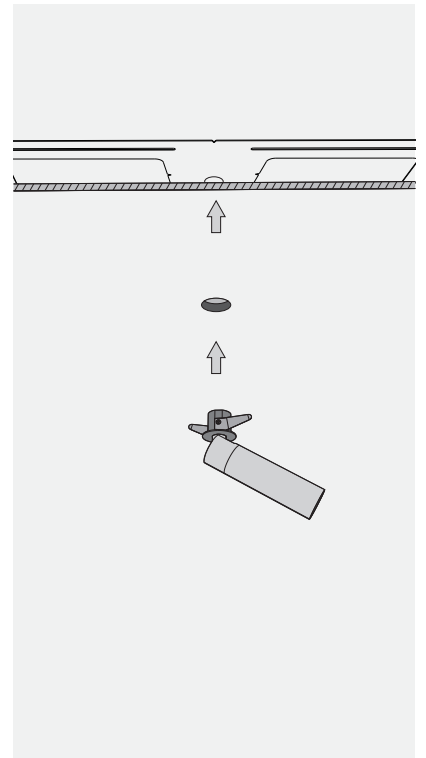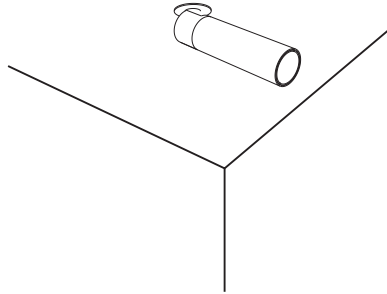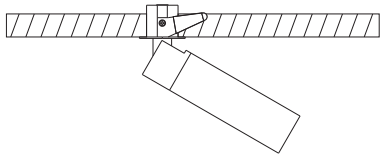

Trimless Drywall

