
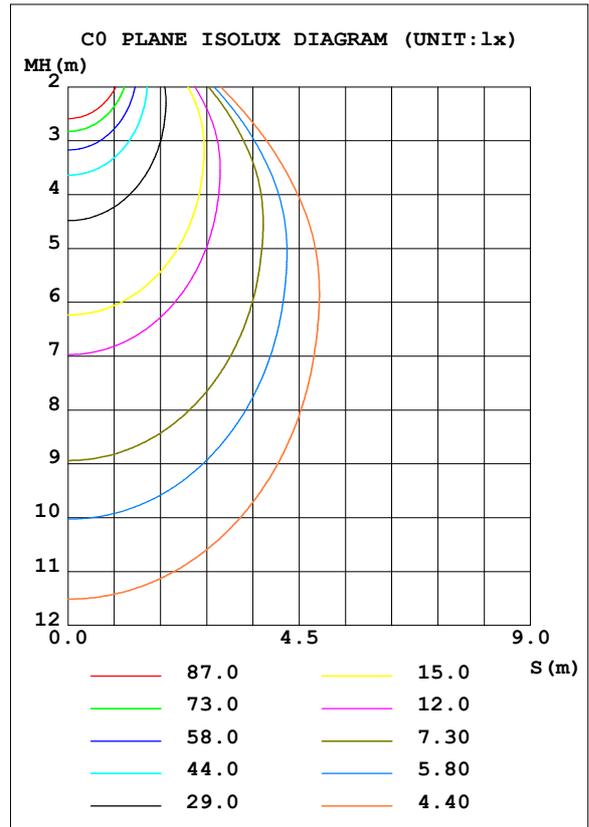


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:110.08V I:0.1277A P:13.931W PF:0.9911 Freq:49.99Hz Lamp Flux:1006.74x1 lm		
NAME: COB	TYPE:V10F90	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Nuordic Inc	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 72.27 lm/W			
MODEL	N75-R01Q	I _{max} (cd)	575.9	S/MH (C0/180)	1.09
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	1.09
RATED VOLTAGE (V)	110	TOTAL FLUX (lm)	1006.7	η UP, DN (C0-180)	0.7, 50.2
NOMINAL FLUX (lm)	1006.74	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 48.4
LAMPS INSIDE	1	η up (%)	1.4	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	110	η down (%)	98.6	CIBSE SHR MAX	1.25

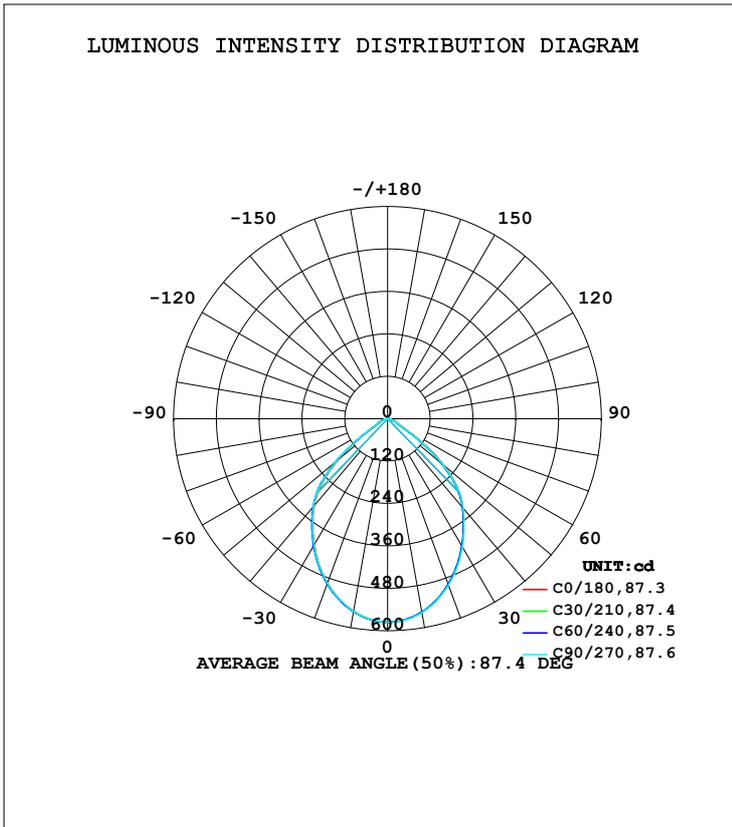

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-03-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	556.1	555.4	556.4	557.5	553.0	553.8	552.8	551.9	0- 10	53.93	53.93	5.36,5.36
20	499.2	498.3	500.3	502.3	494.1	496.1	494.6	491.9	10- 20	148.9	202.8	20.1,20.1
30	418.0	417.1	419.5	421.8	411.8	414.6	413.1	409.2	20- 30	210.7	413.6	41.1,41.1
40	328.4	327.5	329.9	331.7	321.0	324.4	323.3	319.4	30- 40	231.6	645.1	64.1,64.1
50	205.9	201.9	202.8	204.1	184.0	189.9	190.8	186.7	40- 50	205.9	851.0	84.5,84.5
60	46.77	43.89	43.73	44.33	36.80	38.50	38.94	38.62	50- 60	97.62	948.7	94.2,94.2
70	20.95	20.30	20.24	20.45	18.66	19.26	19.32	19.06	60- 70	28.17	976.8	97,97
80	7.199	6.844	6.905	7.107	5.934	6.234	6.203	5.982	70- 80	13.35	990.2	98.4,98.4
90	0.3377	0.3499	0.3539	0.3493	0.2969	0.2910	0.2896	0.2929	80- 90	2.520	992.7	98.6,98.6
100	0.7507	0.7669	0.7677	0.7571	0.6840	0.6663	0.6635	0.6725	90-100	0.5426	993.2	98.7,98.7
110	1.367	1.391	1.394	1.377	1.272	1.250	1.256	1.265	100-110	1.059	994.3	98.8,98.8
120	2.130	2.148	2.147	2.124	1.995	1.954	1.972	1.994	110-120	1.666	996.0	98.9,98.9
130	2.912	2.917	2.926	2.886	2.736	2.680	2.714	2.732	120-130	2.177	998.1	99.1,99.1
140	3.604	3.606	3.642	3.572	3.399	3.319	3.387	3.378	130-140	2.434	1001	99.4,99.4
150	4.122	4.139	4.227	4.111	3.900	3.839	3.923	3.906	140-150	2.359	1003	99.6,99.6
160	4.515	4.591	4.676	4.570	4.366	4.346	4.416	4.412	150-160	1.953	1005	99.8,99.8
170	5.153	5.199	5.224	5.165	5.054	5.011	5.040	5.070	160-170	1.352	1006	99.9,99.9
180	5.520	5.553	5.546	5.568	5.551	5.550	5.530	5.565	170-180	0.5059	1007	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-03-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:110.08V I:0.1277A P:13.931W PF:0.9911 Freq:49.99Hz Lamp Flux:1006.74x1 lm		
NAME: COB	TYPE:V10F90	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Nuordic Inc	SUR.:	Shielding Angle:

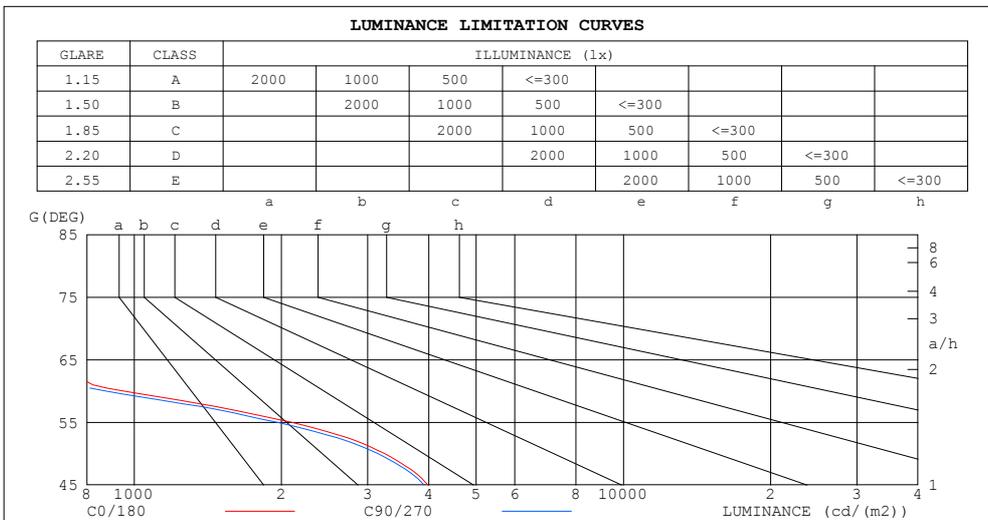

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	128	254
80	420	396
75	520	494
70	621	590
65	708	674
60	948	872
55	2091	1956
50	3246	3145
45	3985	3913


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-03-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:110.08V I:0.1277A P:13.931W PF:0.9911 Freq:49.99Hz Lamp Flux:1006.74x1 lm		
NAME: COB	TYPE:V10F90	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Nuordic Inc	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc																0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.08	1.05	1.02	1.05	1.03	1.00	1.01	.99	.97	.97	.95	.93	.93	.92	.91	.89
2.0	.97	.92	.88	.95	.91	.87	.92	.88	.84	.89	.85	.82	.85	.83	.80	.78
3.0	.88	.82	.76	.86	.81	.76	.83	.78	.74	.81	.76	.73	.78	.75	.72	.70
4.0	.80	.73	.67	.79	.72	.67	.76	.70	.66	.74	.69	.65	.72	.67	.64	.62
5.0	.73	.65	.60	.72	.65	.59	.70	.63	.59	.68	.62	.58	.66	.61	.57	.55
6.0	.67	.59	.53	.66	.58	.53	.64	.57	.53	.62	.56	.52	.60	.56	.52	.50
7.0	.61	.53	.48	.60	.53	.48	.59	.52	.48	.57	.51	.47	.56	.51	.47	.45
8.0	.56	.49	.44	.56	.48	.44	.54	.48	.43	.53	.47	.43	.52	.47	.43	.41
9.0	.52	.45	.40	.51	.44	.40	.50	.44	.39	.49	.43	.39	.48	.43	.39	.37
10.0	.48	.41	.37	.48	.41	.36	.47	.41	.36	.46	.40	.36	.45	.40	.36	.34

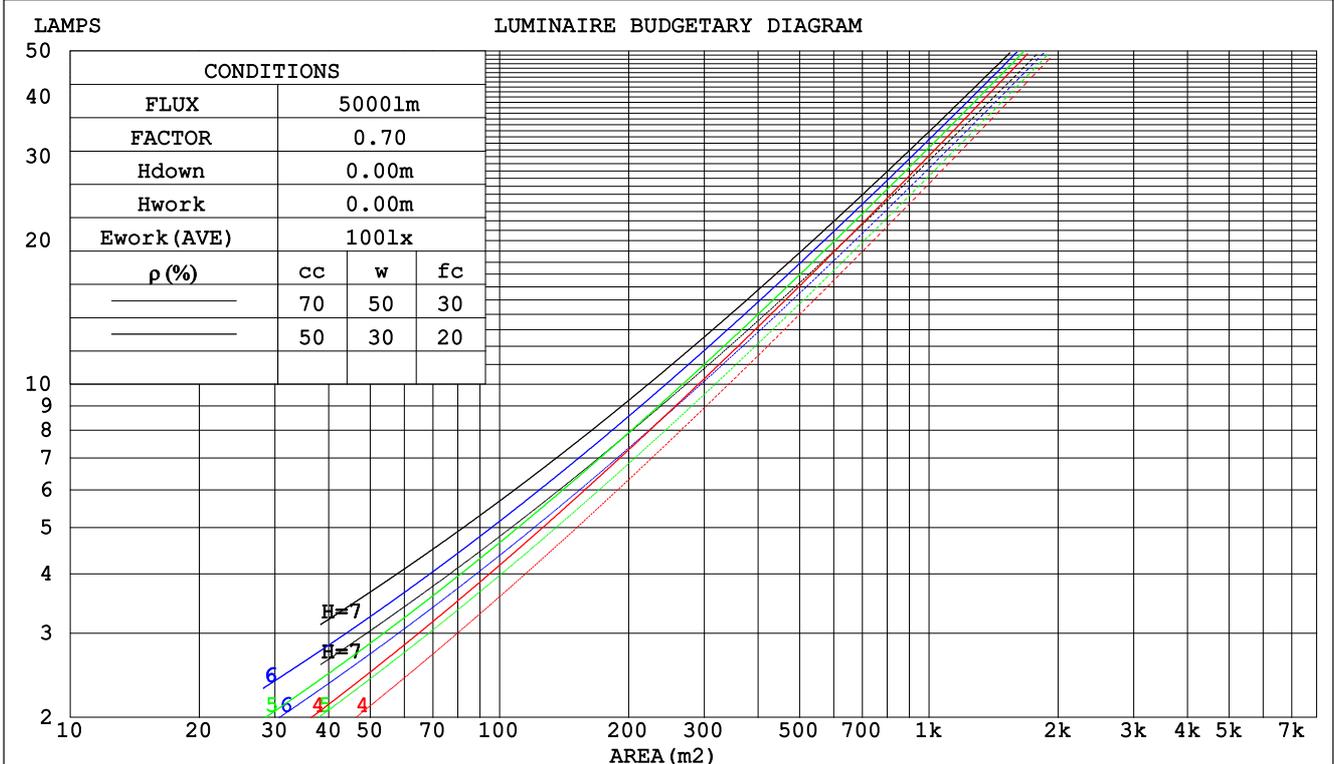

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-03-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:110.08V I:0.1277A P:13.931W PF:0.9911 Freq:49.99Hz Lamp Flux:1006.74x1 lm		
NAME: COB	TYPE:V10F90	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Nuordic Inc	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.228	.130	.041	.221	.126	.040	.207	.119	.038	.195	.112	.036	.183	.106	.034	
2.0	.222	.122	.037	.216	.119	.037	.204	.113	.035	.193	.108	.034	.183	.104	.033	
3.0	.212	.113	.034	.207	.111	.033	.196	.106	.032	.187	.102	.031	.178	.098	.030	
4.0	.201	.105	.031	.196	.103	.030	.187	.099	.030	.179	.096	.029	.171	.093	.028	
5.0	.190	.097	.028	.186	.096	.028	.178	.093	.027	.170	.090	.027	.163	.087	.026	
6.0	.180	.090	.026	.176	.089	.026	.169	.087	.025	.162	.084	.025	.156	.082	.024	
7.0	.171	.084	.024	.167	.083	.024	.161	.081	.023	.155	.079	.023	.149	.077	.023	
8.0	.162	.079	.022	.159	.078	.022	.153	.076	.022	.147	.075	.022	.142	.073	.021	
9.0	.153	.074	.021	.151	.073	.021	.145	.072	.020	.140	.070	.020	.136	.069	.020	
10.0	.146	.070	.019	.143	.069	.019	.139	.068	.019	.134	.067	.019	.130	.065	.019	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.201	.201	.201	.172	.172	.172	.117	.117	.117	.067	.067	.067	.022	.022	.022	
1.0	.185	.168	.152	.159	.144	.130	.108	.099	.090	.062	.057	.052	.020	.018	.017	
2.0	.174	.143	.117	.149	.123	.101	.102	.085	.071	.059	.050	.041	.019	.016	.014	
3.0	.164	.125	.093	.141	.108	.081	.097	.075	.057	.056	.044	.033	.018	.014	.011	
4.0	.156	.111	.076	.134	.096	.066	.092	.067	.047	.053	.039	.028	.017	.013	.009	
5.0	.149	.100	.064	.128	.086	.056	.088	.060	.039	.051	.035	.023	.016	.012	.008	
6.0	.142	.091	.055	.122	.079	.048	.084	.055	.034	.049	.033	.020	.016	.011	.007	
7.0	.136	.084	.048	.117	.073	.042	.081	.051	.030	.047	.030	.018	.015	.010	.006	
8.0	.130	.078	.043	.112	.068	.037	.077	.048	.026	.045	.028	.016	.015	.009	.005	
9.0	.125	.073	.039	.108	.064	.034	.074	.045	.024	.043	.026	.014	.014	.009	.005	
10.0	.120	.069	.035	.103	.060	.031	.072	.042	.022	.042	.025	.013	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-03-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:110.08V I:0.1277A P:13.931W PF:0.9911 Freq:49.99Hz Lamp Flux:1006.74x1 lm										
NAME: COB					TYPE:V10F90			WEIGHT:		
SPEC.:3000K					DIM.: 9mm			SERIAL No.:		
MFR.: Nuordic Inc					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.7	16.0	15.0	16.2	16.4	14.6	15.8	14.8	16.0	16.2
3H	14.7	15.9	15.0	16.1	16.4	14.6	15.7	14.9	15.9	16.2
4H	14.7	15.8	15.1	16.1	16.3	14.6	15.6	14.9	15.9	16.1
6H	14.7	15.7	15.0	16.0	16.3	14.5	15.5	14.9	15.8	16.1
8H	14.7	15.6	15.0	15.9	16.2	14.5	15.4	14.8	15.7	16.0
12H	14.6	15.5	15.0	15.8	16.2	14.5	15.4	14.8	15.7	16.0
4H 2H	14.6	15.7	14.9	15.9	16.2	14.5	15.5	14.8	15.8	16.1
3H	14.7	15.6	15.1	15.9	16.2	14.5	15.5	14.9	15.8	16.1
4H	14.7	15.6	15.1	15.9	16.2	14.6	15.4	14.9	15.7	16.1
6H	14.7	15.5	15.2	15.8	16.2	14.6	15.3	15.0	15.7	16.0
8H	14.7	15.4	15.2	15.8	16.2	14.6	15.2	15.0	15.6	16.0
12H	14.7	15.3	15.1	15.7	16.1	14.5	15.1	15.0	15.5	16.0
8H 4H	14.7	15.3	15.1	15.7	16.1	14.5	15.2	14.9	15.6	16.0
6H	14.7	15.3	15.2	15.7	16.1	14.5	15.1	15.0	15.5	16.0
8H	14.7	15.2	15.2	15.6	16.1	14.5	15.0	15.0	15.5	15.9
12H	14.7	15.1	15.2	15.6	16.1	14.5	14.9	15.0	15.4	15.9
12H 4H	14.6	15.2	15.1	15.6	16.1	14.5	15.1	14.9	15.5	15.9
6H	14.7	15.2	15.2	15.6	16.1	14.5	15.0	15.0	15.4	15.9
8H	14.7	15.1	15.2	15.6	16.1	14.5	14.9	15.0	15.4	15.9
Variations with the observer position at spacings:										
S = 1.0H	+ 1.4 / - 2.1					+ 1.5 / - 2.2				
1.5H	+ 0.8 / - 1.7					+ 0.9 / - 1.8				
2.0H	+ 3.3 / - 4.7					+ 3.4 / - 4.7				

CIE Pub.117, 1007 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.0)
 Area: 0.1 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-03-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:110.08V I:0.1277A P:13.931W PF:0.9911 Freq:49.99Hz Lamp Flux:1006.74x1 lm		
NAME: COB	TYPE:V10F90	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Nuordic Inc	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	69	59	53	68	59	53	67	58	53	47
0.80	79	69	64	78	69	63	76	68	63	57
1.00	87	78	72	85	77	72	83	78	72	66
1.25	93	85	80	92	84	79	89	83	78	72
1.50	97	90	85	95	89	84	93	87	83	77
2.00	102	96	91	100	95	91	97	93	89	82
2.50	105	99	95	103	98	94	99	95	92	84
3.00	107	102	98	105	101	97	101	98	95	87
4.00	110	106	102	108	104	101	103	100	98	90
5.00	111	108	105	109	106	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-03-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:110.08V I:0.1277A P:13.931W PF:0.9911 Freq:49.99Hz Lamp Flux:1006.74x1 lm		
NAME: COB	TYPE:V10F90	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Nuordic Inc	SUR.:	Shielding Angle:

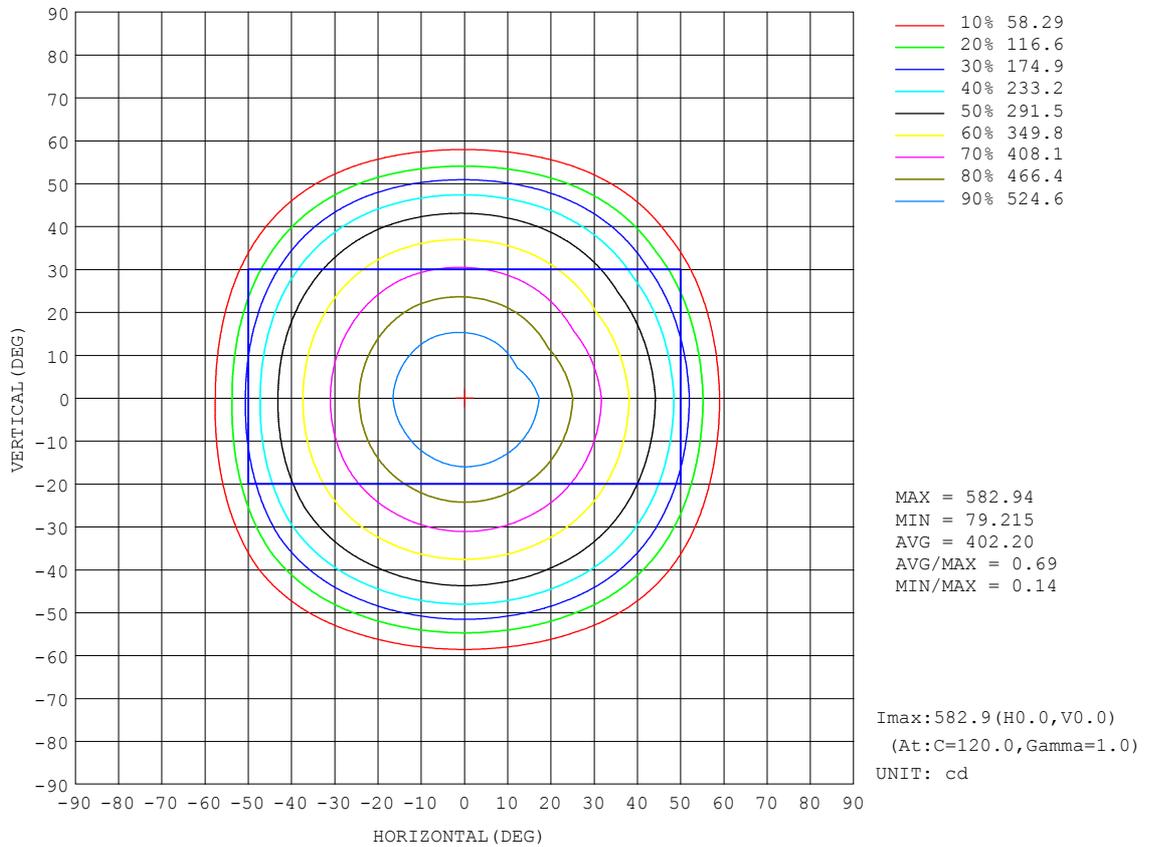


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-03-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

AAI Figure

Test:U:110.08V I:0.1277A P:13.931W PF:0.9911 Freq:49.99Hz Lamp Flux:1006.74x1 lm		
NAME: COB	TYPE:V10F90	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Nuordic Inc	SUR.:	Shielding Angle:

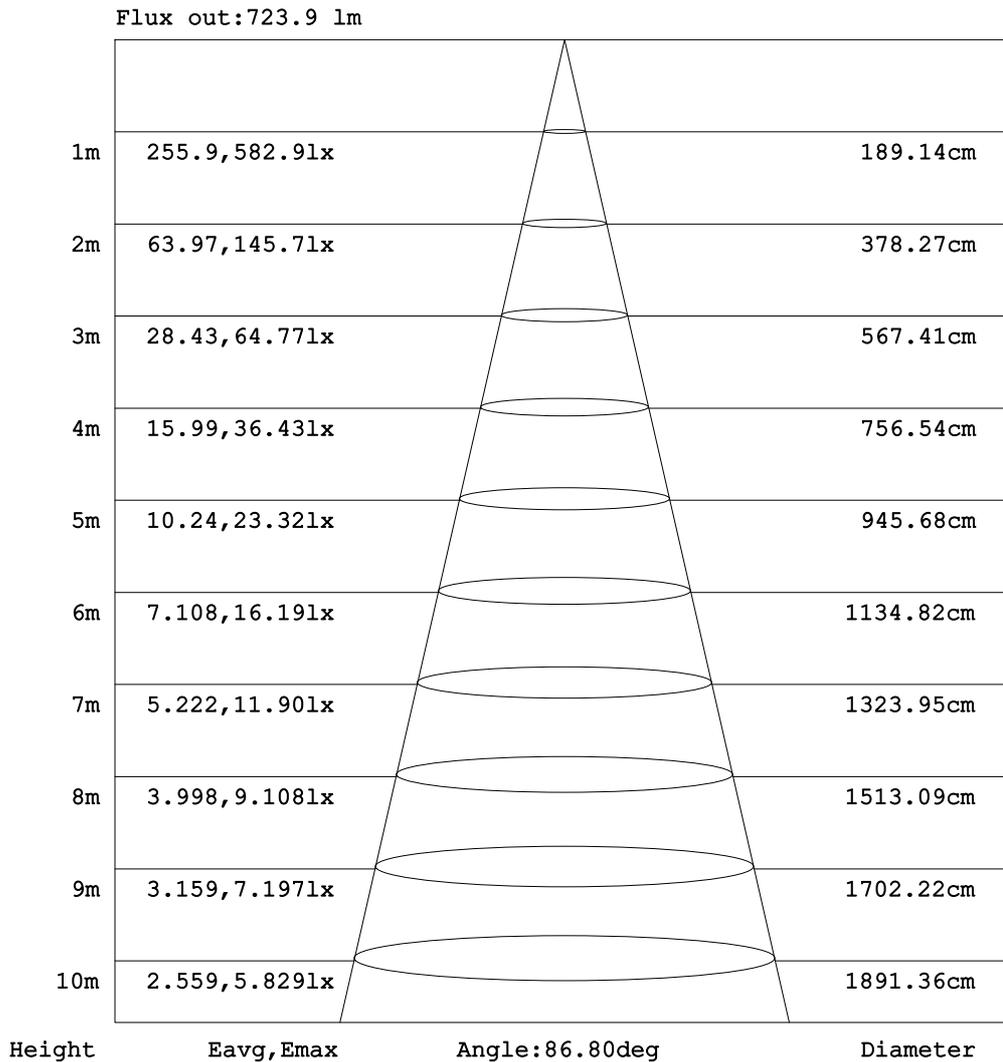


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-03-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:110.08V I:0.1277A P:13.931W PF:0.9911 Freq:49.99Hz Lamp Flux:1006.74x1 lm		
NAME: COB	TYPE:V10F90	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Nuordic Inc	SUR.:	Shielding Angle:

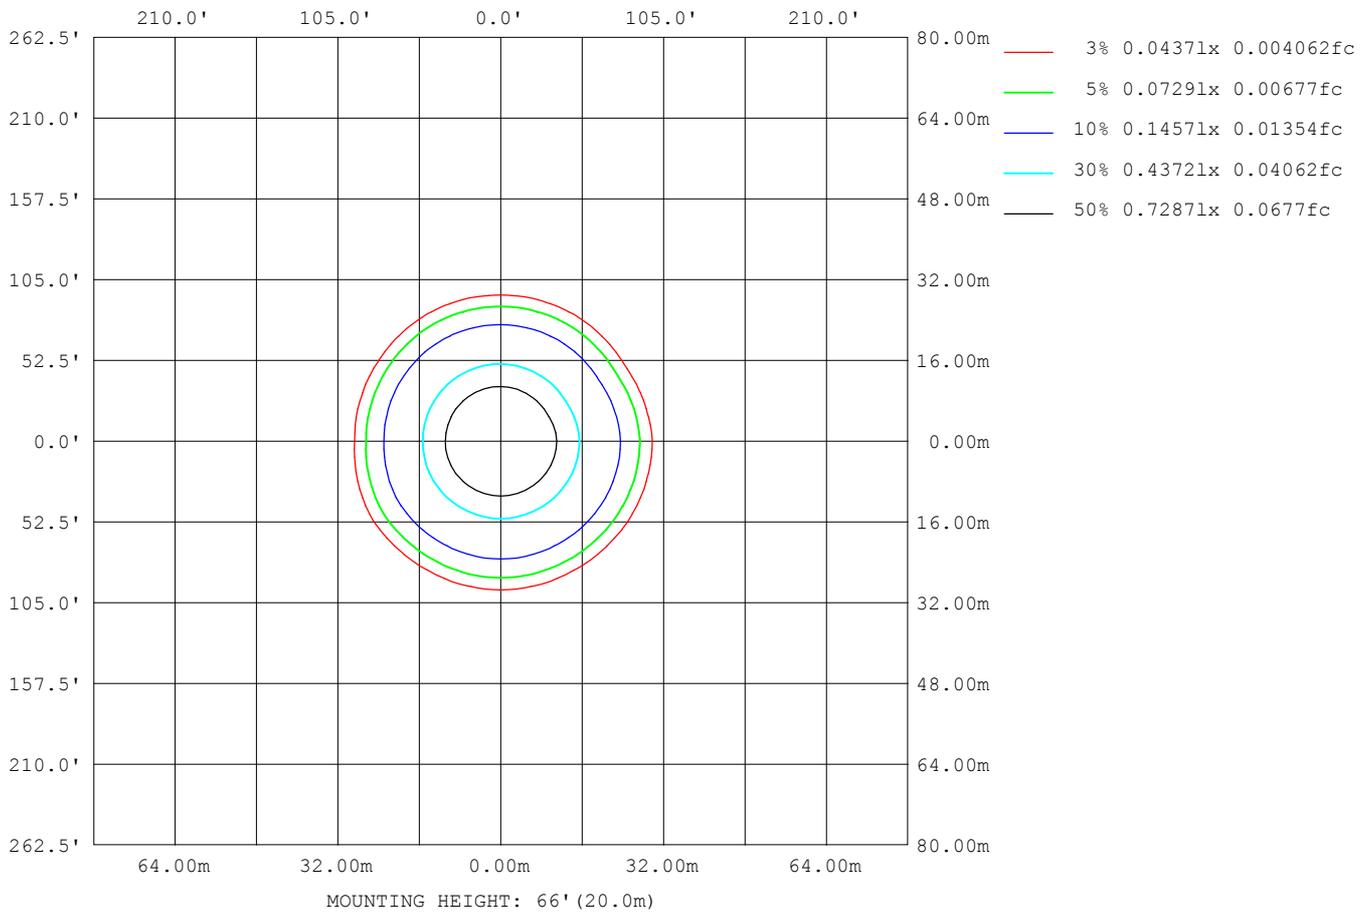

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-03-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:110.08V I:0.1277A P:13.931W PF:0.9911 Freq:49.99Hz Lamp Flux:1006.74x1 lm		
NAME: COB	TYPE:V10F90	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Nuordic Inc	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	667
L_0~180 (75) av	481
L_0~180 (85) av	115
L_90~270 (65) av	666
L_90~270 (75) av	480
L_90~270 (85) av	224
L_45 (65) av	666
L_45 (75) av	480
L_45 (85) av	231

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-03-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

Planar Illuminance Curve

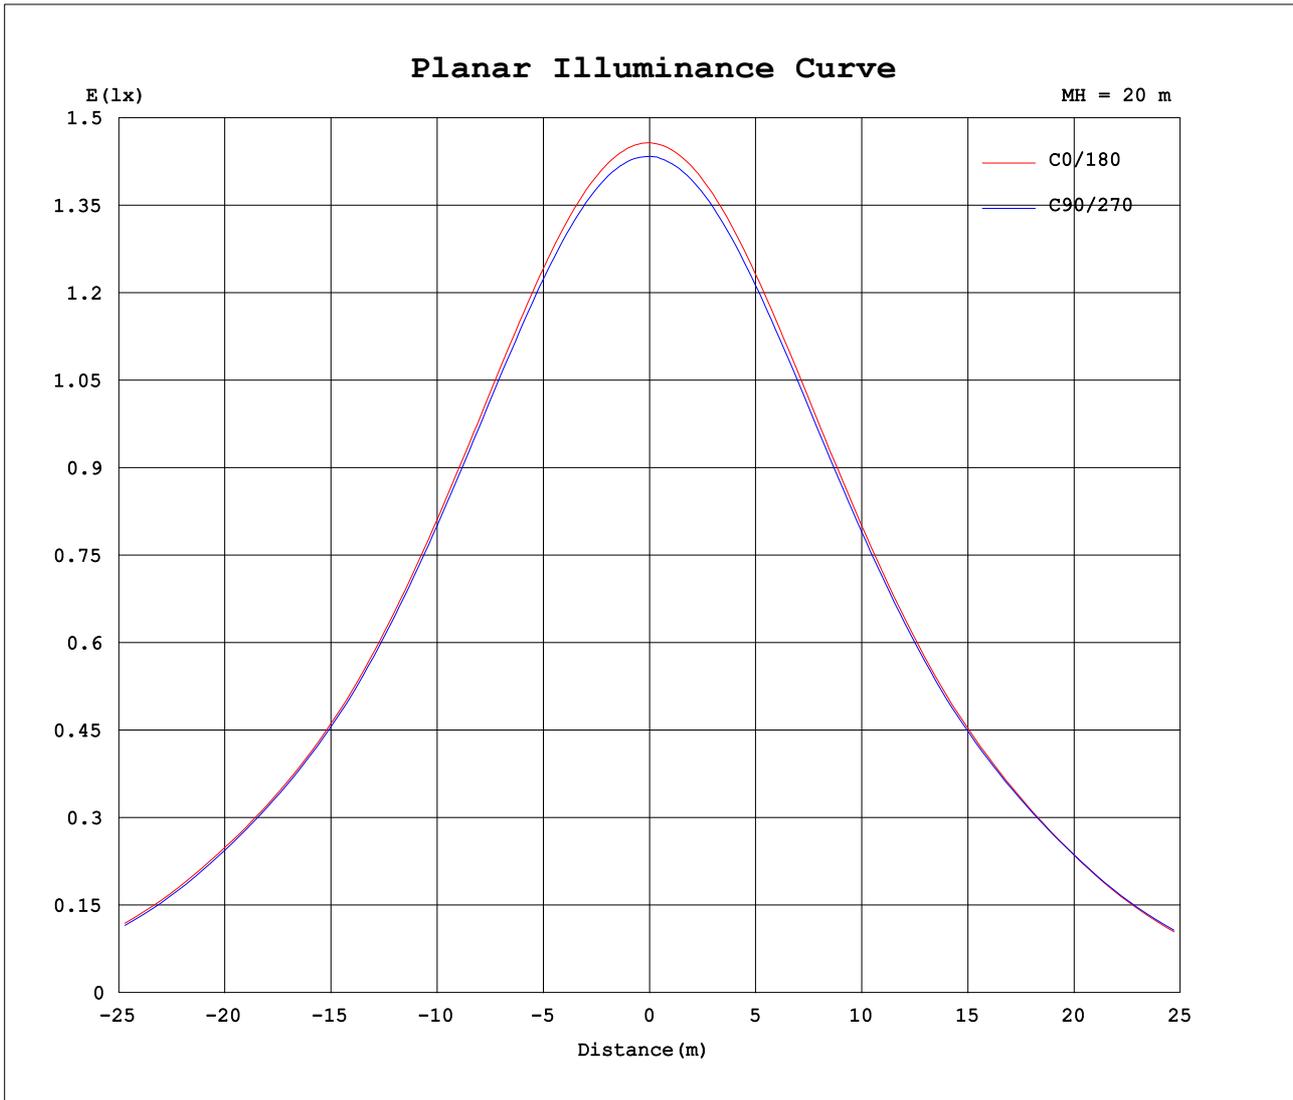

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-03-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:110.08V I:0.1277A P:13.931W PF:0.9911 Freq:49.99Hz Lamp Flux:1006.74x1 lm		
NAME: COB	TYPE:V10F90	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Nuordic Inc	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	575	575	575	575	575	575	575	575	575	575	575	575							
5	571	571	570	571	571	572	569	569	570	569	569	568							
10	556	556	555	556	557	558	553	553	554	553	553	551							
15	532	531	530	532	533	535	527	528	529	528	527	524							
20	499	499	498	500	501	503	494	496	497	495	494	490							
25	461	460	459	462	463	466	455	457	458	456	454	450							
30	418	417	417	420	420	423	412	414	416	413	411	407							
35	372	372	371	374	375	377	366	368	370	367	366	361							
40	328	328	327	330	330	333	321	323	326	323	322	317							
45	278	277	275	278	277	281	264	267	270	268	267	262							
50	206	204	200	203	202	207	184	187	192	191	190	184							
55	118	115	110	113	111	116	94.0	96.6	101	100	99.8	94.4							
60	46.8	45.2	42.6	43.7	43.0	45.7	36.8	37.7	39.3	38.9	38.9	38.3							
65	29.5	29.1	28.5	28.6	28.4	28.9	26.9	27.3	27.8	27.7	27.9	27.3							
70	21.0	20.6	20.0	20.2	20.2	20.7	18.7	19.0	19.5	19.3	19.3	18.8							
75	13.3	13.0	12.6	12.8	12.8	13.3	11.6	11.8	12.2	12.0	12.0	11.5							
80	7.20	6.99	6.70	6.90	6.94	7.28	5.93	6.10	6.37	6.20	6.17	5.79							
85	1.10	2.28	2.10	2.22	2.25	2.52	0.90	1.62	1.80	1.68	1.66	1.39							
90	0.34	0.35	0.35	0.35	0.35	0.34	0.30	0.29	0.29	0.29	0.29	0.29							
95	0.51	0.52	0.53	0.53	0.53	0.52	0.46	0.45	0.44	0.45	0.45	0.46							
100	0.75	0.76	0.77	0.77	0.77	0.75	0.68	0.67	0.66	0.66	0.66	0.68							
105	1.04	1.05	1.07	1.06	1.06	1.03	0.95	0.94	0.93	0.94	0.94	0.96							
110	1.37	1.38	1.40	1.39	1.39	1.36	1.27	1.26	1.24	1.26	1.26	1.28							
115	1.74	1.75	1.77	1.76	1.76	1.73	1.62	1.60	1.59	1.61	1.61	1.63							
120	2.13	2.14	2.15	2.15	2.13	2.11	1.99	1.96	1.95	1.97	1.98	2.01							
125	2.53	2.53	2.54	2.53	2.52	2.50	2.36	2.33	2.32	2.34	2.35	2.38							
130	2.91	2.92	2.92	2.93	2.90	2.88	2.74	2.68	2.68	2.71	2.72	2.74							
135	3.28	3.27	3.27	3.28	3.25	3.24	3.08	3.01	3.00	3.06	3.05	3.08							
140	3.60	3.60	3.61	3.64	3.59	3.55	3.40	3.32	3.32	3.39	3.37	3.39							
145	3.89	3.89	3.91	3.98	3.89	3.85	3.68	3.60	3.60	3.69	3.66	3.67							
150	4.12	4.13	4.15	4.23	4.14	4.09	3.90	3.84	3.84	3.92	3.90	3.91							
155	4.30	4.31	4.37	4.44	4.35	4.29	4.10	4.06	4.07	4.17	4.15	4.12							
160	4.52	4.55	4.63	4.68	4.60	4.54	4.37	4.34	4.36	4.42	4.44	4.38							
165	4.83	4.88	4.92	4.95	4.89	4.85	4.72	4.67	4.70	4.76	4.77	4.72							
170	5.15	5.19	5.21	5.22	5.16	5.17	5.05	5.02	5.00	5.04	5.08	5.06							
175	5.39	5.44	5.48	5.45	5.43	5.45	5.35	5.35	5.34	5.33	5.40	5.38							
180	5.52	5.56	5.55	5.55	5.55	5.58	5.55	5.54	5.56	5.53	5.56	5.57							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-03-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks: