



Round
3"



Square
3"



Round
2"



Round
1"



2025

Round



Round 3"



Round 2"



Round 1"


Square



Square 3"



Square 6"x3"



Square 6"x6"



Round 3"




Round 2"




Round 1"



Square 3"



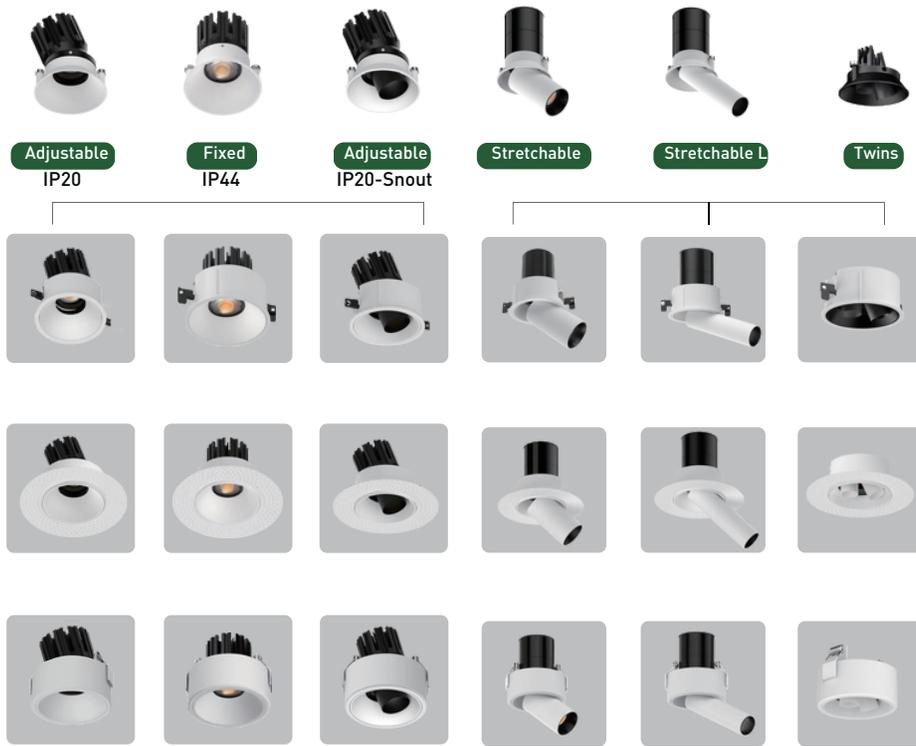

Cold-forging Heat Sink
Twice heat dissipation of the die-casting
Pure Aluminium
Formed by Cold-forging and CNC
Anodizing finishing



COB LED Chip
Bridgelux CRI 90Ra
Deep hidden light source, anti-glare



Optic lens



Component for Vertical 25° Adjusting



Component for Horizontal 360° Adjusting



Magnetic Fixing
Permanent Rare Earth Magnet
Easily assemble and disassemble,
Leaving an entrance for future driver
maintenance, without harm to gypsum ceiling



Aluminium Reflector
Much better lighting distribution than plastic.


3" Round With Trim



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0lm
			3000K	814.5lm
			4000K	925.0lm
15W	350mA	25°	2700K	1145.3lm
			3000K	1197.8lm
			4000K	1308.3lm
15W	350mA	35°	2700K	1239.3lm
			3000K	1291.8lm
			4000K	1402.3lm
15W	350mA	50°	2700K	1331.7lm
			3000K	1384.2lm
			4000K	1494.7lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	50°



With Trim



Accessories



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI



3" Round Trimless



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0lm
			3000K	814.5lm
			4000K	925.0lm
15W	350mA	25°	2700K	1145.3lm
			3000K	1197.8lm
			4000K	1308.3lm
15W	350mA	35°	2700K	1239.3lm
			3000K	1291.8lm
			4000K	1402.3lm
15W	350mA	50°	2700K	1331.7lm
			3000K	1384.2lm
			4000K	1494.7lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	50°



Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


3" Wide Spotlight With Trim



P.system	I (led)	Beam Angle	CCT	Lumens
10W	250mA	15°	2700K	490.5lm
			3000K	543.0lm
			4000K	653.5lm
10W	250mA	25°	2700K	746.0lm
			3000K	798.5lm
			4000K	909.0lm
10W	250mA	35°	2700K	808.1lm
			3000K	860.6lm
			4000K	971.1lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	45°

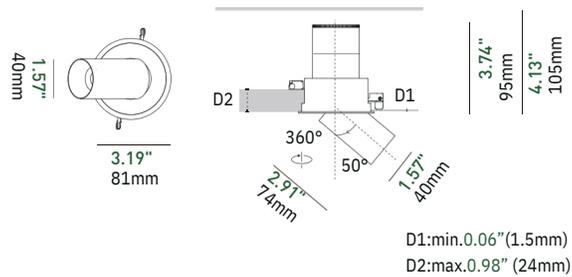

With Trim




W+W+W W+W+B B+W+B B+B+B W+W+G

Accessories



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

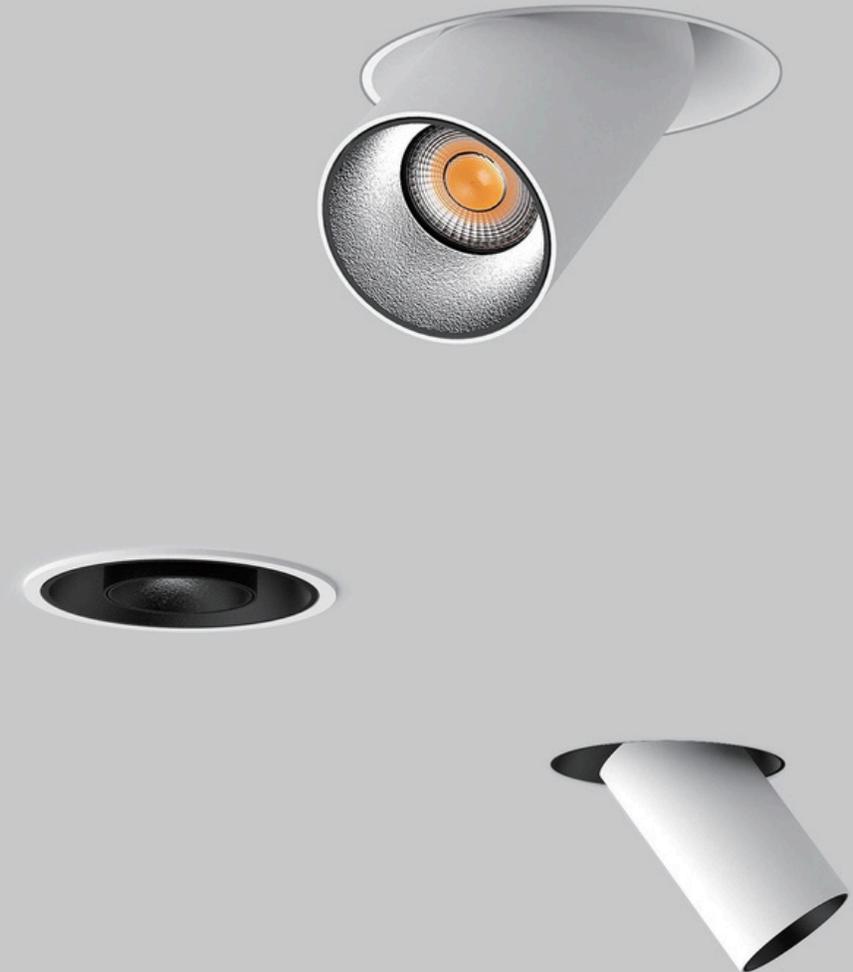


3" Wide Spotlight Trimless



P.system	I (led)	Beam Angle	CCT	Lumens
10W	250mA	15°	2700K	490.5lm
			3000K	543.0lm
			4000K	653.5lm
10W	250mA	25°	2700K	746.0lm
			3000K	798.5lm
			4000K	909.0lm
10W	250mA	35°	2700K	808.1lm
			3000K	860.6lm
			4000K	971.1lm




Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	45°

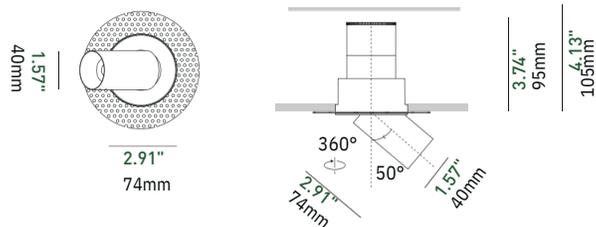

Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

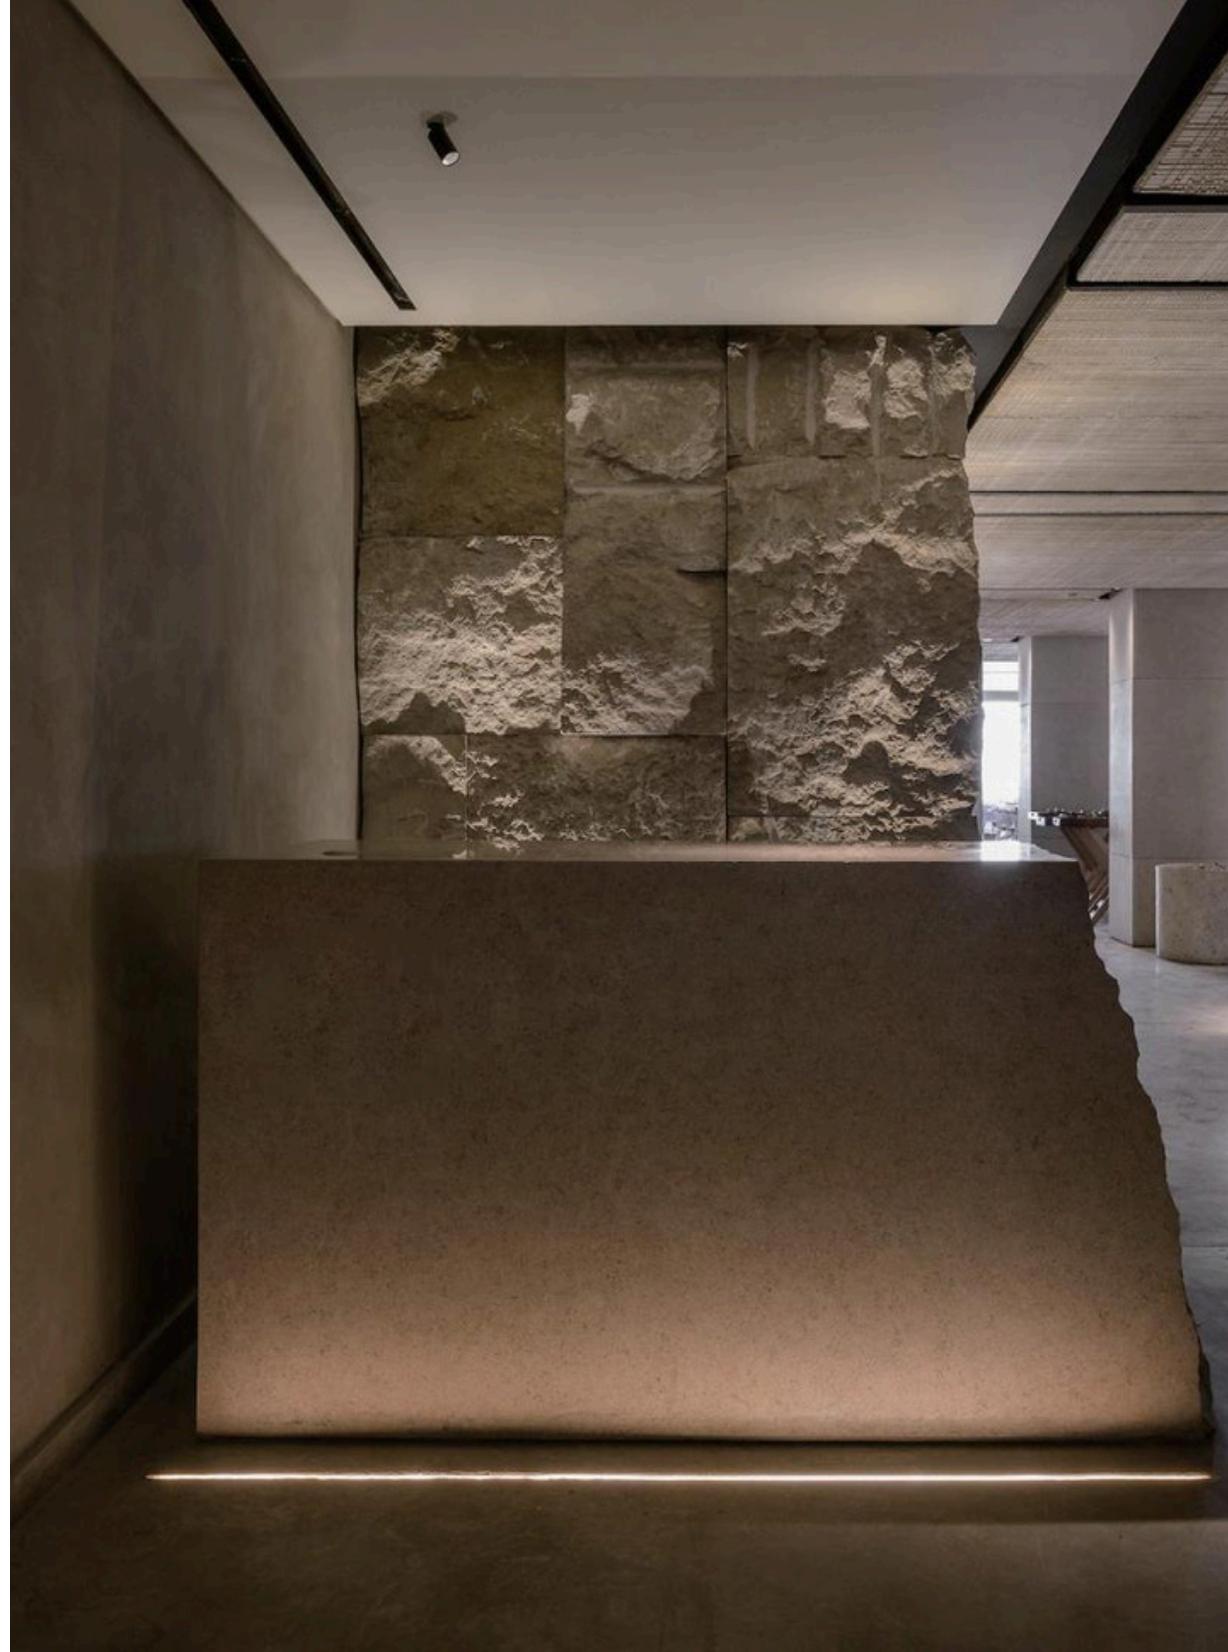


3" Flush Spotlight With Trim



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0lm
			3000K	814.5lm
			4000K	925.0lm
15W	350mA	25°	2700K	1145.3lm
			3000K	1197.8lm
			4000K	1308.3lm
15W	350mA	35°	2700K	1239.3lm
			3000K	1291.8lm
			4000K	1402.3lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	9	67°

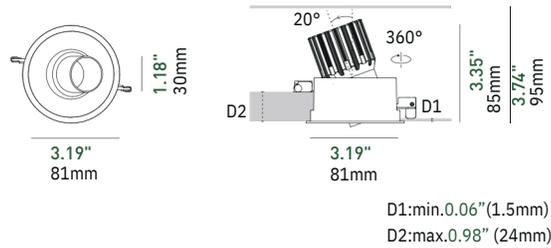

With Trim



Accessories



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


3" Flush Spotlight Trimless



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0lm
			3000K	814.5lm
			4000K	925.0lm
15W	350mA	25°	2700K	1145.3lm
			3000K	1197.8lm
			4000K	1308.3lm
15W	350mA	35°	2700K	1239.3lm
			3000K	1291.8lm
			4000K	1402.3lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	9	67°

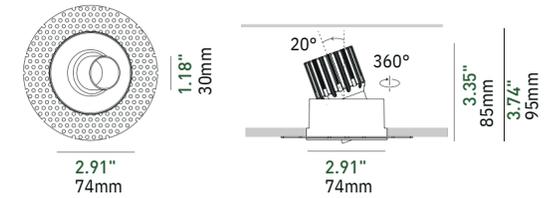

Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


3" Retractable Spotlight With Trim



P.system	I (led)	Beam Angle	CCT	Lumens
8W	200mA	15°	2700K	381.9lm
			3000K	434.4lm
			4000K	544.9lm
8W	200mA	25°	2700K	586.3lm
			3000K	638.8lm
			4000K	749.3lm
8W	200mA	35°	2700K	636.0lm
			3000K	688.5lm
			4000K	799.0lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	9	62°

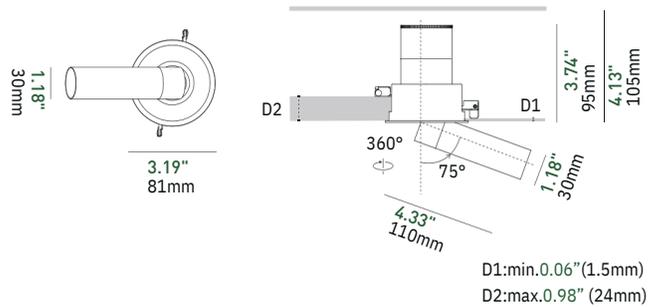

With Trim




W+W+W W+W+B W+W+G B+W+B B+B+B

Accessories



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


3" Retractable Spotlight Trimless



P.system	I (led)	Beam Angle	CCT	Lumens
8W	200mA	15°	2700K	381.9lm
			3000K	434.4lm
			4000K	544.9lm
8W	200mA	25°	2700K	586.3lm
			3000K	638.8lm
			4000K	749.3lm
8W	200mA	35°	2700K	636.0lm
			3000K	688.5lm
			4000K	799.0lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	9	62°

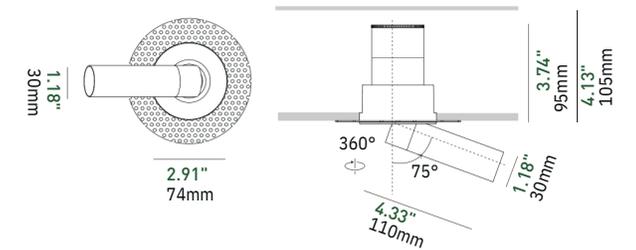

Trimless



W+W+W W+W+B W+W+G B+W+B B+B+B

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

Twins




3" Twin Mini Spotlight With Trim




P.system	I (led)	Beam Angle	CCT	Lumens
8W	200mA	25°	2700K 3000K 4000K	267.5lm 320.0lm 430.5lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	45°

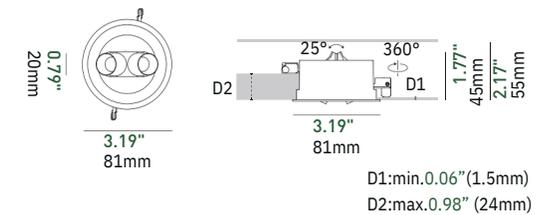


With Trim



Accessories




3" Twin Mini Spotlight Trimless



P.system	I (led)	Beam Angle	CCT	Lumens
8W	200mA	25°	2700K 3000K 4000K	267.5lm 320.0lm 430.5lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	45°

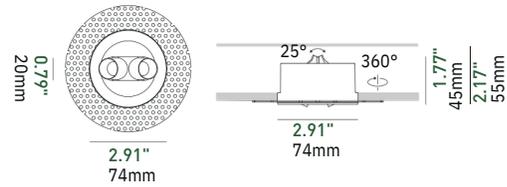

Trimless




Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

- With its innovative two adjustable spots on a single module, Twins brings genius, diverse solutions for accent lighting.
- Mini Twins, with a high-CRI LED light source, fits applications like fine artworks, corridors, indoor plants, show stands, or statues.



Twins' Four Applications

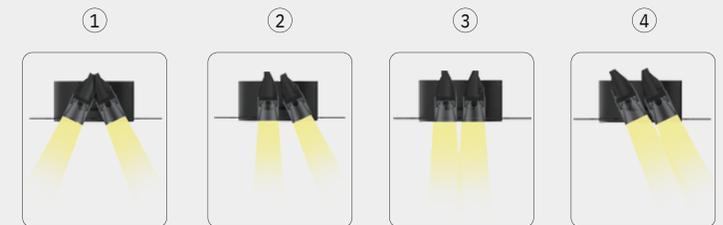



3" Fixed Round With Trim IP44



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0lm
			3000K	814.5lm
			4000K	925.0lm
15W	350mA	25°	2700K	995.3lm
			3000K	1047.8lm
			4000K	1158.3lm
15W	350mA	35°	2700K	1089.3lm
			3000K	1141.8lm
			4000K	1252.3lm
15W	350mA	50°	2700K	1181.7lm
			3000K	1234.2lm
			4000K	1344.7lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	16	35°



With Trim



Accessories



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI






3" Round Fixed Trimless IP44



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0lm
			3000K	814.5lm
			4000K	925.0lm
15W	350mA	25°	2700K	995.3lm
			3000K	1047.8lm
			4000K	1158.3lm
15W	350mA	35°	2700K	1089.3lm
			3000K	1141.8lm
			4000K	1252.3lm
15W	350mA	50°	2700K	1181.7lm
			3000K	1234.2lm
			4000K	1344.7lm




Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	16	35°

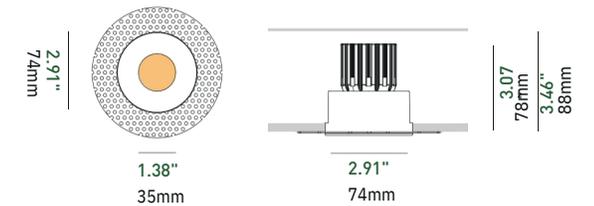

Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

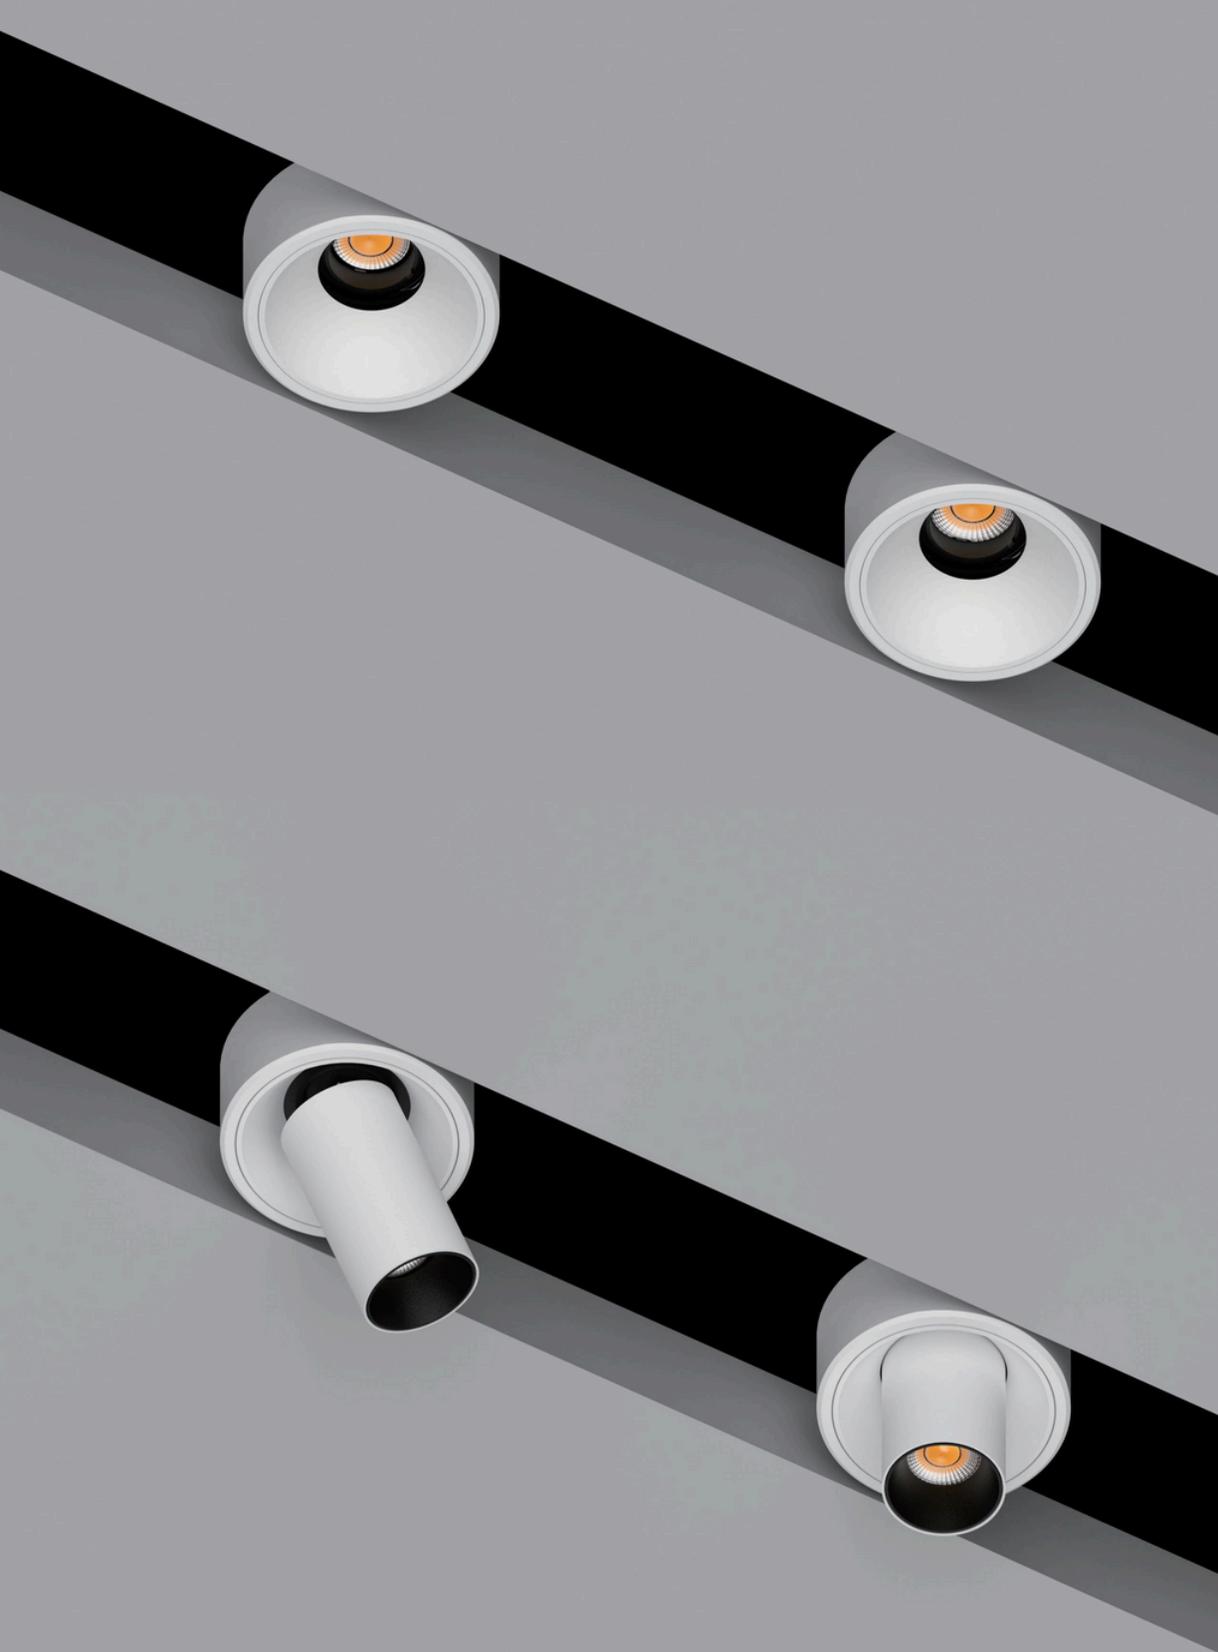


3" Round Semi-Recessed



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0lm
			3000K	814.5lm
			4000K	925.0lm
15W	350mA	25°	2700K	995.3lm
			3000K	1047.8lm
			4000K	1158.3lm
15W	350mA	35°	2700K	1089.3lm
			3000K	1141.8lm
			4000K	1252.3lm
15W	350mA	50°	2700K	1331.7lm
			3000K	1384.2lm
			4000K	1494.7lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	50°

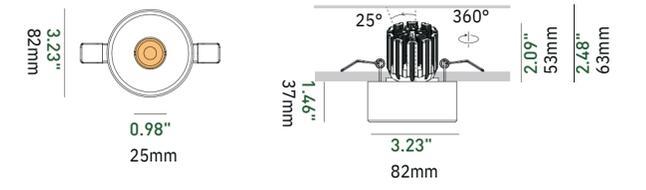

Color



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI




3" Wide Spotlight Semi Recessed



P.system	I (led)	Beam Angle	CCT	Lumens
10W	250mA	15°	2700K	490.5lm
			3000K	543.0lm
			4000K	653.5lm
10W	250mA	25°	2700K	746.0lm
			3000K	798.5lm
			4000K	909.0lm
10W	250mA	35°	2700K	808.1lm
			3000K	860.6lm
			4000K	971.1lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	45°

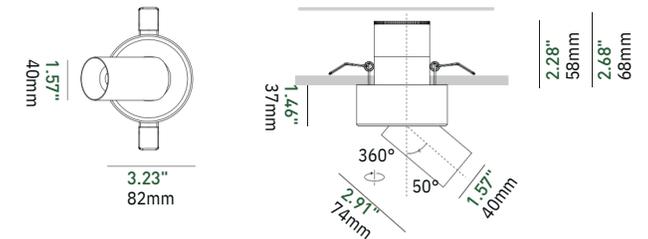

Color



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


3" Round Fixed Semi-Recessed IP44



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0lm
			3000K	814.5lm
			4000K	925.0lm
15W	350mA	25°	2700K	995.3lm
			3000K	1047.8lm
			4000K	1158.3lm
15W	350mA	35°	2700K	1089.3lm
			3000K	1141.8lm
			4000K	1252.3lm
15W	350mA	50°	2700K	1181.7lm
			3000K	1234.2lm
			4000K	1344.7lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	16	35°

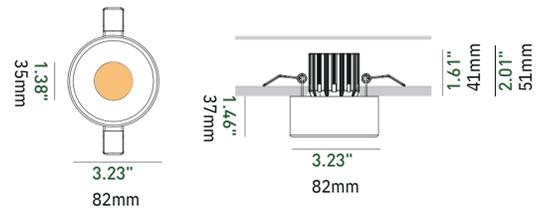

Color



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


3" Flush Spotlight Semi Recessed



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0lm
			3000K	814.5lm
			4000K	925.0lm
15W	350mA	25°	2700K	1145.3lm
			3000K	1197.8lm
			4000K	1308.3lm
15W	350mA	35°	2700K	1239.3lm
			3000K	1291.8lm
			4000K	1402.3lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	9	67°

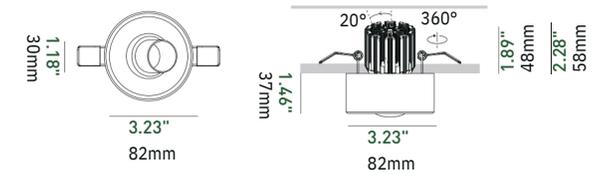

Color



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI



3" Retractable Spotlight Semi-Recessed



P.system	I (led)	Beam Angle	CCT	Lumens
8W	200mA	15°	2700K	381.9lm
			3000K	434.4lm
			4000K	544.9lm
8W	200mA	25°	2700K	586.3lm
			3000K	638.8lm
			4000K	749.3lm
8W	200mA	35°	2700K	636.0lm
			3000K	688.5lm
			4000K	799.0lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	9	62°

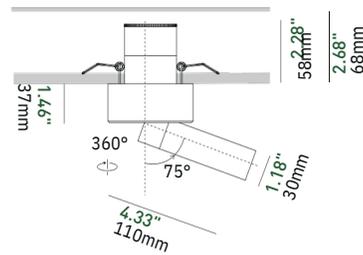

Color



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


3" Mini-Twin Spotlight Semi-Recessed



P.system	I (led)	Beam Angle	CCT	Lumens
8W	200mA	25°	2700K	267.5lm
			3000K	320.0lm
			4000K	430.5lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	45°

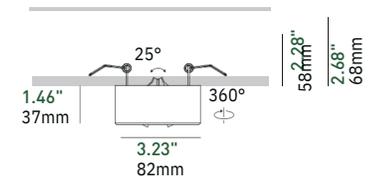


Color



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

3"

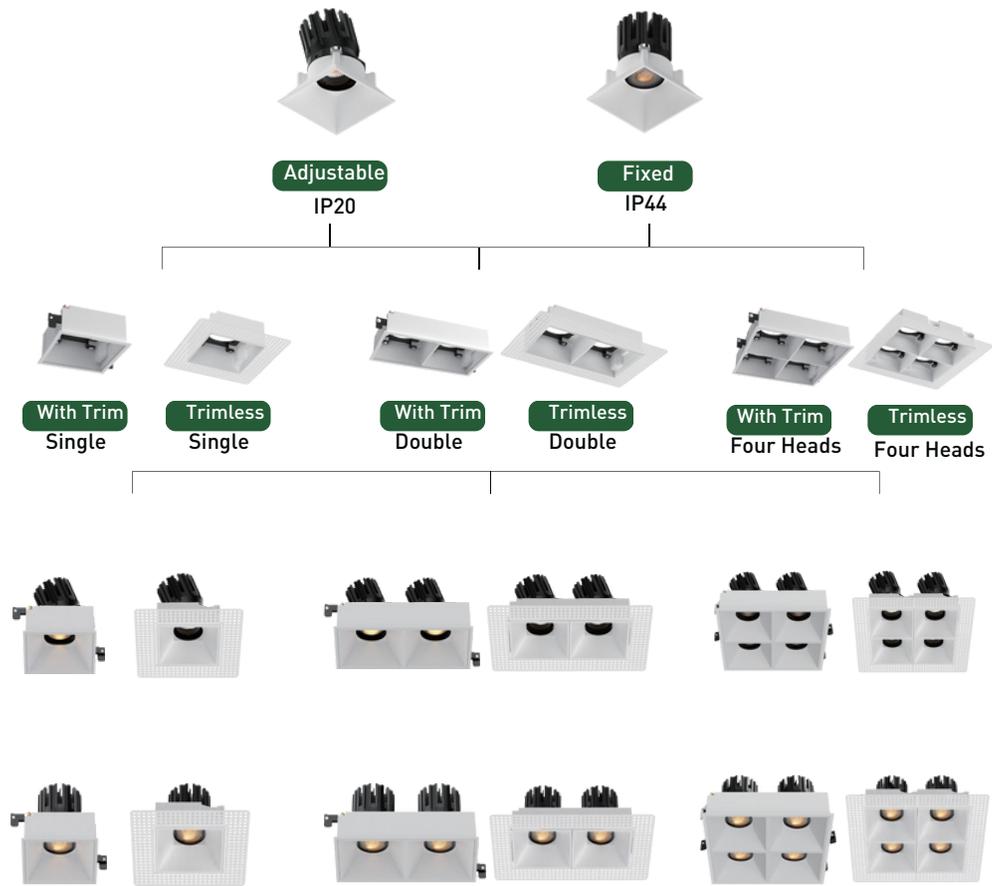


3" Square With Trim



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0lm
			3000K	814.5lm
			4000K	925.0lm
15W	350mA	25°	2700K	1145.3lm
			3000K	1197.8lm
			4000K	1308.3lm
15W	350mA	35°	2700K	1239.3lm
			3000K	1291.8lm
			4000K	1402.3lm
15W	350mA	50°	2700K	1331.7lm
			3000K	1384.2lm
			4000K	1494.7lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	50°

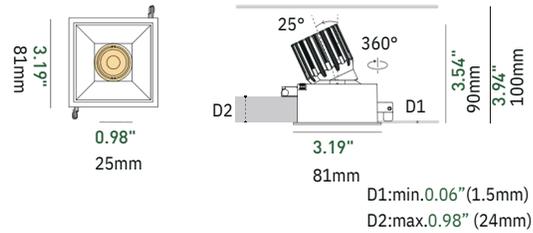

With Trim



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


3" Square Trimless




P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0lm
			3000K	814.5lm
			4000K	925.0lm
15W	350mA	25°	2700K	1145.3lm
			3000K	1197.8lm
			4000K	1308.3lm
15W	350mA	35°	2700K	1239.3lm
			3000K	1291.8lm
			4000K	1402.3lm
15W	350mA	50°	2700K	1331.7lm
			3000K	1384.2lm
			4000K	1494.7lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	50°

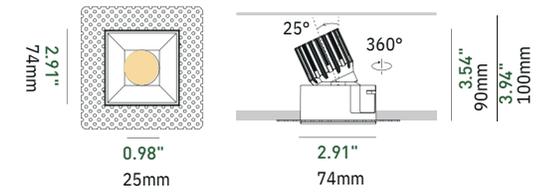

Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


3" Double Square With Trim



P.system	I (led)	Beam Angle	CCT	Lumens
2*15W	2*350mA	15°	2700K	1524.0lm
			3000K	1629.0lm
			4000K	1850.0lm
2*15W	2*350mA	25°	2700K	2290.5lm
			3000K	2395.5lm
			4000K	2616.5lm
2*15W	2*350mA	35°	2700K	2478.6lm
			3000K	2583.6lm
			4000K	2804.6lm
2*15W	2*350mA	50°	2700K	2663.4lm
			3000K	2768.4lm
			4000K	2989.4lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	50°

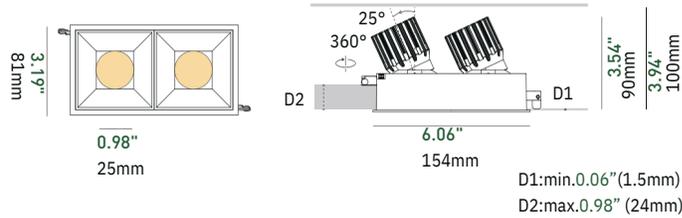


With Trim



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


3" Double Square Trimless



P.system	I (led)	Beam Angle	CCT	Lumens
2*15W	2*350mA	15°	2700K	1524.0lm
			3000K	1629.0lm
			4000K	1850.0lm
2*15W	2*350mA	25°	2700K	2290.5lm
			3000K	2395.5lm
			4000K	2616.5lm
2*15W	2*350mA	35°	2700K	2478.6lm
			3000K	2583.6lm
			4000K	2804.6lm
2*15W	2*350mA	50°	2700K	2663.4lm
			3000K	2768.4lm
			4000K	2989.4lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	50°

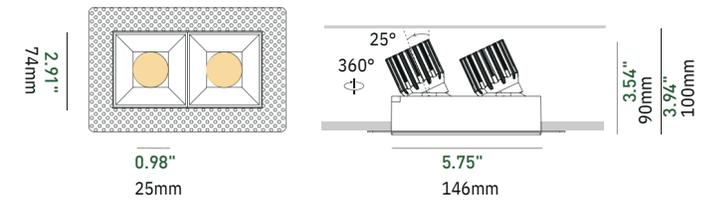


Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI



3" Quadruple Square With Trim



P.system	I (led)	Beam Angle	CCT	Lumens
4*15W	4*350mA	15°	2700K	3048.0lm
			3000K	3258.0lm
			4000K	3700.0lm
4*15W	4*350mA	25°	2700K	4581.0lm
			3000K	4791.0lm
			4000K	5233.0lm
4*15W	4*350mA	35°	2700K	4957.2lm
			3000K	5167.2lm
			4000K	5609.2lm
4*15W	4*350mA	50°	2700K	5326.8lm
			3000K	5536.8lm
			4000K	5978.8lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	50°

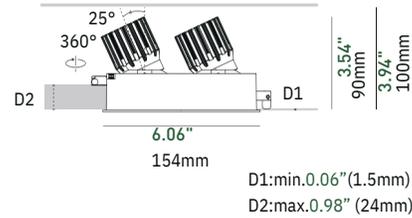


With Trim



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI



3" Quadruple Square Trimless



P.system	I (led)	Beam Angle	CCT	Lumens
4*15W	4*350mA	15°	2700K	3048.0lm
			3000K	3258.0lm
			4000K	3700.0lm
4*15W	4*350mA	25°	2700K	4581.0lm
			3000K	4791.0lm
			4000K	5233.0lm
4*15W	4*350mA	35°	2700K	4957.2lm
			3000K	5167.2lm
			4000K	5609.2lm
4*15W	4*350mA	50°	2700K	5326.8lm
			3000K	5536.8lm
			4000K	5978.8lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	50°

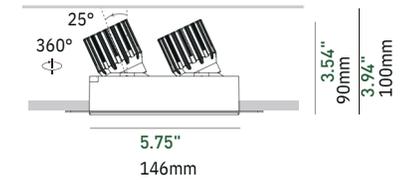


Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


3" Fixed Square With Trim IP44



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0lm
			3000K	814.5lm
			4000K	925.0lm
15W	350mA	25°	2700K	995.3lm
			3000K	1047.8lm
			4000K	1158.3lm
15W	350mA	35°	2700K	1089.3lm
			3000K	1141.8lm
			4000K	1252.3lm
15W	350mA	50°	2700K	1181.7lm
			3000K	1234.2lm
			4000K	1344.7lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	16	35°

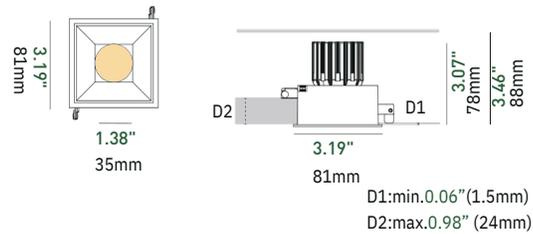


With Trim



Driver Voltage AC100-120V Driver Options ON/OFF DIM TRIAC DIM 0/1-10V DIM DALI


3" Fixed Square Trimless IP44



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0lm
			3000K	814.5lm
			4000K	925.0lm
15W	350mA	25°	2700K	995.3lm
			3000K	1047.8lm
			4000K	1158.3lm
15W	350mA	35°	2700K	1089.3lm
			3000K	1141.8lm
			4000K	1252.3lm
15W	350mA	50°	2700K	1181.7lm
			3000K	1234.2lm
			4000K	1344.7lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	16	35°

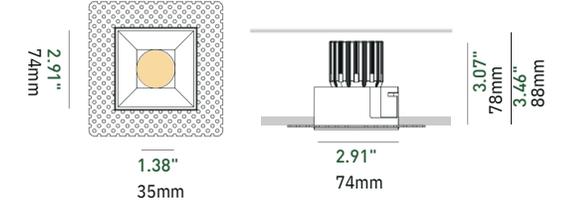


Trimless



Driver Voltage AC100-120V Driver Options ON/OFF DIM TRIAC DIM 0/1-10V DIM DALI


3" Fixed Double Square With Trim IP44



P.system	I (led)	Beam Angle	CCT	Lumens
2*15W	2*350mA	15°	2700K	1524.0lm
			3000K	1629.0lm
			4000K	1850.0lm
2*15W	2*350mA	25°	2700K	1990.5lm
			3000K	2095.5lm
			4000K	2316.5lm
2*15W	2*350mA	35°	2700K	2178.6lm
			3000K	2283.6lm
			4000K	2504.6lm
2*15W	2*350mA	50°	2700K	2363.4lm
			3000K	2468.4lm
			4000K	2689.4lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	16	35°

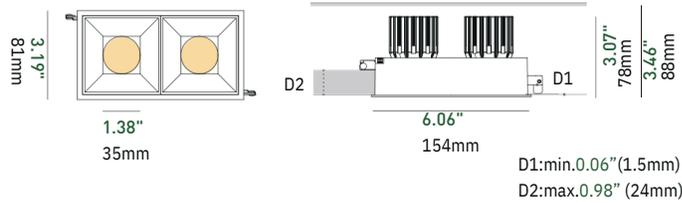


With Trim



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


3" Fixed Double Square Trimless IP44




P.system	I (led)	Beam Angle	CCT	Lumens
2*15W	2*350mA	15°	2700K	1524.0lm
			3000K	1629.0lm
			4000K	1850.0lm
2*15W	2*350mA	25°	2700K	1990.5lm
			3000K	2095.5lm
			4000K	2316.5lm
2*15W	2*350mA	35°	2700K	2178.6lm
			3000K	2283.6lm
			4000K	2504.6lm
2*15W	2*350mA	50°	2700K	2363.4lm
			3000K	2468.4lm
			4000K	2689.4lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	16	35°

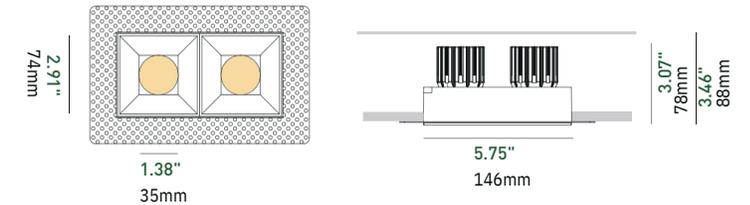


Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI



3" Fixed Quadruple Square With Trim IP44



P.system	I (led)	Beam Angle	CCT	Lumens
4*15W	4*350mA	15°	2700K	3048.0lm
			3000K	3258.0lm
			4000K	3700.0lm
4*15W	4*350mA	25°	2700K	3981.0lm
			3000K	4191.0lm
			4000K	4633.0lm
4*15W	4*350mA	35°	2700K	4357.2lm
			3000K	4567.2lm
			4000K	5009.2lm
4*15W	4*350mA	50°	2700K	4726.8lm
			3000K	4936.8lm
			4000K	5378.8lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	16	35°

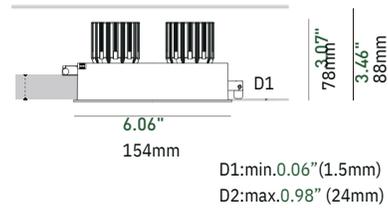


With Trim



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI



3" Fixed Quadruple Square Trimless IP44



P.system	I (led)	Beam Angle	CCT	Lumens
4*15W	4*350mA	15°	2700K	3048.0lm
			3000K	3258.0lm
			4000K	3700.0lm
4*15W	4*350mA	25°	2700K	3981.0lm
			3000K	4191.0lm
			4000K	4633.0lm
4*15W	4*350mA	35°	2700K	4357.2lm
			3000K	4567.2lm
			4000K	5009.2lm
4*15W	4*350mA	50°	2700K	4726.8lm
			3000K	4936.8lm
			4000K	5378.8lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	16	35°

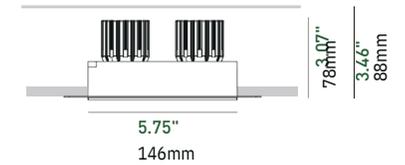


Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


3" Fixed Square Trimless IP65



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0lm
			3000K	814.5lm
			4000K	925.0lm
15W	350mA	25°	2700K	995.3lm
			3000K	1047.8lm
			4000K	1158.3lm
15W	350mA	35°	2700K	1089.3lm
			3000K	1141.8lm
			4000K	1252.3lm
15W	350mA	50°	2700K	1181.7lm
			3000K	1234.2lm
			4000K	1344.7lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	16	35°

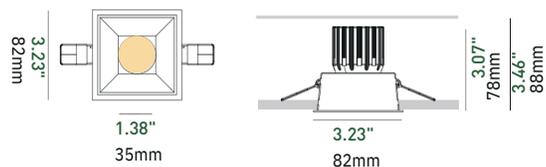

Color



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI




Drivers in Junction Box




Triac
8W/10W/12W/15W
For 1



1 1/4" (29mm)





Triac/0-10V/1-10V
Potentiometer/10V PWM 5 in
1 20W/40W/60W For 1-4

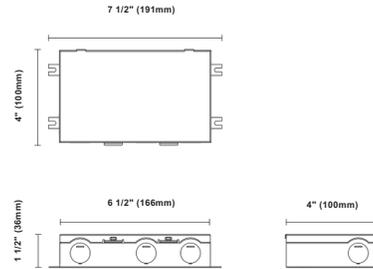


Brackets for New-Construction (4-legs)





Cut out:
Round: Ø3" (Ø77mm)
Ø2" (Ø62mm)
Ø1" (Ø50mm)
Square: 3" (77mm)

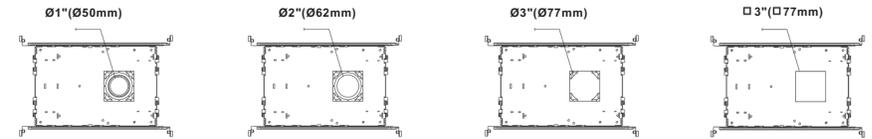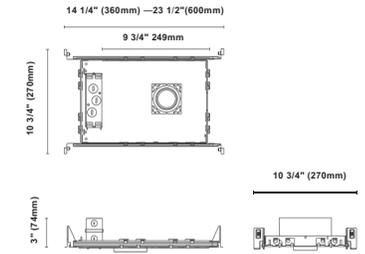


Brackets for New-Construction




Cut out:
Square: 3" * 6" (77mm * 150mm)

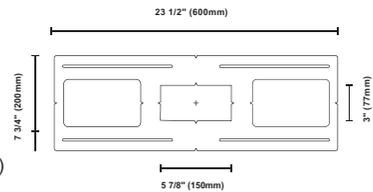



Cut out:
Round: Ø3" * 2 (Ø77mm)



IC-Box for New-Construction (4-legs)



Cut out:
Round: Ø3" (Ø77mm)
Ø2" (Ø62mm)
Ø1" (Ø50mm)
Square: 3" (77mm)


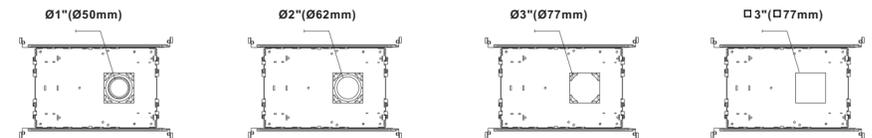
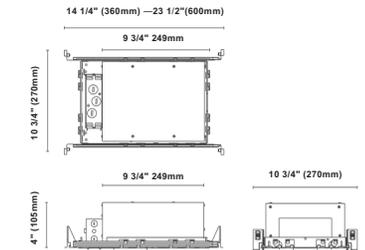


Remark




Tailored brackets are available with a reasonable surcharge, details as below,

- The customized brackets' dimensions are still the same as the existing ones, 600*200mm
 - Hole sizes can be customized within the range of 25-100mm
 - Holes quantity can be indicated, 1-7pcs
 - Holes' positions on the bracket can be done as requests
- For more information, please get in touch with sales.

NON-IC Wire Diagram

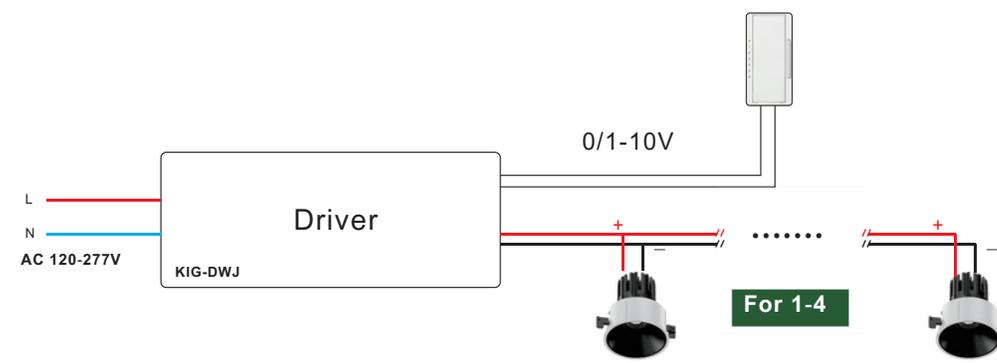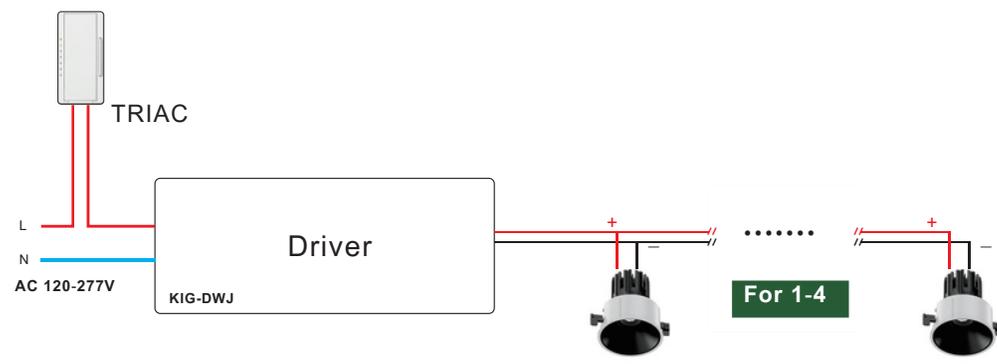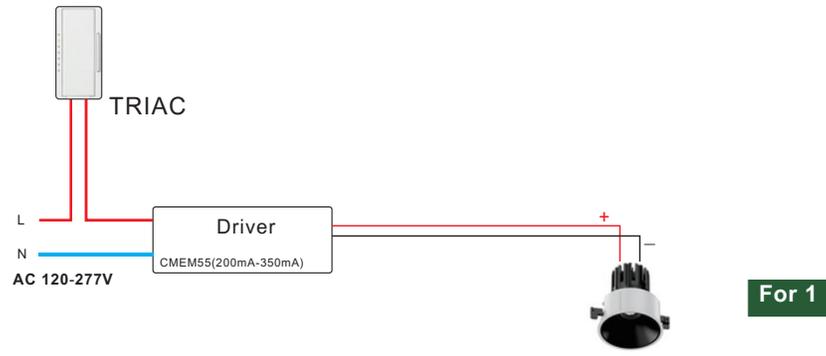

IC Rated Wire Diagram

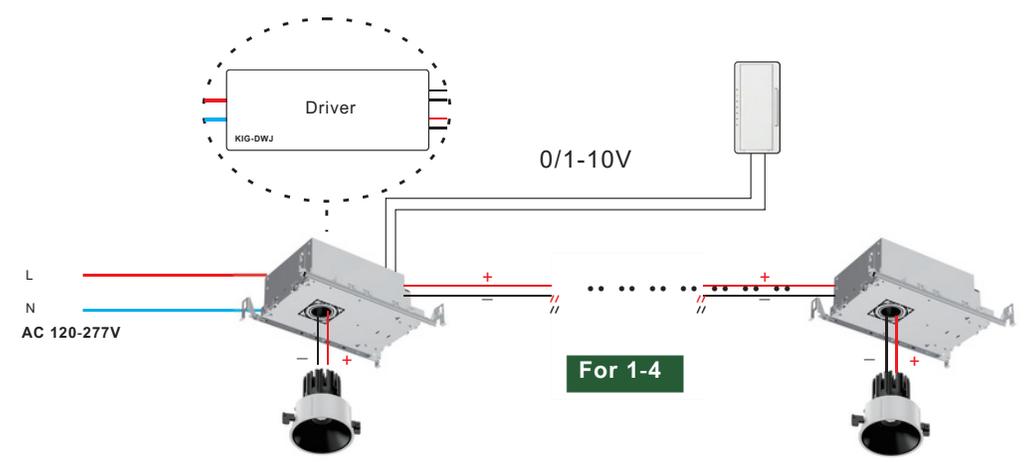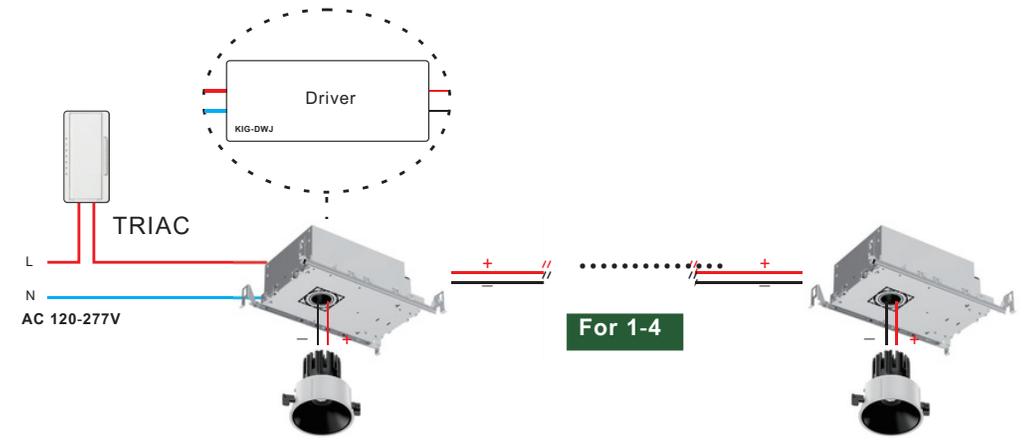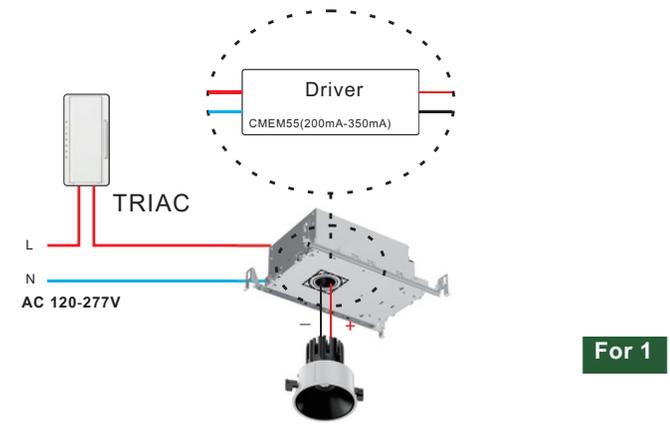


2" Round With Trim



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0 lm
			3000K	814.5 lm
			4000K	925.0 lm
15W	350mA	25°	2700K	1145.3 lm
			3000K	1197.8 lm
			4000K	1308.3 lm
15W	350mA	35°	2700K	1239.3 lm
			3000K	1291.8 lm
			4000K	1402.3 lm
15W	350mA	50°	2700K	1331.7 lm
			3000K	1384.2 lm
			4000K	1494.7 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	50°



With Trim



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI




2" Round Trimless



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	15°	2700K	762.0 lm
			3000K	814.5 lm
			4000K	925.0 lm
15W	350mA	25°	2700K	1145.3 lm
			3000K	1197.8 lm
			4000K	1308.3 lm
15W	350mA	35°	2700K	1239.3 lm
			3000K	1291.8 lm
			4000K	1402.3 lm
15W	350mA	50°	2700K	1331.7 lm
			3000K	1384.2 lm
			4000K	1494.7 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	50°

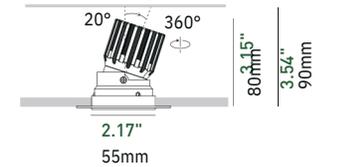

Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


2" Spotlight With Trim



P.system	I (led)	Beam Angle	CCT	Lumens
10W	250mA	15°	2700K	490.5 lm
			3000K	543.0 lm
			4000K	653.5 lm
10W	250mA	25°	2700K	746.0 lm
			3000K	798.5 lm
			4000K	909.0 lm
10W	250mA	35°	2700K	808.7 lm
			3000K	861.2 lm
			4000K	971.7 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	50°

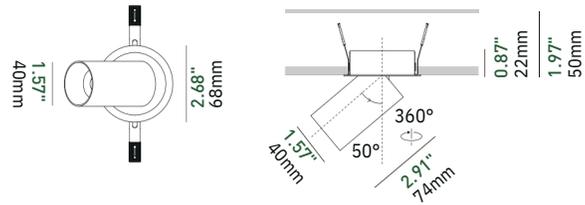

With Trim



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


2" Spotlight Trimless



P.system	I (led)	Beam Angle	CCT	Lumens
10W	250mA	15°	2700K	490.5 lm
			3000K	543.0 lm
			4000K	653.5 lm
10W	250mA	25°	2700K	746.0 lm
			3000K	798.5 lm
			4000K	909.0 lm
10W	250mA	35°	2700K	808.7 lm
			3000K	861.2 lm
			4000K	971.7 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	50°

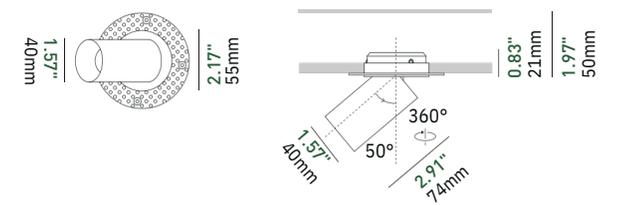

Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


2" Round Wall Washer

2" Wall washer

Dia 2", strong cold-forged pure Alu. engine improves the Dlvd lumens up to 1344.7lm





Wall Washer

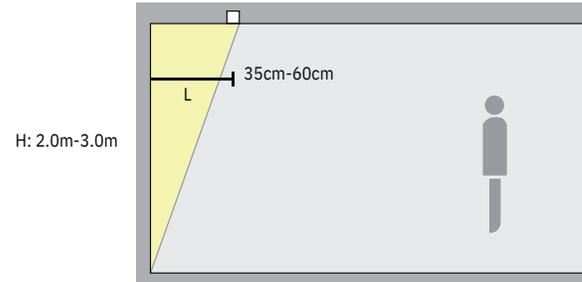

With Trim




Trimless

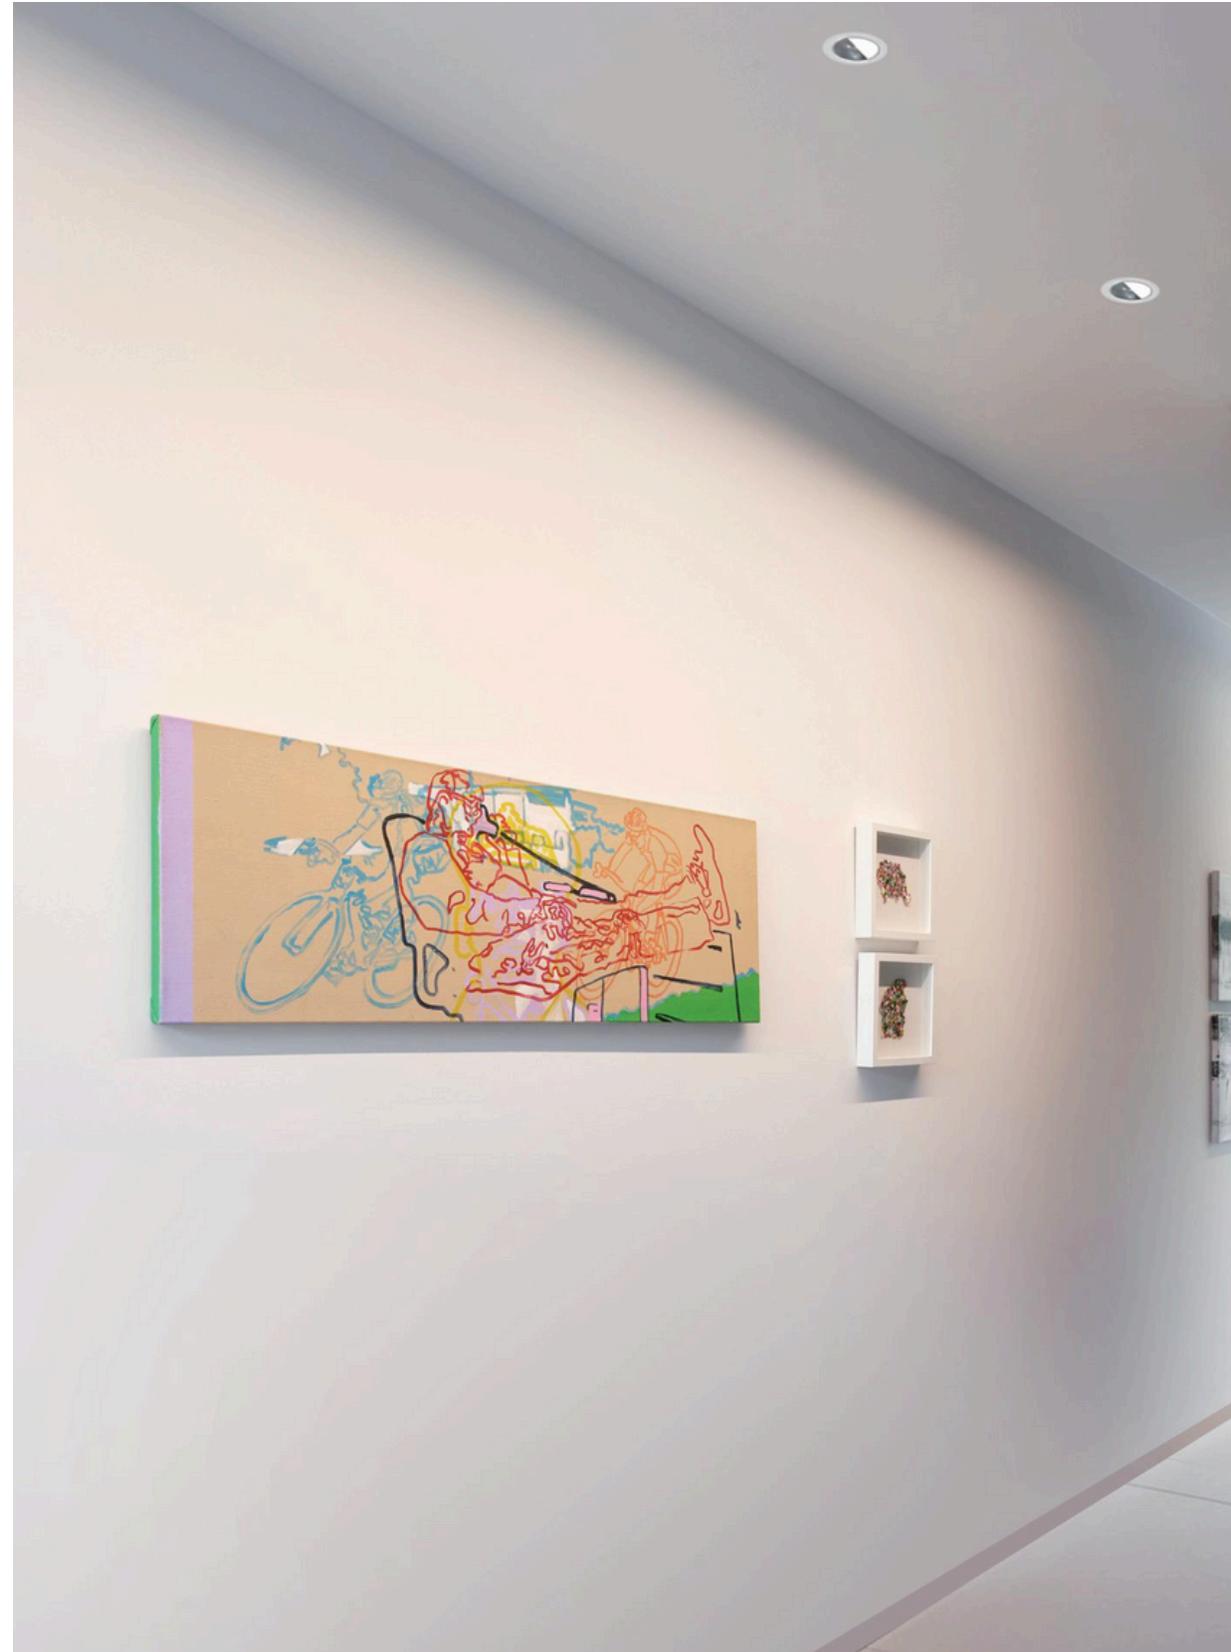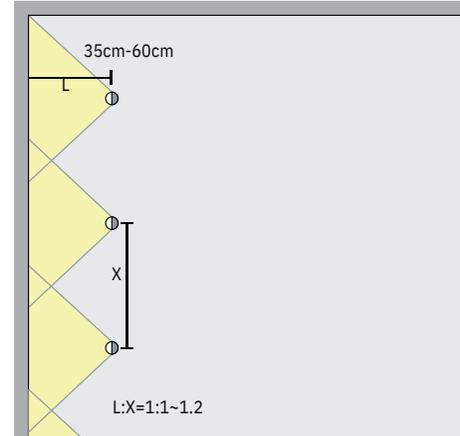


2" Round Wall Washer With Trim



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	wall washer	2700K	1181.7 lm
			3000K	1234.2 lm
			4000K	1344.7 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	/	/

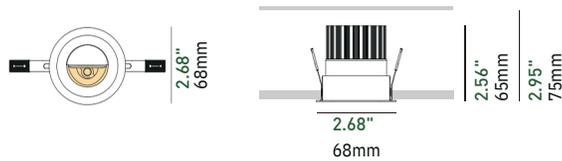

With Trim



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


2" Round Wall Washer Trimless



P.system	I (led)	Beam Angle	CCT	Lumens
15W	350mA	wall washer	2700K	1181.7 lm
			3000K	1234.2 lm
			4000K	1344.7 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	/	/

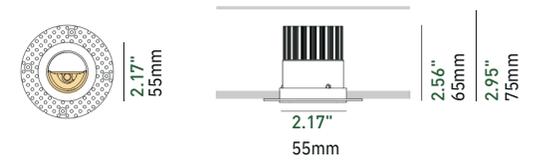


Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI



1.65"
42mm



0.71"
18mm





1" Round With Trim



P.system	I (led)	Beam Angle	CCT	Lumens
10W	250mA	15°	2700K 3000K 4000K	490.5 lm 543.0 lm 613.2 lm
		25°	2700K 3000K 4000K	746.0 lm 798.5 lm 868.7 lm
		35°	2700K 3000K 4000K	808.7 lm 861.2 lm 931.4 lm
10W	250mA	50°	2700K 3000K 4000K	870.3 lm 922.8 lm 993.0 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	52°



With Trim



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


1" Round With Trim



P.system	I (led)	Beam Angle	CCT	Lumens
10W	250mA	15°	2700K 3000K 4000K	490.5 lm 543.0 lm 613.2 lm
		25°	2700K 3000K 4000K	746.0 lm 798.5 lm 868.7 lm
		35°	2700K 3000K 4000K	808.7 lm 861.2 lm 931.4 lm
10W	250mA	50°	2700K 3000K 4000K	870.3 lm 922.8 lm 993.0 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	52°



Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


1" Round Fixed With Trim IP44



P.system	I (led)	Beam Angle	CCT	Lumens
10W	250mA	15°	2700K 3000K 4000K	490.5 lm 543.0 lm 613.2 lm
10W	250mA	25°	2700K 3000K 4000K	746.0 lm 798.5 lm 868.7 lm
10W	250mA	35°	2700K 3000K 4000K	808.7 lm 861.2 lm 931.4 lm
10W	250mA	50°	2700K 3000K 4000K	870.3 lm 922.8 lm 993.0 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	52°



With Trim



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


1" Round Fixed Trimless IP44



P.system	I (led)	Beam Angle	CCT	Lumens
10W	250mA	15°	2700K 3000K 4000K	490.5 lm 543.0 lm 613.2 lm
10W	250mA	25°	2700K 3000K 4000K	746.0 lm 798.5 lm 868.7 lm
10W	250mA	35°	2700K 3000K 4000K	808.7 lm 861.2 lm 931.4 lm
10W	250mA	50°	2700K 3000K 4000K	870.3 lm 922.8 lm 993.0 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	13	52°



Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI



1" Round Pinhole With Trim




P.system	I (led)	Beam Angle	CCT	Lumens
10W	250mA	15°	2700K 3000K 4000K	304.5 lm 357.0 lm 427.2 lm
		25°	2700K 3000K 4000K	378.9 lm 431.4 lm 501.6 lm
		35°	2700K 3000K 4000K	527.1 lm 579.6 lm 649.8 lm
10W	250mA	50°	2700K 3000K 4000K	587.5 lm 640.0 lm 710.2 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	5	72°




With Trim



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


1" Round Pinhole Trimless



P.system	I (led)	Beam Angle	CCT	Lumens
10W	250mA	15°	2700K 3000K 4000K	304.5 lm 357.0 lm 427.2 lm
		25°	2700K 3000K 4000K	378.9 lm 431.4 lm 501.6 lm
		35°	2700K 3000K 4000K	527.1 lm 579.6 lm 649.8 lm
10W	250mA	50°	2700K 3000K 4000K	587.5 lm 640.0 lm 710.2 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	5	72°



Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

Mini Round



With Trim

Trimless



With Trim

Trimless

White



Black



Basic Information

Mounting	White Recessed
Trim Finishing Color	White
Reflector Color	White/Black
Material	Cold Forged Pure Alu. (Heat Sink)/Die-casting Alu.
Cutout Size	25mm / 29mm
IP Rating	IP20
Power	Max. 6W
Input Voltage	DC36V
Input Current	Max. 120mA

Optical Parameters

Light Source	LED COB
Lumens	45lm/W
CRI	90Ra
CCT	3000K ● 3500K ● 4000K ●
Beam Angle	15° 25° 20° x 50°
UGR	<10
LED Lifespan	50000hrs

Driver Voltage AC100-120V AC220-240V

Driver Options ON/OFF

Mini Spotlight



With Trim

Trimless

White



Black



Gold



MINI Family

Basic Information

Model	LN75-R26QS/T
Embedded Parts	With Trim/Trimless
Mounting	Recessed
Trim Finishing Color	White
Reflector Color	White/Black/Gold
Material	Pure aluminum
Cutout Size	25mm 29mm
Light Direction	90° 360°
IP Rating	IP20
Power	Max.8W
Input Voltage	DC36V
Input Current	Max. 200mA

Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra/90Ra
CCT	3000K 3500K 4000K
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	15° 25° 35°
UGR	<9
LED Lifespan	50000hrs
Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI