


Out series



IP20

TECHNICAL DRAWINGS

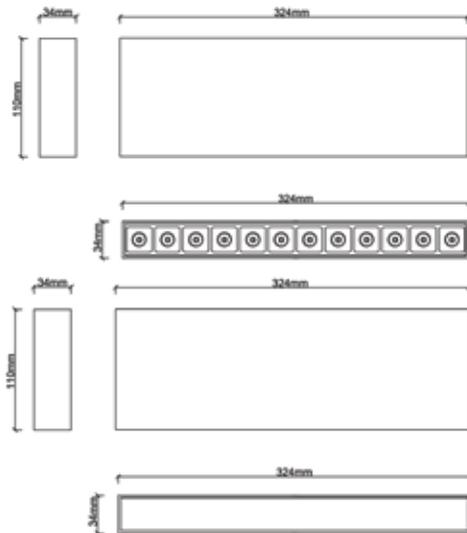

DESIGN BY

NUORDIC

DESCRIPTION

Unexpected come OUT style with pleasantly surprise in a swift glance
 The best present for the concept of invisible lighting.
 Comfortable lighting without glare
 Minimal glare and multiple light beams
 Elegant body coating and antiglare cover
 External dimming interface with Triac,0/1-10V,Dali

FEATURES

Article Code: Out series
 Colour: Black/White
 Installation: Magnetic
 Environment: Indoor

General Specification

Beam angle: 12/34/48°
 CCT: 2700K/3000K/4000K
 CRI: RA90
 LED: OSRAM DURIS
 DIM: Triac,0/1-10V,Dali

AVAILABLE MODELS

Item	Power(w)	Size(mm)	Luminous Flux(Lm)
Out12	16W	324*34*110	1435Lm
Out32	13W	324*34*110	895Lm
Out12-DALI	12W	324*34*110	1435Lm
Out32-DALI	13W	324*34*110	895Lm

PACKAGE INFORMATION

Item	Qty/Ctn(pcs)	N.W/Ctn(kgs)	G.W/Ctn(kgs)	L*W*H(cm)
Out12	10	7.1	11.2	45*38.5*30
Out32	10	7.1	11.2	45*38.5*30

LIGHT DISTRIBUTION

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

