


Out series



IP20

TECHNICAL DRAWINGS

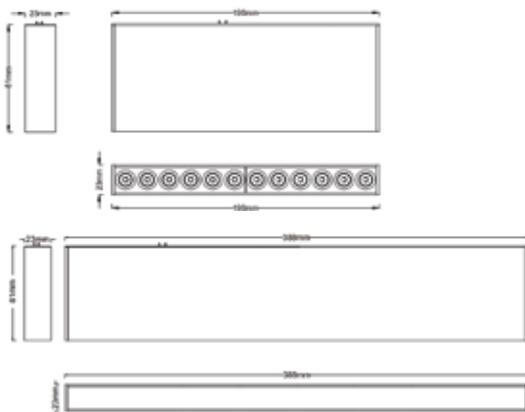

DESIGN BY

NUORDIC

DESCRIPTION

Unexpected come OUT style with pleasantly surprise in a swift glance
 The best present for the concept of invisible lighting.
 Comfortable lighting without glare
 Minimal glare and multiple light beams
 Elegant body coating and antiglare cover
 External dimming interface with Triac,0/1-10V,Dali

FEATURES

Article Code: Out series
 Colour: Black/White
 Installation: Magnetic
 Environment: Indoor

General Specification

CCT: 2700K/3000K/4000K
 CRI: RA90
 LED: OSRAM DURIS
 DIM: Triac,0/1-10V,Dali

AVAILABLE MODELS



Item	Power(w)	Size(mm)	Beam angle	Luminious Flux(Lm)
Out12-s	12W	196*23*81	20/34/48D	1015Lm
Out40-s	15W	388*23*81	Diffuse	1015Lm

PACKAGE INFORMATION

Item	Qty/Ctn(pcs)	N.W/Ctn(kgs)	G.W/Ctn(kgs)	L*W*H(cm)
Out12-s	40	12.4	16.3	62*26*40.5
Out40-s	20	10.3	13.8	50.5*45*26

LIGHT DISTRIBUTION

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

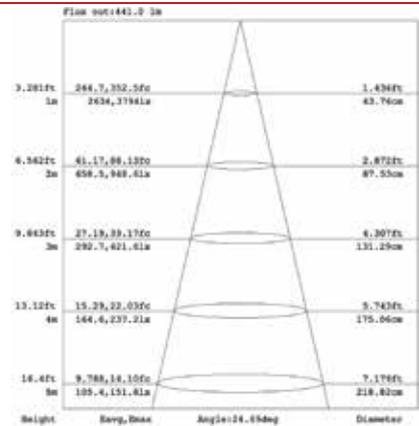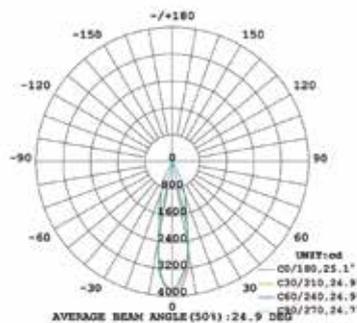

We reserve the right to change the product specifications.