

Pendant series Cylinder




DESIGN BY
NUORDIC

DESCRIPTION

Thanks to the length adjustable cable, the magnetic pendant works smooth in different spaces. Not only for decoration, it's professional in atmosphere creation by precious light control. Comfortable lighting without glare
Minimal glare and multiple light beams
Elegant body coating and antiglare cover
External dimming interface with Triac, 0/1-10V, Dali

TECHNICAL DRAWINGS

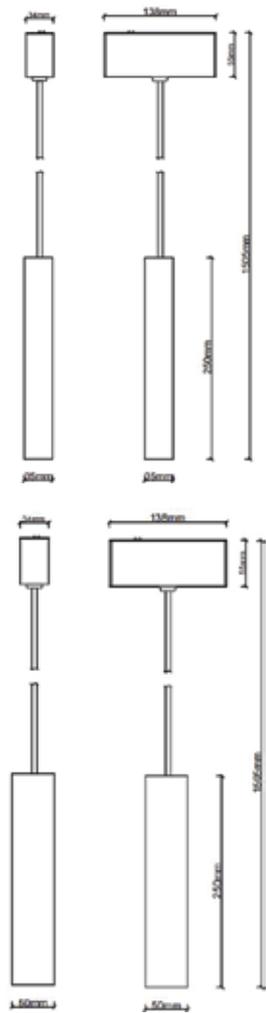

FEATURES

Article Code: Pendant series
Colour: Black/White
Installation: Magnetic
Environment: Indoor

General Specification

CCT: 2700K/3000K/4000K
CRI: RA90
LED: Cree
DIM: Triac, 0/1-10V, Dali

AVAILABLE MODELS



Item	Power(w)	Size(mm)	Beam angle	Luminous Flux(Lm)
Pendant35-R	5W	Ø35*250	20/30/40D	530Lm
Pendant50-R	10W	Ø50*250	18/24/36D	685Lm
Pendant35-R-DALI	5W	Ø35*250	20/30/40D	530Lm
Pendant50-R-DALI	10W	Ø50*250	18/24/36D	685Lm

PACKAGE INFORMATION

Item	Qty/Ctn(pcs)	N.W/Ctn(kgs)	G.W/Ctn(kgs)	L*W*H(cm)
Pendant35-R	12	7.4	9.7	56*32*35.5
Pendant50-R	12	6.6	9.3	56*32*35.5

LIGHT DISTRIBUTION

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

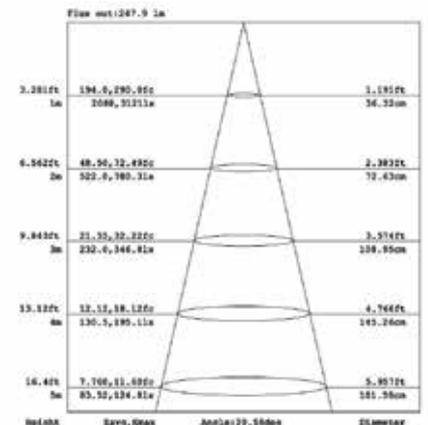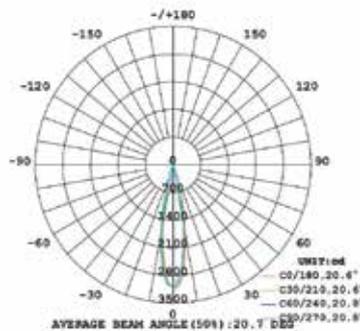

We reserve the right to change the product specifications.