


Spot series Square



IP20

TECHNICAL DRAWINGS

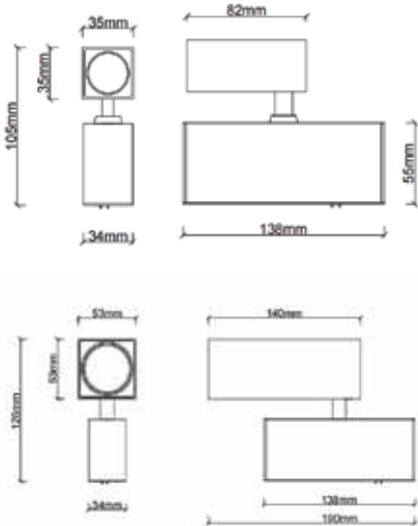

DESIGN BY

NUORDIC

DESCRIPTION

Three different beam angles each, obtained by means of refractive or hybrid optical units. Junction arm integrated in the spotlight's body to keep the barycentre aligned with the track and prevent any imbalance in possible suspension versions of track and prevent any imbalance in possible suspension versions of the track. The junction allows 360° rotation External dimming interface with Triac,0/1-10V,Dali

FEATURES

- Article Code: SPOT series Square
- Colour: Black/White
- Installation: Magnetic
- Environment: Indoor
- Filter: Honeycomb/Frosted/Stripy

GENERAL SPECIFICATION

- CCT: 2700K/3000K/4000K
- CRI: RA90
- LED: Cree
- DIM: Triac,0/1-10V,Dali

AVAILABLE MODELS

Item	Power(w)	Size(mm)	Beam angle	Luminous Flux(Lm)
Spot35-SQ	8W	35*35*82	15D	365Lm
Spot50-SQ	10W	53*53*140	18/24/36D	725Lm
Spot35-SQ-DAL8W	8W	35*35*82	15D	365Lm
Spot50-SQ-DAL10W	10W	53*53*140	18/24/36D	725Lm

PACKAGE INFORMATION

Item	Qty/Ctn(pcs)	N.W/Ctn(kgs)	G.W/Ctn(kgs)	L*W*H(cm)
Spot35-SQ	20			39.5*34*40.5
Spot50-SQ	20	9	11.5	50*52*23

LIGHT DISTRIBUTION

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

