



Spot series Round

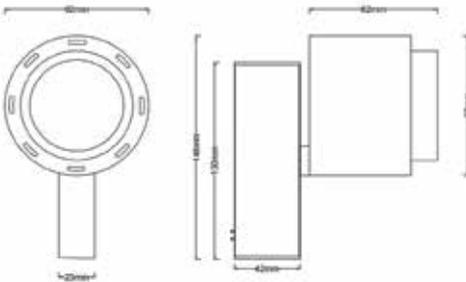

IP20

TECHNICAL DRAWINGS

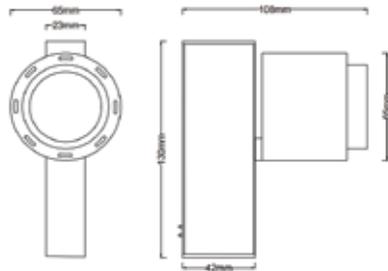

DESIGN BY

NUORDIC

DESCRIPTION

Two sizes with three different beam angles each, obtained by means of refractive or hybrid optical units. Junction arm integrated in the spotlight's body to keep the barycentre aligned with the track and prevent any imbalance in possible suspension versions of track and prevent any imbalance in possible suspension versions of the track. The junction allows 360° rotation
External dimming interface with Triac,0/1-10V,Dali

FEATURES

- Article Code: SPOT series Round
- Colour: Black/White
- Installation: Magnetic
- Environment: Indoor
- Filter: Honeycomb/Frosted/Stripy

GENERAL SPECIFICATION

- CCT: 2700K/3000K/4000K
- CRI: RA90
- LED: Cree
- DIM: Triac,0/1-10V,Dali

AVAILABLE MODELS

Item	Power(w)	Size(mm)	Beam angle	Luminous Flux(Lm)
Spot65-R-s	8W	∅65*63	10/20/30D	255Lm
Spot92-R-s	15W	∅92*82	10/20/30D	485Lm
Spot65-R-s-DALI	8W	∅65*63	10/20/30D	255Lm
Spot92-R-s-DALI	15W	∅92*82	10/20/30D	485Lm

PACKAGE INFORMATION

Item	Qty/Ctn(pcs)	N.W/Ctn(kgs)	G.W/Ctn(kgs)	L*W*H(cm)
Spot65-R-s	18	5.8	9.2	51.5*41*32
Spot92-R-s	16	8.6	12.3	42*38*53

LIGHT DISTRIBUTION

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

