


Basic Information

Mounting	Semi-recessed		
Power	Max. 15W		
CCT	3000K	3500K	4000K
Beam Angle	15°	25°	35°
UGR	< 13		
IP Rating	IP20		
Lumens	65lm/W 90lm/W		
CRI	97Ra /90Ra		

Driver Voltage AC100-120V AC220-240V

Driver Options ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V

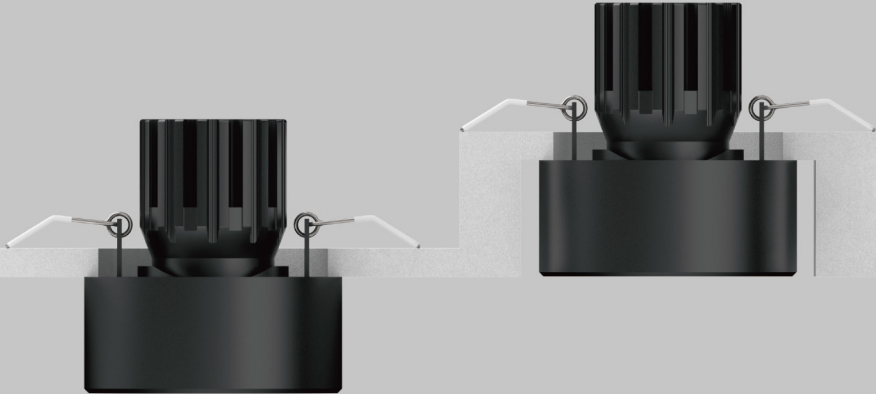