




## ARC 2.75"


The series features unique dual-level control, allowing users to select from a diverse range of independently controllable direct and indirect light distributions, creating light both visually pleasing and comfortable.

It fits multiple ceiling types, including suspended, recessed, wall, and surface. Available in lengths of 2', 3', 4', 6', 8', and continuous runs. Perfect for commercial open offices, private offices, conference rooms, corridors, educational facilities, and more.

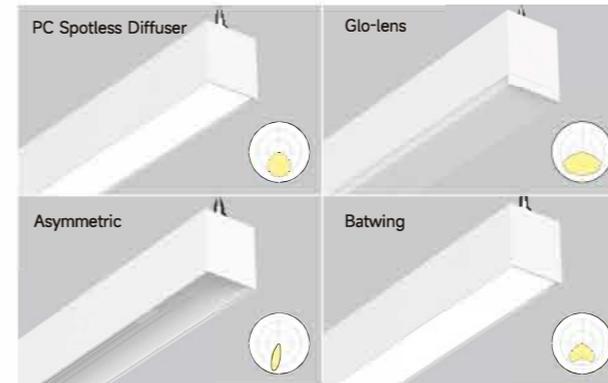


### Optical Lens

Seamlessly integrate ARC linear with a variety of lens options to create a lighting solution tailored to your vision.

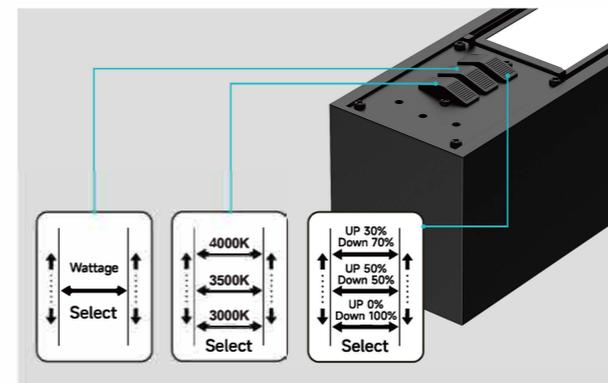

### CCT & Wattage Switch

Allows the end user to select between wattage and CCT (3000K, 3500K or 4000K) at the time of installation with a 3 position switch.

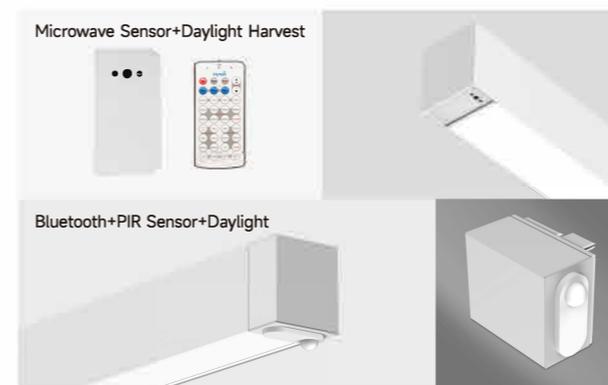


### Sensor Controls

Bluetooth mesh control for Smart Loop system for easy and precise adjustment

### Create Any Shape As You Want

Wide range of link accessories L, X, T and Y shape for you to craft distinctive, personalized styles that perfectly complement your space

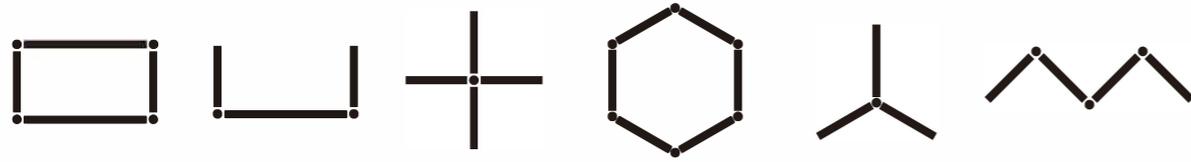

#### Lit-Pattern Connectors



L-Shape



T-Shape



X-Shape



120° L-Shape




Y-Shape


#### Non Lit-Pattern Connectors




2 Head x 60°




3 Head x 60°



4 Head x 60°




5 Head x 60°




6 Head x 60°




L-Shape



T-Shape



X-Shape




Z-Shape

360° Rotable





## ARC 2.75"

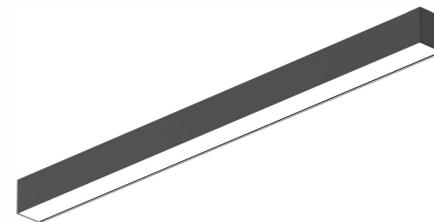

### MAIN FEATURES

- Sleek architectural design and quality.
- 2.75" linear aperture.
- Available in 2', 3', 4', 6', 8' lengths for individual or continuous runs.
- High light efficacy 115-130lm/w.
- Multiple installation types including suspended, recessed, surface, and wall.
- CCT Switchable from 3000K, 3500K, 4000K.
- Up and down lighting with flexible intensity adjustment.
- Highly customizable with X, Y, T etc Joints.
- Integrated sensor system for smart control.
- Emergency battery backup available.
- Easy replacement and maintenance with removable accessories.

<p><b>Input Wattage</b> 20W 30W 40W 60W 80W 2FT 3FT 4FT 6FT 8FT</p>	<p><b>Delivered Lumens</b> 2300lm-9200lm</p>
<p><b>Input Voltage</b> 120V-347V input, 50-60Hz</p>	<p><b>Light Color</b> Static White: 3000K, 3500K, 4000K</p>
<p><b>Dimming Control</b> On-off, 0-10V, Triac, DALI</p>	<p><b>Color Quality</b> CRI 80+, SDCM≤5</p>
<p><b>Mounting Options</b></p> <p>  Surface                     Pendant                     Wall   Recessed                     T-bar             </p>	<p><b>Optics lens</b></p> <p>  PC Spotless Diffuser                     Glo-lens   Asymmetric                     Batwing             </p>
<p><b>Size</b> L: 2FT / 3FT / 4FT / 6FT / 8FT (606/906/1206/1806/2406mm) W: 2.75inch (70mm) H: 3.15inch (80mm)</p>	<p><b>Lighting Types</b></p> <p>  Downlight                     Up/Downlight             </p>
<p><b>Finishes</b></p> <p>  White                     Black                     Custom Color             </p>	<p><b>Optical Accessories</b></p> <p>  PC Louver                     Hex louver             </p>
<p><b>Warranty</b> 5 year limited warranty</p>	<p><b>Lumen Maintenance</b> 50000h@80%(L80)</p>