



Photometry

Beam angle: 25°
Delivered Lumens: 270 lumens
CCT: 4000K
CRI: 90
Power: 6W
Efficacy: 45lm/w

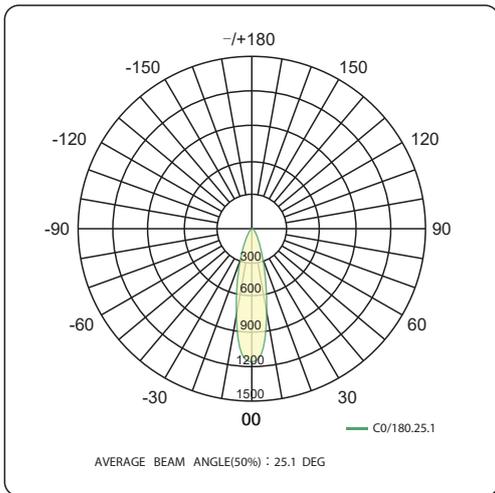

Beam angle: 15°
Delivered Lumens: 240 lumens
CCT: 4000K
CRI: 90
Power: 6W
Efficacy: 40lm/w

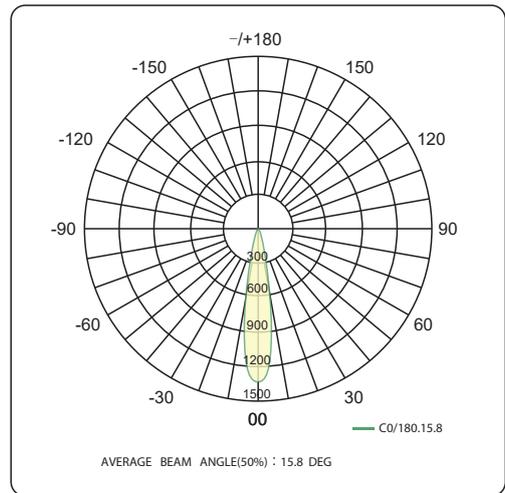


ACCESSORIES

Brackets for New-Construction



BRKT-R25

Cut out:
Round: $\varnothing 1"$ ($\varnothing 25\text{mm}$)

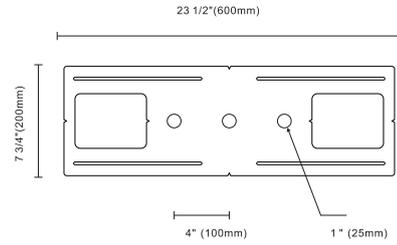


Brackets for New-Construction



BRKT-R29

Cut out:
Round: $\varnothing 1 \frac{1}{4}"$ ($\varnothing 29\text{mm}$)

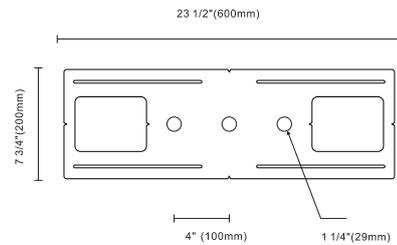

Remark



Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests




0.5" Round

N12-R25




N12-R25

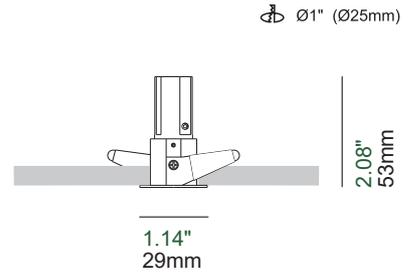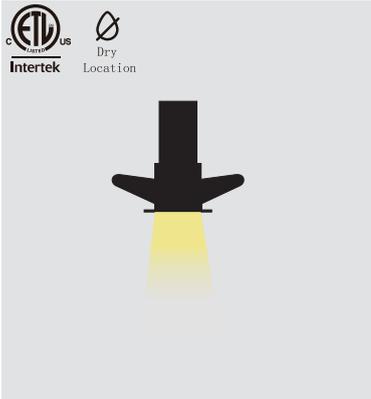

N12-R25

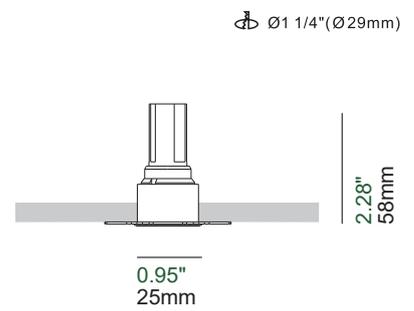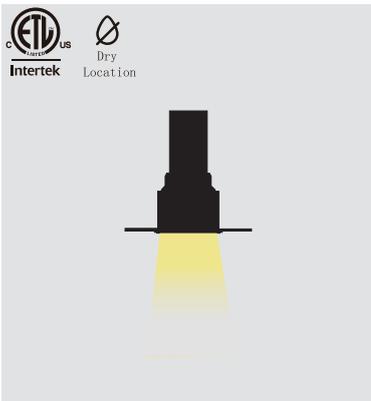

Microflange

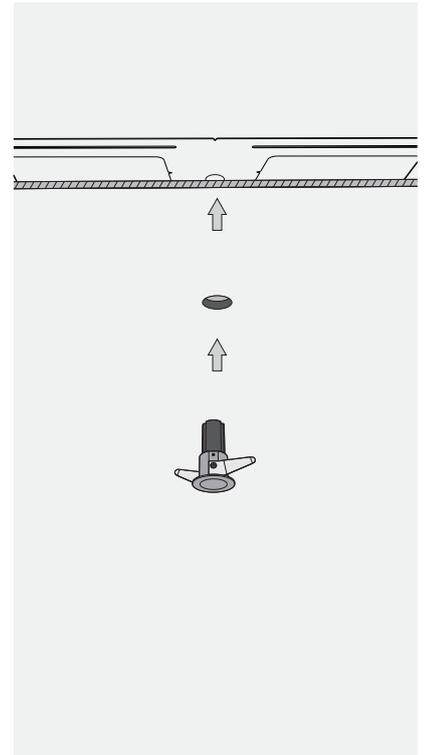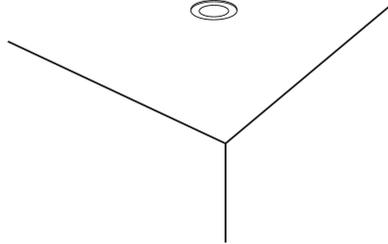

Trimless Drywall

