

PROJECT NAME: <div style="background-color: #004a99; height: 20px; width: 100%;"></div>	TYPE: <div style="background-color: #004a99; height: 20px; width: 100%;"></div>
--	--



3" Round IP44


N _____

3" Round IP44	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
N75	R Round	44	QS Microflange	B Black	B Black	B Bridgelux	90 90+ CRI 15 Watts Lumens Divd.-1335	27 2700K 30 3000K	50 50° 35 35°	CMEM55 On/Off; Triac PhaseDim; 120VAC	NCP-SR3-R21 Non-IC Bracket NCBX-SR3-R21 IC Box BRKT-2SR75A Non-IC Bracket for Dual Lights
			QT Trimless Drywall	W White	W White		97 97+ CRI 15 Watts Lumens Divd.-900	35 3500K 40 4000K	50 50° 35 35° 25 25°		
	S Square		KIG On/Off; Triac Phase Dim; 120/277VAC	G Gold	Dim To Warm		90 90+ CRI 15 Watts Lumens Divd.-900	1830 1800-3000K	50 50° 35 35°		
							90 90+ CRI 15 Watts Lumens Divd.-1050 <i>*External 5CCT Selector</i>	2765A 2700K 3000K 4000K 5000K 6500K	50 50° 35 35°		
			TUNABLE WHITE	90 90+ CRI 15 Watts Lumens Divd.-1050	2765 2700-6500K	25 25°	<i>*Dali 2ch Driver Remote Placed</i>	<i>*For more details,pls refer to page 3</i>			


N75-R44

Photometry


Beam angle: 50°
Delivered Lumens: 1335 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 89lm/W

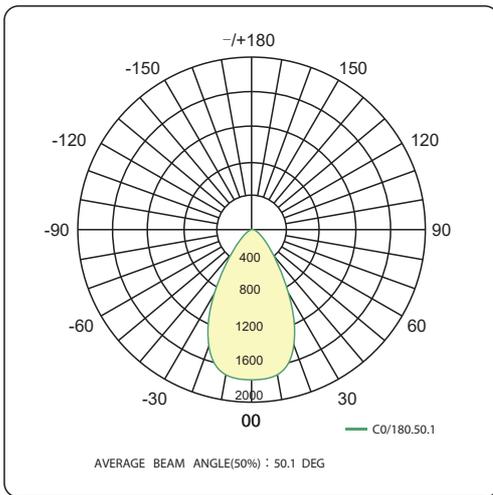

Beam angle: 35°
Delivered Lumens: 1230 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 82lm/W

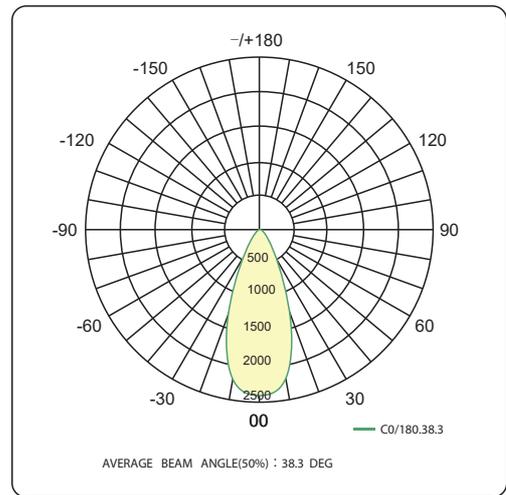

Beam angle: 25°
Delivered Lumens: 900 lumens
CCT: 4000K
CRI: 97
Power: 15W
Efficacy: 60lm/W

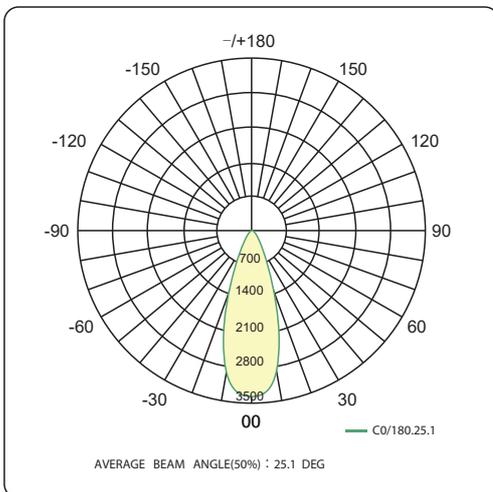


ACCESSORIES

Brackets for New-Construction (4-legs)



NCP-SR3-R21

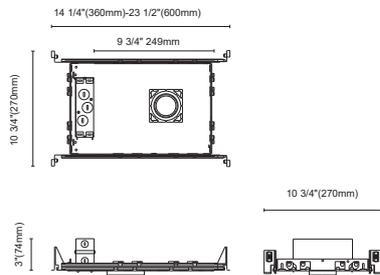

Cut out:


Round: Ø 3" (Ø 77mm)
 Ø 2" (Ø 62mm)
 Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

IC-BOX for New-Construction (4-legs)



NCBX-SR3-R21

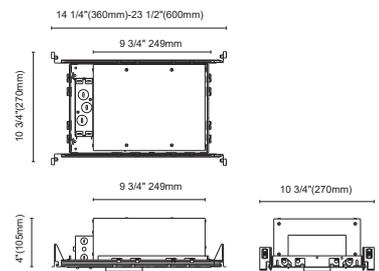


Cut out:


Round: Ø 3" (Ø 77mm)
 Ø 2" (Ø 62mm)
 Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

Cut out

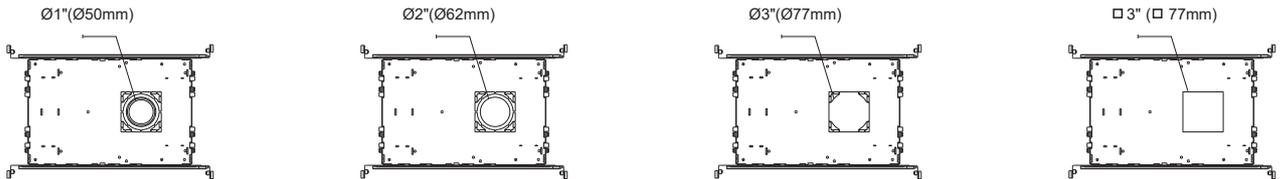

Brackets for New-Construction

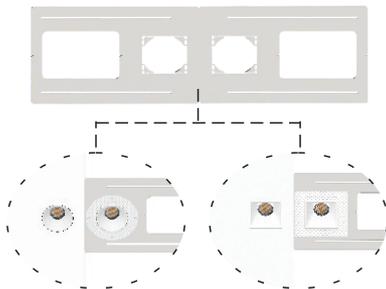


BRKT-2SR75A

Cut out:

Round: Ø 77mm*2 (Ø 77mm*2)

Square: □ 77mm*2 (□ 77mm*2)

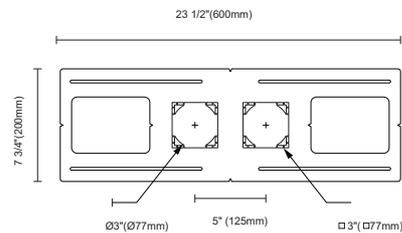

Remark



Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

3" Round IP44




N75-R44

N75-R44


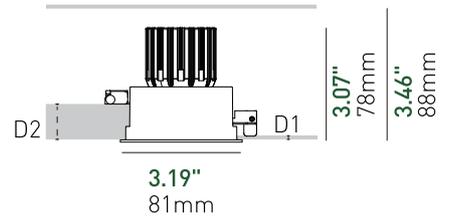
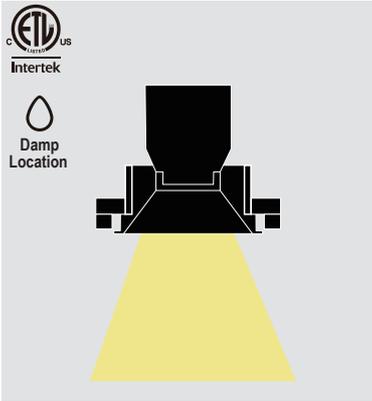


D1: min. **0.06"** (1.5mm)
D2: max. **0.94"** (24mm)

N75-R44

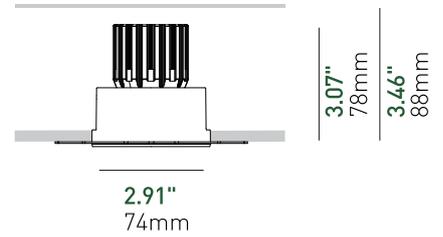

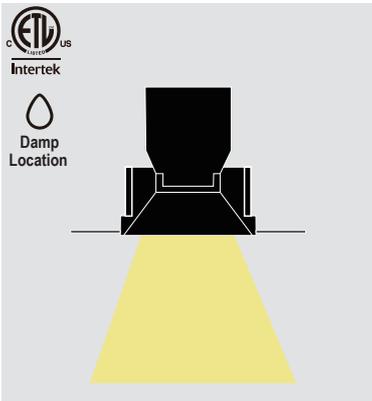


N75-R44

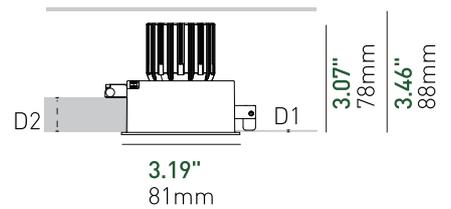

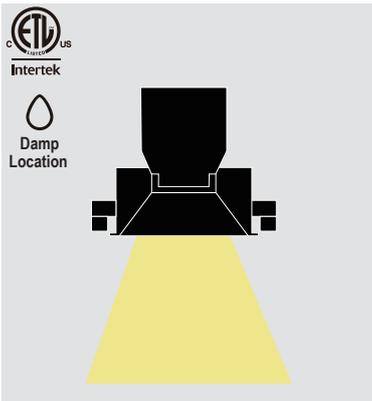


D1: min. **0.06"** (1.5mm)
D2: max. **0.94"** (24mm)

N75-R44

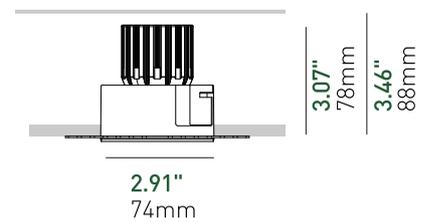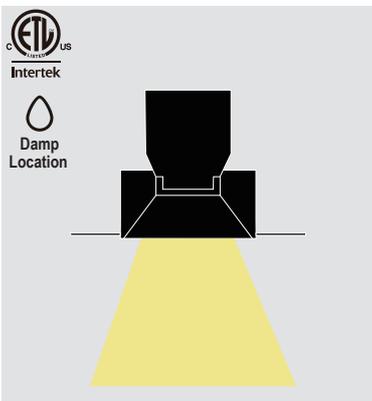

Microflange

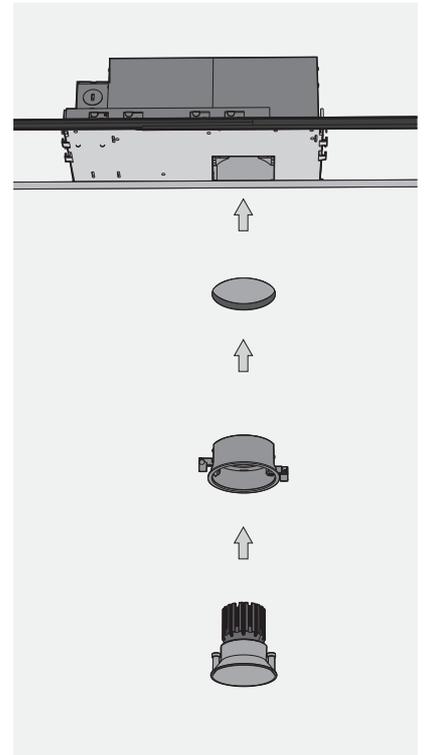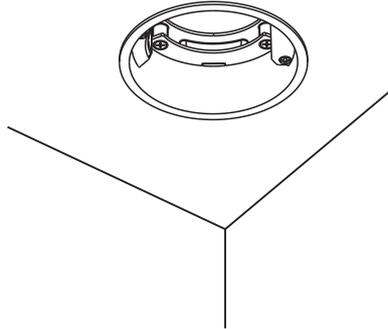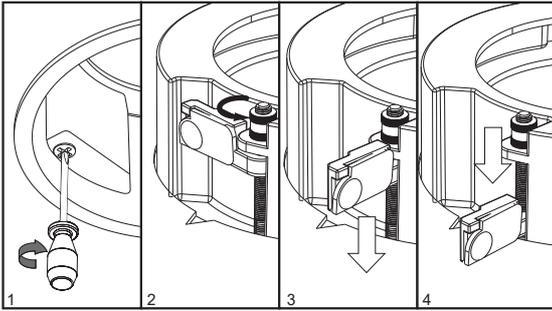

Trimless Drywall

