



Photometry

Beam angle: 25°
Delivered Lumens: 270 lumens
CCT: 4000K
CRI: 90
Power: 6W
Efficacy: 45lm/w

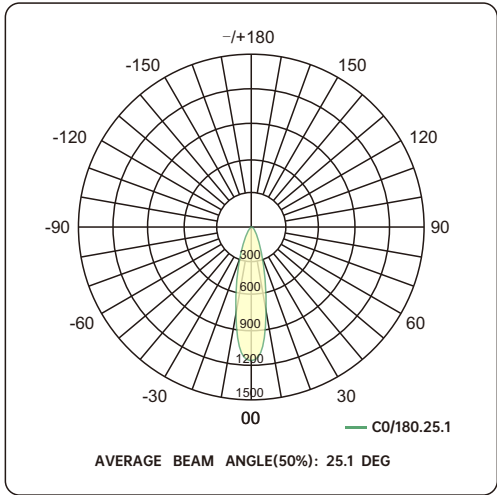

Beam angle: 15°
Delivered Lumens: 240 lumens
CCT: 4000K
CRI: 90
Power: 6W
Efficacy: 40lm/w

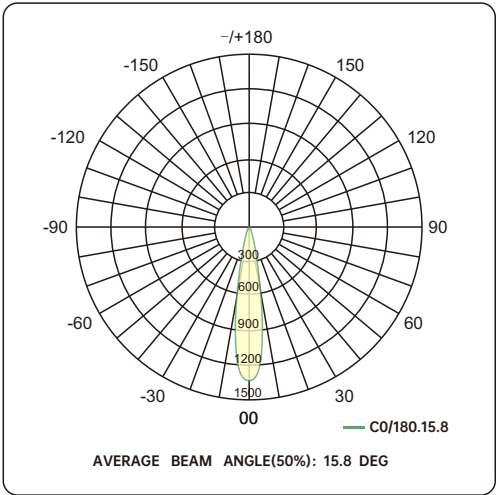


ACCESSORIES

Brackets for New-Construction



BRKT-R25

Cut out:
Round: Ø1" (Ø25mm)

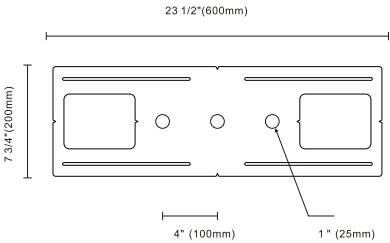


Brackets for New-Construction



BRKT-R29

Cut out:
Round: Ø1 1/4" (Ø29mm)

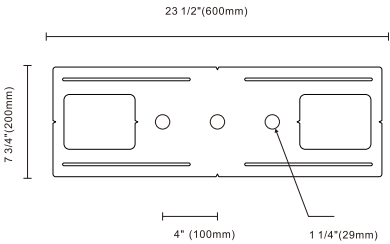


Remark

- Tailored brackets are available with a reasonable surcharge, details as below
- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
 - Hole sizes can be customized within the range of 25-100mm
 - Holes quantity can be indicated, 1-7pcs
 - Holes' positions on the bracket can be done as requests


N75-R25QS





Ø 1" (Ø25mm)

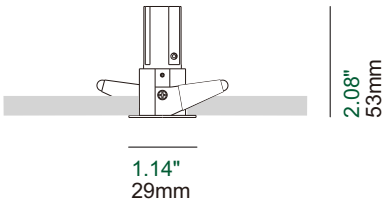




N75-R25QT

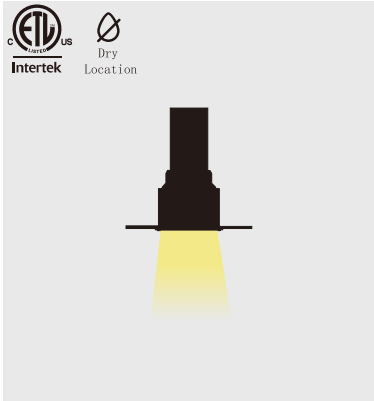

Ø 1 1/4" (Ø29mm)

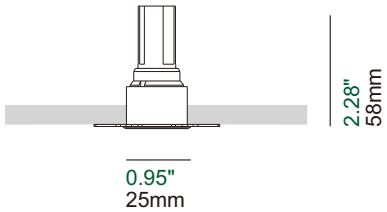

Microflange

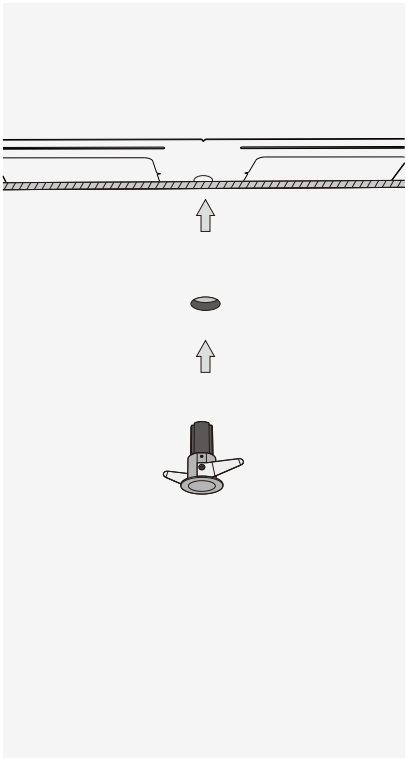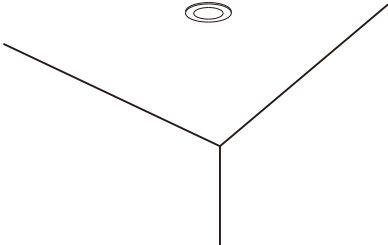

Trimless Drywall

