

PROJECT NAME:

TYPE:

N75-R31QT



N75-R31QT




Gypsum 2"

N75 - - - - -


MODEL	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
N75	R	31	QT Trimless Drywall	W White	B Black W White	B Bridgelux	90 90+ CRI 15 Watts Lumens Divd.-1485	27  2700K 30  3000K 35  3500K 40  4000K	50 50° 35 35°	CMEM55 On/Off; Triac PhaseDim; 0-10V Dim 120VAC KIG On/Off; Triac Phase Dim; 0-10V Dim 120/277VAC <i>*Remote Placed</i>	NCP-S100 Non-IC Bracket NCBX-S100 IC Box BRKT-S100 Non-IC Bracket for Dual Lights <i>*For more details,pls refer to page 3</i>
							97 97+ CRI 15 Watts Lumens Divd.-1050		50 50° 35 35° 25 25°		
							Dim To Warm		50 50°		
							90 90+ CRI 15 Watts Lumens Divd.-973	1830  1800-3000K	35 35°		
							90 90+ CRI 15 Watts Lumens Divd.-1150 <i>*External 5CCT Selector</i>	2765A  2700K 3000K 4000K 5000K 6500K	50 50° 35 35°		
							TUNABLE WHITE				
							90 90+ CRI 15 Watts Lumens Divd.-1150	2765  2700-6500K	25 25°	<i>*Dali 2ch Driver Remote Placed</i>	
N75-R31QT-W-W-B-90-35-50											

Photometry


Beam angle: 50°
Delivered Lumens: 1485 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 99lm/W

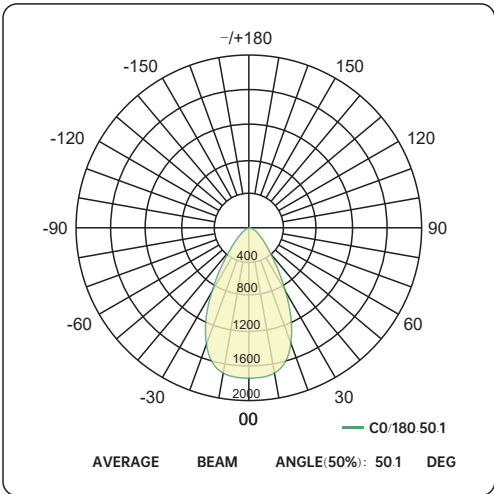

Beam angle: 35°
Delivered Lumens: 1380 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 92lm/W

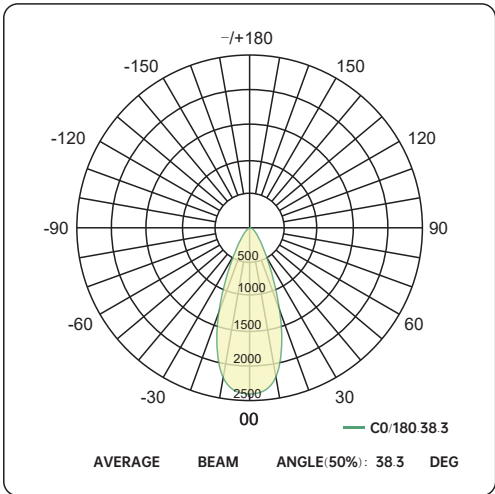


Beam angle: 25°
Delivered Lumens: 945 lumens
CCT: 4000K
CRI: 97
Power: 15W
Efficacy: 63lm/W

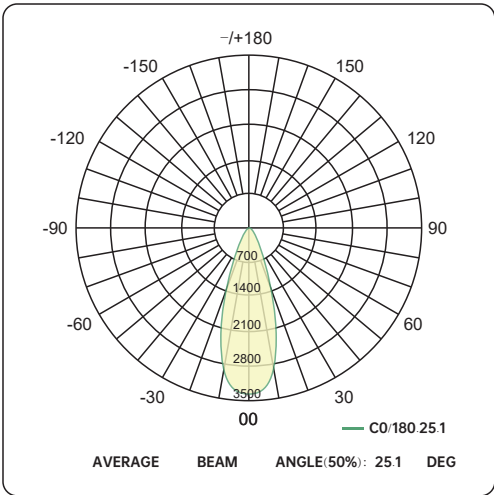

ACCESSORIES


Brackets for New-Construction (4-legs)

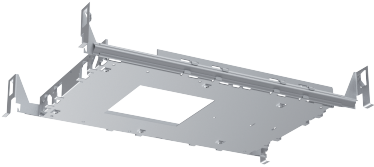


NCP-S100

Cut out:

Square: □ 4.02"×4.02" (□ 102*102mm)

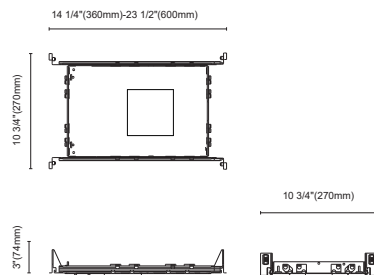


IC-BOX for New-Construction (4-legs)

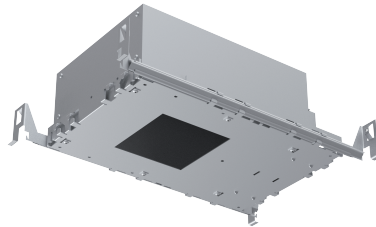

NCBX-S100


Cut out:

Square: □ 4.02"×4.02" (□ 102*102mm)

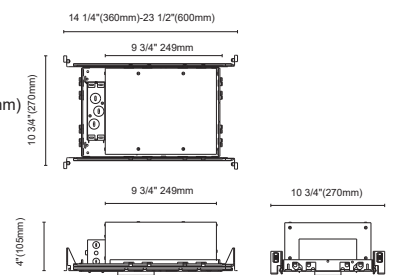

Cut out

□ 4.02"×4.02" (□ 102*102mm)




Rough-in Plate for New-Construction



BRKT-S100

Cut out:

Square: □ 4.02"×4.02" (□ 102*102mm)

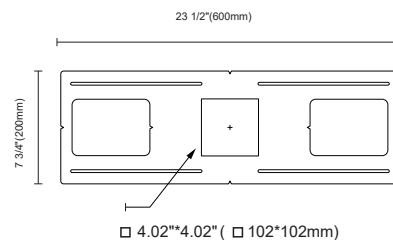




Remark

Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

For more information, please get in touch with sales.

N75-R31QT

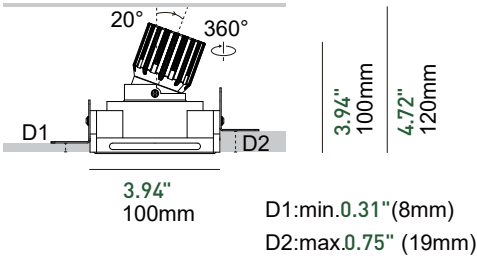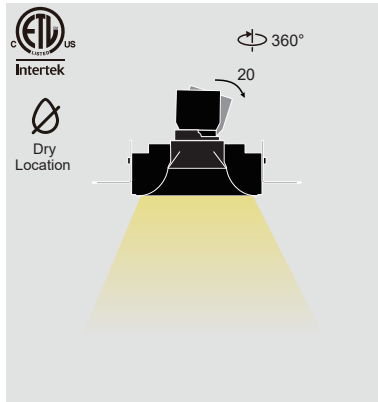

Trimless Drywall

