

PROJECT NAME:

TYPE:

3.5 Inch Recessed Round Fixed

N75-R40QS



N75-R40QS




N - - - - -


MODEL	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
N75	R Round	40	QS Microflange	B Black W White	B Black W White	B Bridgelux	90 90+ CRI 20 Watts Lumens Divd.-1640	27  2700K 30  3000K 35  3500K 40  4000K	50 50° 35 35° 25 25°	CMEM75 On/Off; Triac PhaseDim; 120VAC KIG On/Off; Triac Phase Dim; 120/277VAC *Remote Placed	NCP-SR3-R21 Non-IC Bracket NCBX-SR3-R21 IC Box BRKT-2SR75A Non-IC Bracket for Dual Lights *For more details,pls refer to page 3
							Dim To Warm 90 90+ CRI 20 Watts Lumens Divd.-1200	1830  1800-3000K	50 50° 35 35° 25 25°		
							90 90+ CRI 20 Watts Lumens Divd.-1558 *External 5CCT Selector	2765A  2700K  3000K  4000K  5000K  6500K	50 50° 35 35°		
							TUNABLE WHITE 90 90+ CRI 20 Watts Lumens Divd.-1558	2765  2700-6500K	25 25°		
N75-R40QS-W-W-B-90-35-35											

Photometry


Beam angle: 50°
Delivered Lumens: 1368 lumens
CCT: 4000K
CRI: 90
Power: 20W
Efficacy: 69lm/W

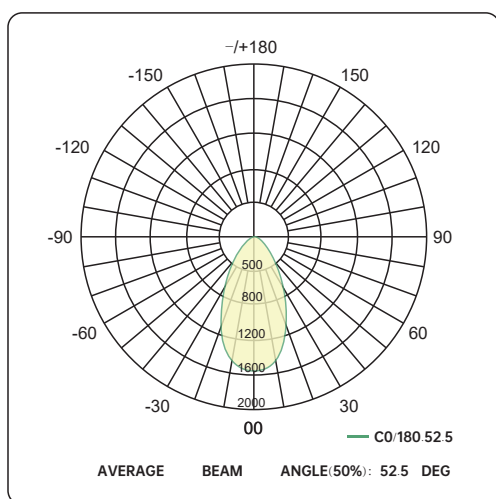

Beam angle: 35°
Delivered Lumens: 1537 lumens
CCT: 4000K
CRI: 90
Power: 20W
Efficacy: 77lm/W

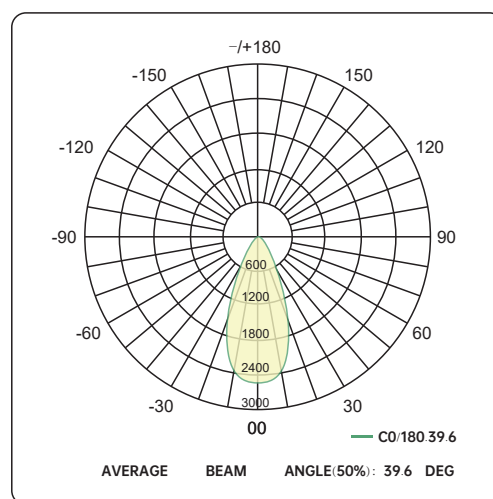


Beam angle: 25°
Delivered Lumens: 1640 lumens
CCT: 4000K
CRI: 90
Power: 20W
Efficacy: 82lm/W

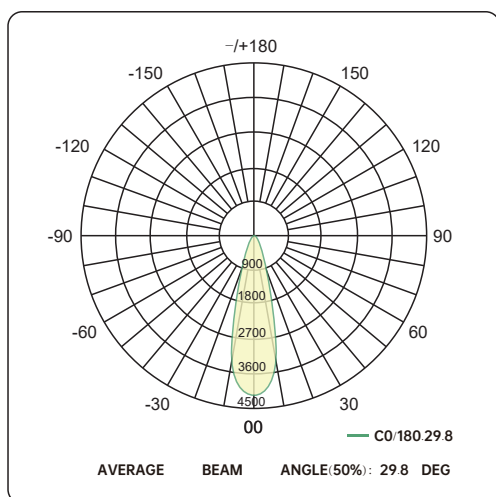

ACCESSORIES

Brackets for New-Construction (4-legs)

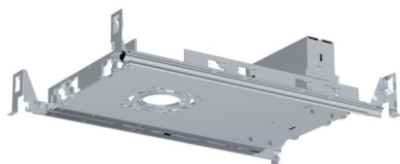


NCP-SR3-R21


Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

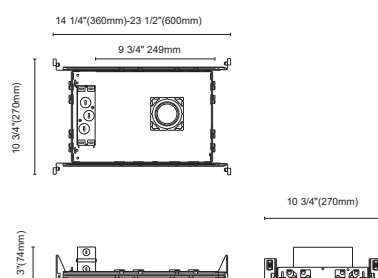

IC-BOX for New-Construction (4-legs)

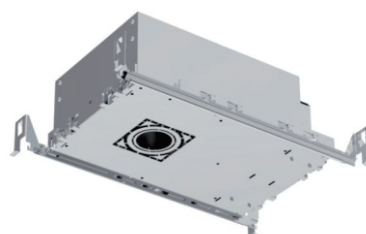


NCBX-SR3-R21





Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

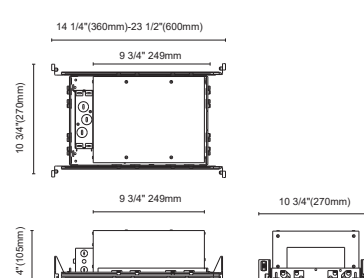

Cut out



Brackets for New-Construction




BRKT-2SR75A

Cut out:

Round: Ø 77mm*2 (Ø 77mm*2)

Square: □ 77mm*2 (□ 77mm*2)



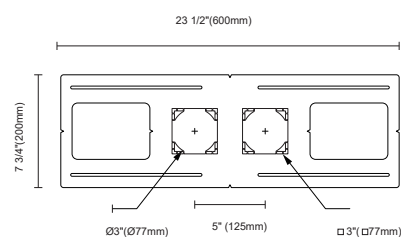


Remark

Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

For more information, please get in touch with sales.

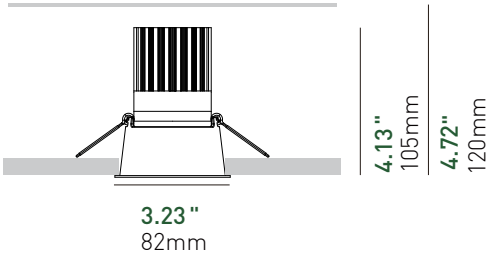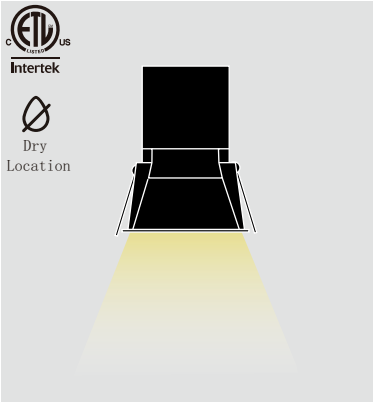

Microflange

