




PROFESSIONAL LED LIGHTING SOLUTIONS PROVIDER FOR
COMMERCIAL SITES, HOSPITALITY & RESIDENTIAL SPACES,
MUSEUMS & GALLERIES, AND OFFICES.



LINEAR LIGHT SYSTEM & CYLINDER
2025-2026 EDITION

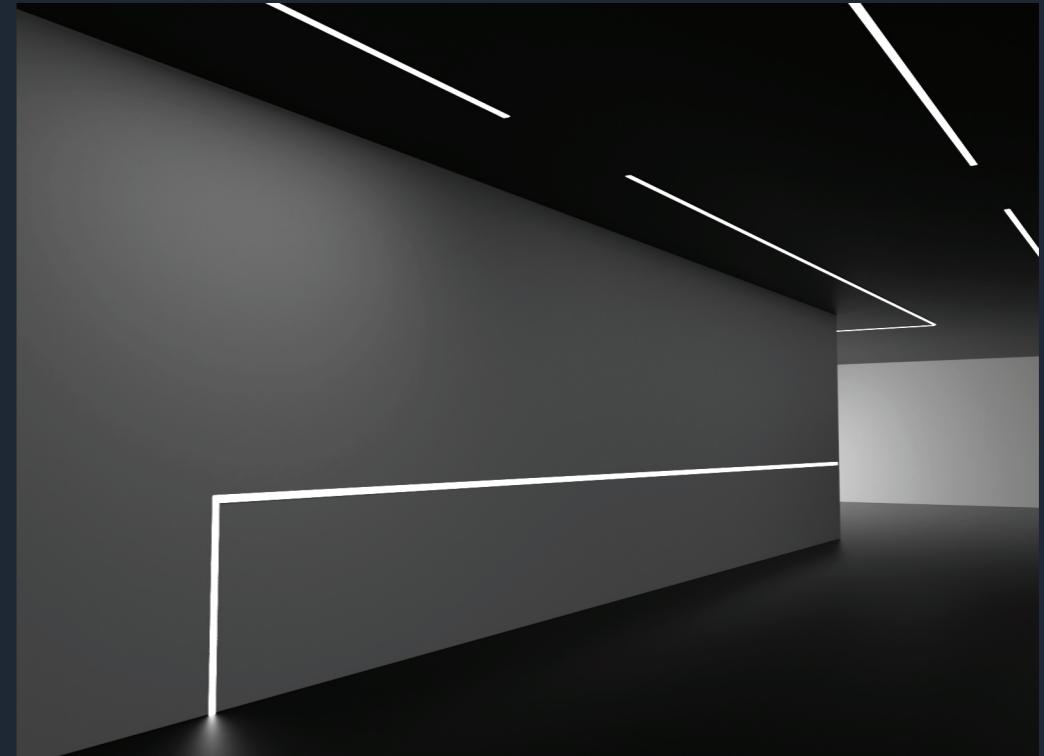

Welcome to Nuordic Lighting


Professional LED lighting Solutions Provider
For Commercial Sites, Hospitality & Residential Spaces, Museums & Galleries, and Offices.



Design And Technology ▶



R&D Lab ◀

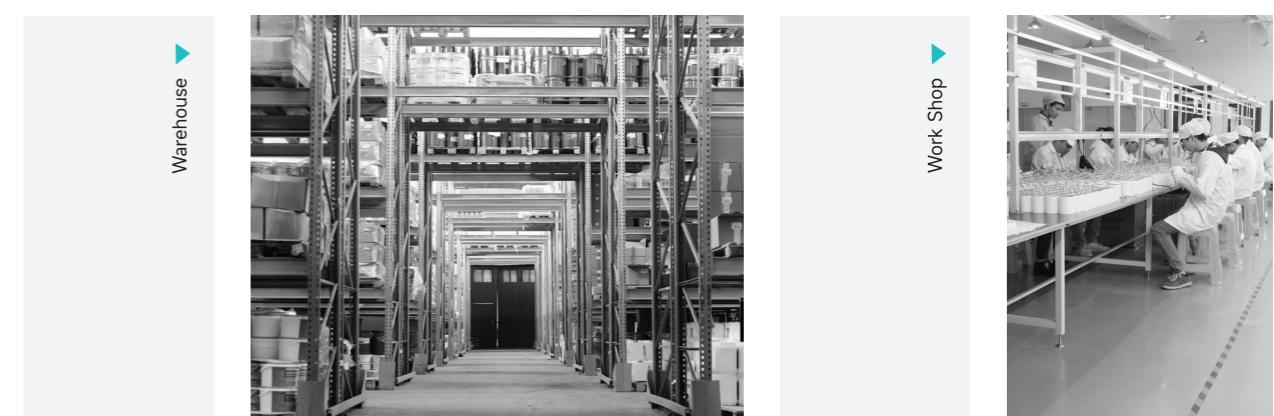


Warehouse ▶


Work Shop ◀

LINEAR Light System

The linear lighting systems feature a strong profile for a nearly hair thin connection in continuous runs. Available in lengths of 2', 3', 4', 6', and 8', as well as custom options. High efficiency (115-130 lm/w) is delivered, with CCT switchable from 3000K to 4000K to suit different indoor settings. Various designs can be formed using L, X, and T joints, with full mounting options pendant, wall, surface, as well as wide range of accessories to provide maximum flexibility.



ARC 2.75"



SLEM 1.7"




ATRO 1"

Comprehensive Lighting Solutions

The up and down LED modules, combined with wide selection of optics gives Linear light series abundant choice of lighting solutions to meet challenging specification.


Ⓐ Beam Optics

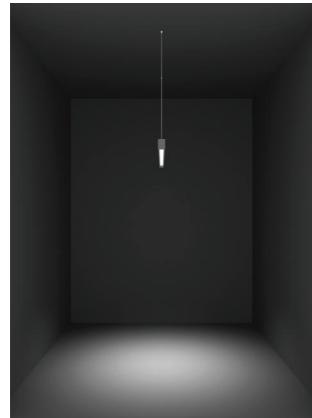

Spot (20°, 40°, 60° / 24°, 36°)




Wide flood (100°)

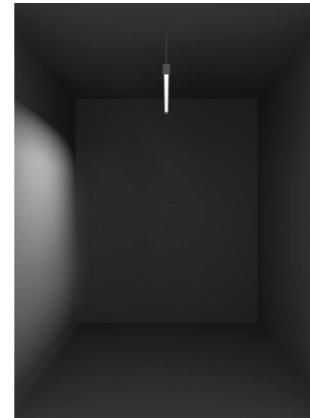


Wall washing

Ⓑ Lighting Types

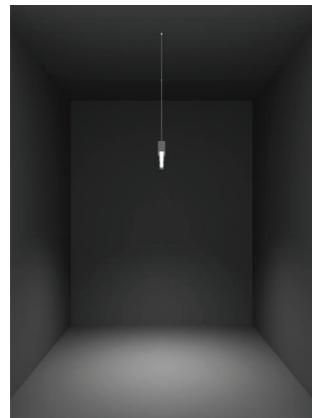

Downlight

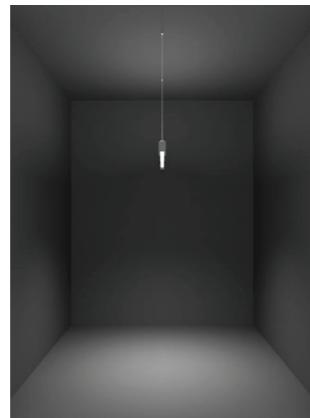


Up/Downlight

We Would Follow James Turrell
For Emotional And Healthy Lighting.




CIRCADIAN LIGHTING (1600K-12000K)

Color temperature ranges from clear blue sky at 12000K to candlelight at 1600K. Circadian Lighting closely follows the Planckian locus and can replicate vast colors of natural light.

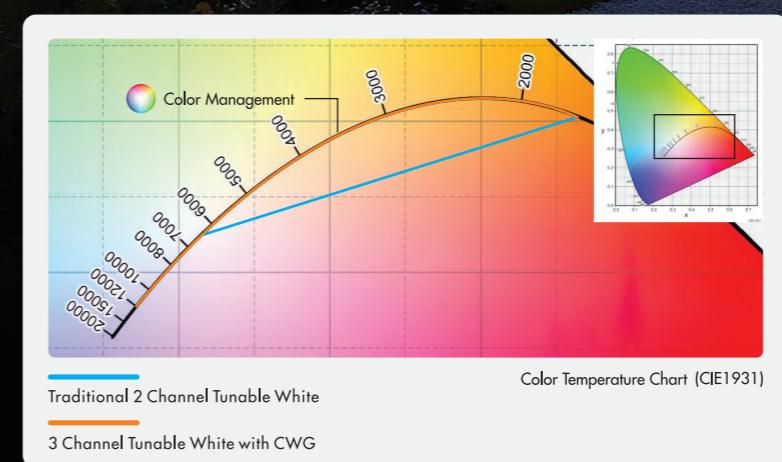


Mounting Flexibility


Linear series is equipped with complete range of mounting options to fit whatever it needs.

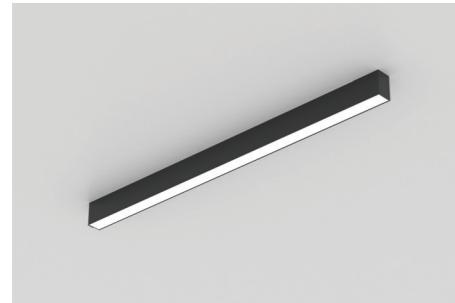


Surface Mounted

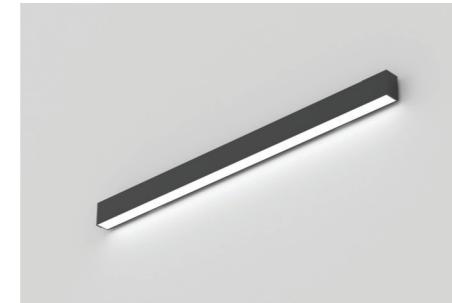


Wall Mounted

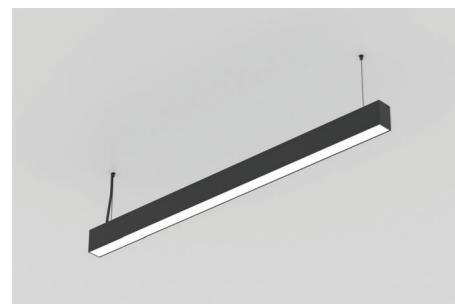


Pendant (Cord)

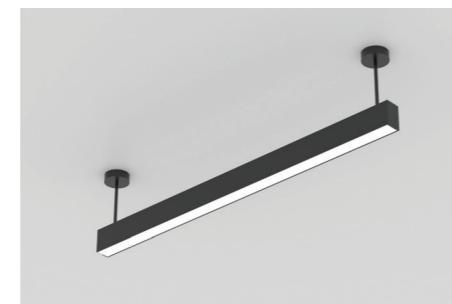

Pendant (Rod)

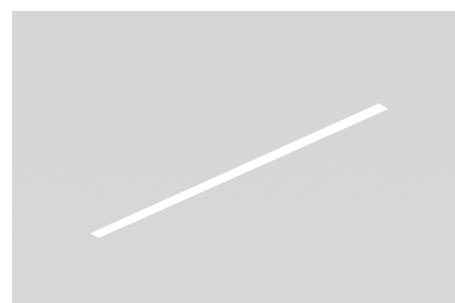

Trimless Recessed

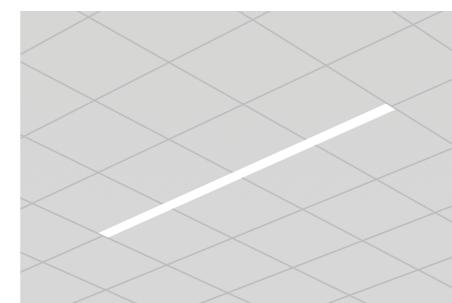

T-Bar Recessed

Application Scenario


Linear light is sleek modern look with a wide selection of optic accessories, combined the high-performance LED to provide excellent illumination for various interior spaces.



Office




Kitchen

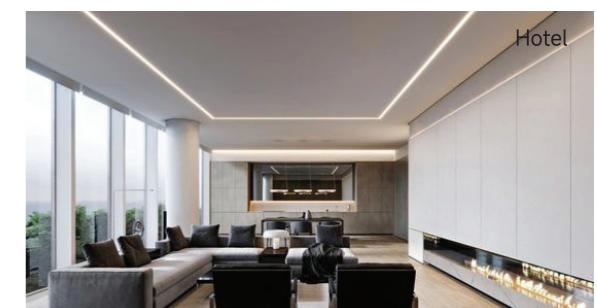

Hotel



Bedroom


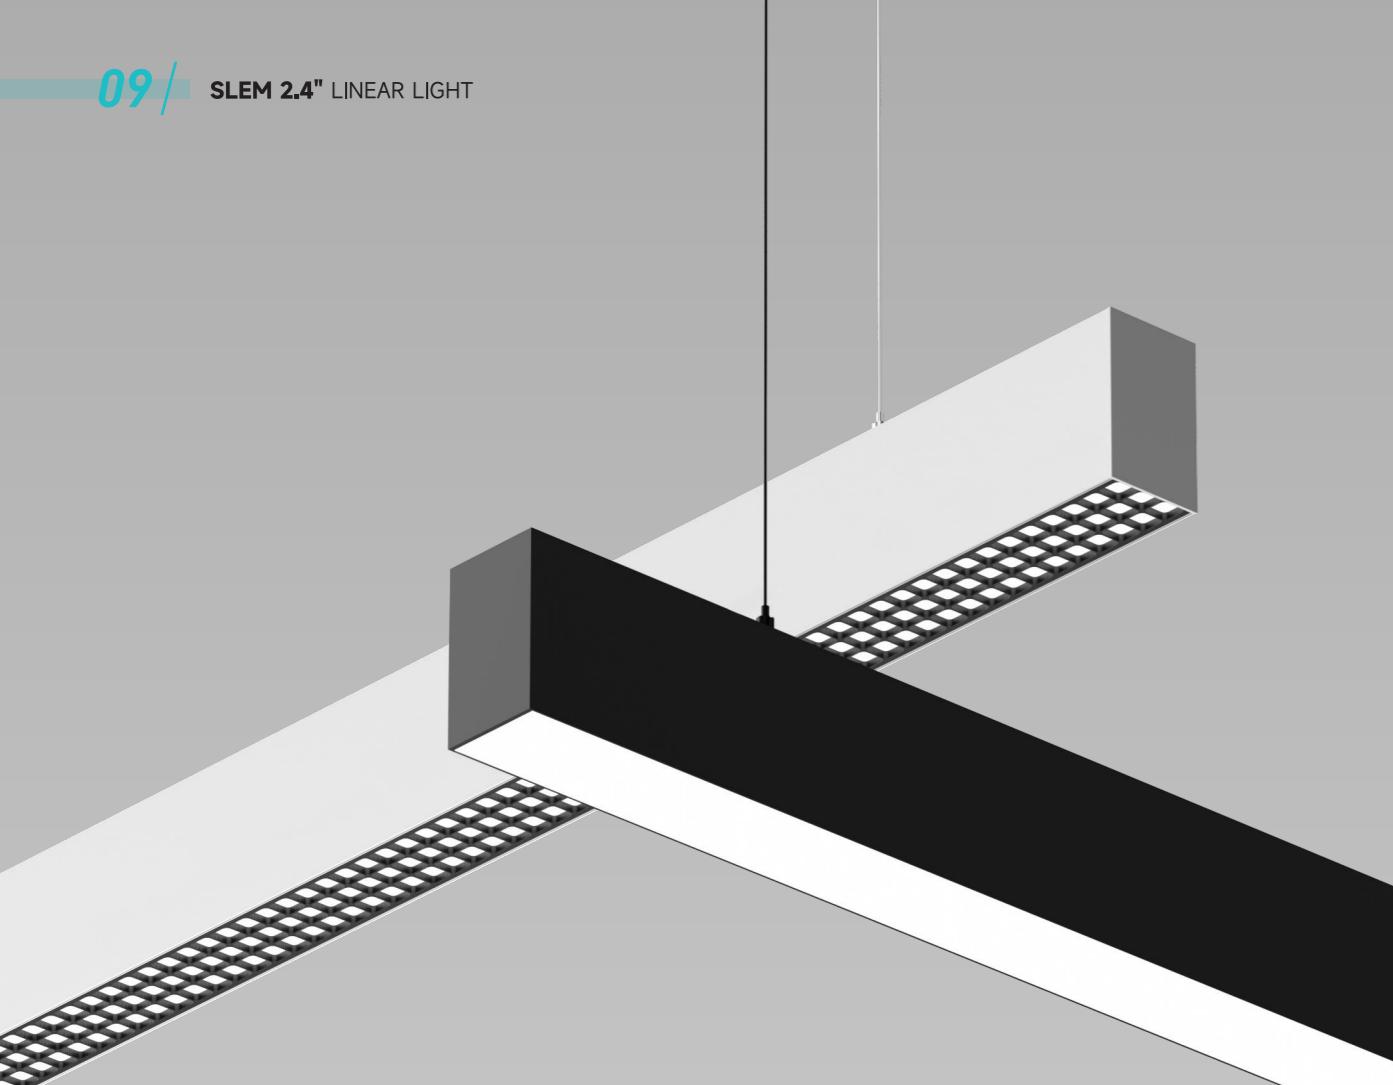


SLEM 2.4"

The 2.4-inch linear LED ceiling light offers efficient, glare-reducing lighting, available in 2 to 6-foot lengths with continuous run, the and hospitality interiors, durable aluminum housing complements a sleek aesthetic, perfect for upscale residential, commercial.




Lighting Solution

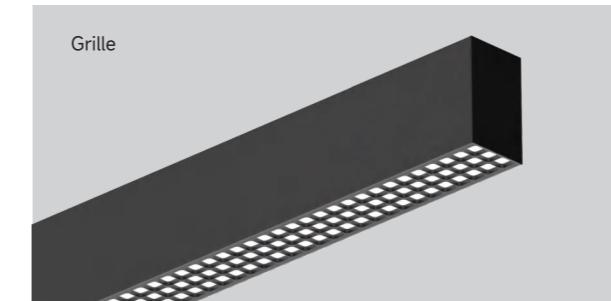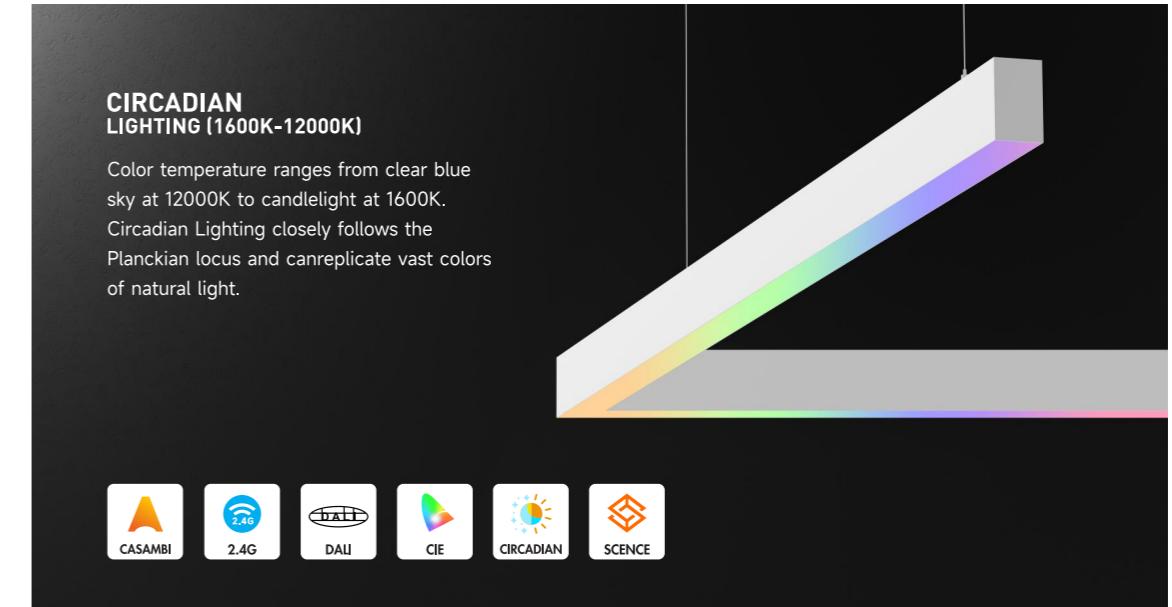

UGR≤15
Innovative optics ensures very low UGR while guaranteeing $\geq 120\text{lm/W}$.



60°
Spot

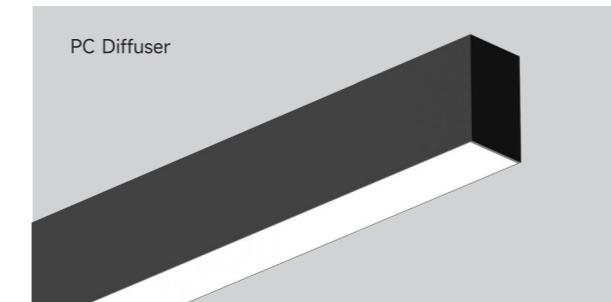


UP/Down Light
Uniform Light Emission Without Shadowed or Dark Areas.



100°
Wide flood



Up/Down
Light

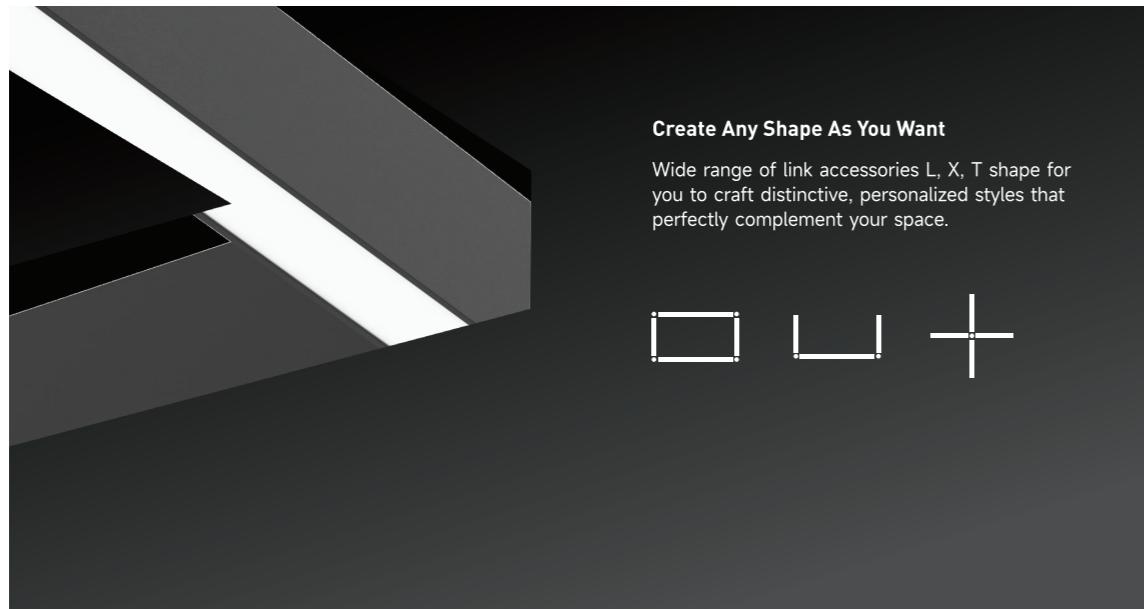Structural Features**Create Any Shape As You Want**

Wide range of link accessories L, X, T shape for you to craft distinctive, personalized styles that perfectly complement your space.

**One-Step Splicing
For Rock-Solid Reliability**

Encore's exclusive patent-pending splicing enables a secure, minimal-seam connection in seconds with just one screw.


**Push To Pop-Off**

Our tool-free, push-click mechanism with spring design enables installation and removal in seconds. Rigorously tested over tens of thousands of cycles, it guarantees long-term reliability, and directly solving the installation challenges of traditional linear lights.






SLEM 2.4"

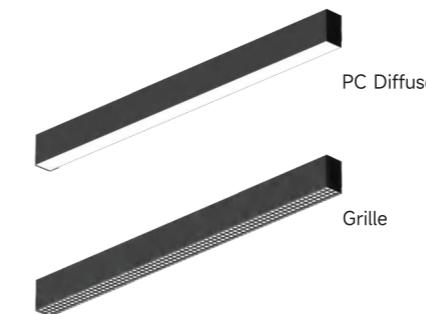

MAIN FEATURES


- 2.4" linear aperture.
- Diffused optical cover / Grille cover available.
- High light efficacy DLC Standard $\geq 120\text{lm/w}$.
- Up and down lighting.
- Easy to connect multiple fixtures for scalable continuous run.
- Quick and easy installation with adjustable suspension wire spacing.

Input Wattage 20W 40W 60W 2FT 4FT 6FT	Delivered Lumens 2400lm-7200lm
Input Voltage 220-240V / 120V-277V input, 50-60Hz	Light Color Static White: 3000K, 4000K, 5000K Color Management: CWG
Dimming Control On-off, 0/1-10V(1%), DALI(1%), CASAMBI	Color Quality CRI 80+/90+, SDCM ≤ 5
Mounting Options Surface Pendant Wall Recessed T-bar	Beam Optics Grille: 60° Spot PC Diffuser: 100° Wide flood
Size L: 2FT / 4FT / 6FT (598/1192/1786mm) W: 2.4inch (61mm) H: 3.94inch (100mm)	Lighting Types Downlight Up/Down Light
Finishes White Black Custom Color	Optical Accessories PC Louver Hex louver
Warranty 5 year limited warranty	Lumen Maintenance 50000h@80%(L80)

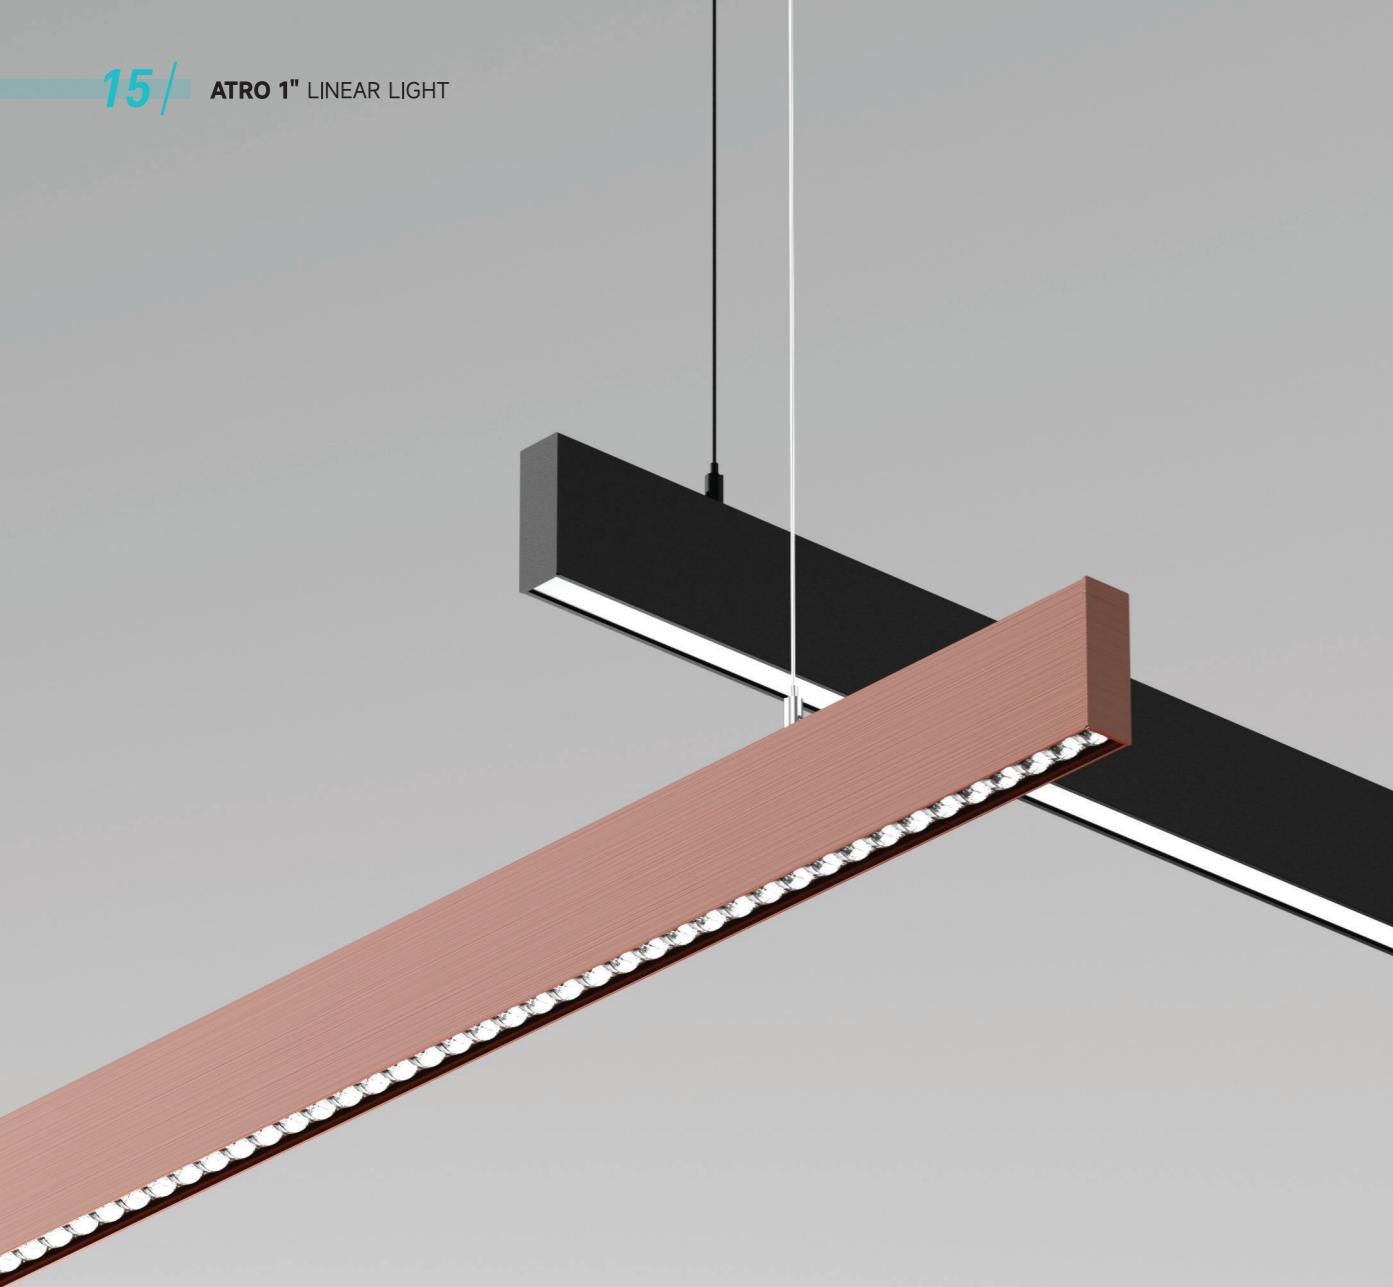

ATRO 1"

This Atro 1-inch linear series features ultra-low-glare lighting solutions designed for maximum visual comfort. The durable aluminum housing complements a sleek aesthetic, perfect for upscale residential, commercial and hospitality interiors.

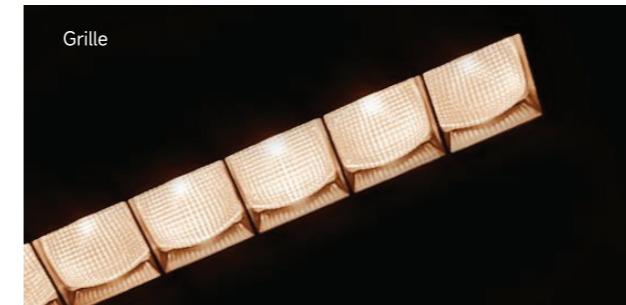


UGR≤8.8

Innovative optics ensures very low UGR while guaranteeing >120lm/W.





UGR ≤ 3.2 with grille cover.



PC Diffuser

1-Inch Ultra-Slim Linear Lighting


Experience the elegance of 1-inch ultra-slim linear lighting, blending seamless design with brilliant illumination.

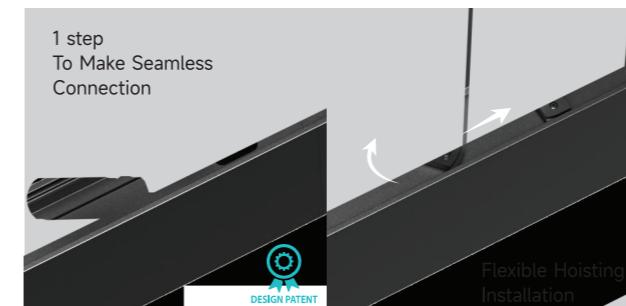

Time-saving Installation



ATRO 1"

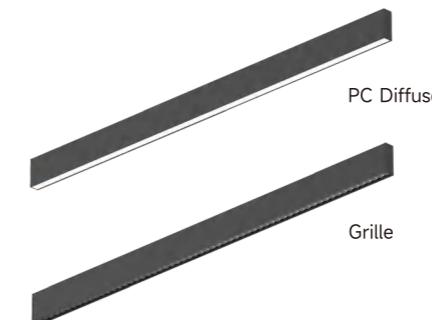

MAIN FEATURES

- Ultra narrow 1" width.
- Diffused optical cover / Grille cover available.
- High light efficacy 120lm/w(Grille).
- UGR<8.8(Grille) For visual comfort.
- Easy to connect multiple fixtures for scalable continuous run.
- Quick and easy installation with adjustable suspension wire spacing.


Input Wattage 25W 30W 50W 3.15FT 3.94FT 5.91FT	Delivered Lumens 1800lm-3600lm(PC Diffuser), 3300lm-4950lm(Grille)
Input Voltage 220-240V / 120V-277V input, 50-60Hz	Light Color Static White: 2700K, 3000K, 3500K, 4000K, 5000K
Dimming Control On-off, 0/1-10V, DALI	Color Quality CRI 80+, SDCM≤5
Mounting Options  Pendant	Beam Optics Grille Cover:  20°, 40° Spot  60° Flood  20°x20° Rectangular PC Diffuser:  100° Wide flood
Size L: 3.15FT / 3.94FT / 5.91FT (960/1200/1800mm) W: 1inch (26mm) H: 3inch (77mm)	Lighting Types  Downlight
Finishes  White  Black  Custom Color	Optical Accessories None
Warranty 5 year limited warranty	Lumen Maintenance 50000h@80%(L80)



ARC 2.75"


The series features unique dual-level control, allowing users to select from a diverse range of independently controllable direct and indirect light distributions, creating light both visually pleasing and comfortable.

It fits multiple ceiling types, includes suspended, recessed, wall, surface. Available in lengths of 2', 3', 4', 6', 8', and continuous runs. Perfect for commercial open offices, private offices, conference rooms, corridors, educational facilities, and more.

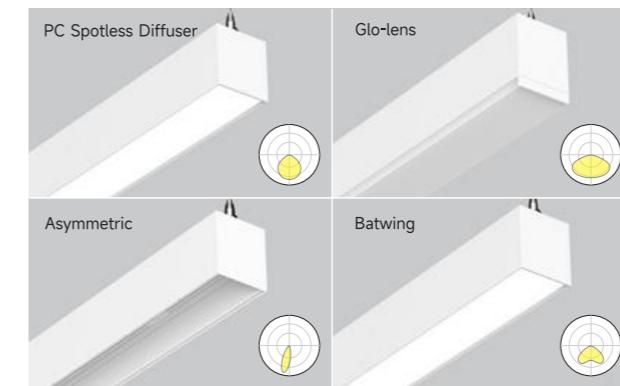

Optical Lens

Seamlessly integrate ARC linear with a variety of lens options to create a lighting solution tailored to your vision.

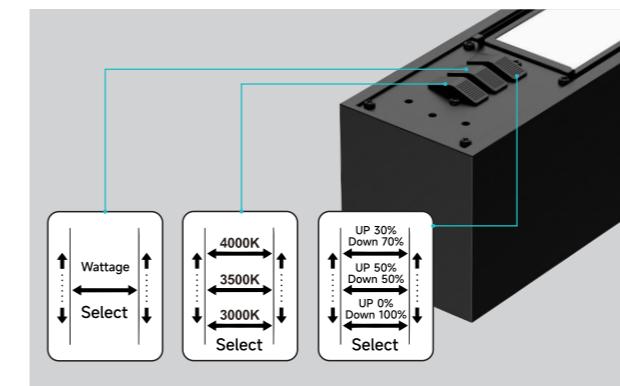

CCT & Wattage Switch

Allows the end user to select between wattage and CCT (3000K, 3500K or 4000K) at the time of installation with a 3 position switch.




Sensor Controls

Bluetooth mesh control for Smart Loop system for easy and precise adjustment

Create Any Shape As You Want

Wide range of link accessories L, X, T and Y shape for you to craft distinctive, personalized styles that perfectly complement your space

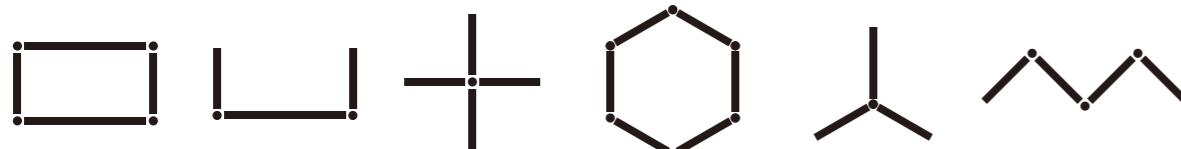

Lit-Pattern Connectors



L-Shape

T-Shape

X-Shape

120° L-Shape

Y-Shape

Non Lit-Pattern Connectors



2 Head x 60°

3 Head x 60°

4 Head x 60°

5 Head x 60°

6 Head x 60°



L-Shape



T-Shape

X-Shape

Z-Shape



ARC 2.75"

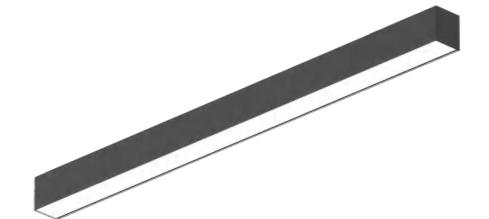

MAIN FEATURES

- Sleek architectural design and quality.
- 2.75" linear aperture.
- Available in 2', 3', 4', 6', 8' lengths for individual or continuous runs.
- High light efficacy 115-130lm/w.
- Multiple installation types including suspended, recessed, surface, and wall.
- CCT Switchable from 3000K, 3500K, 4000K.
- Up and down lighting with flexible intensity adjustment.
- Highly customizable with X, Y, T etc Joints.
- Integrated sensor system for smart control.
- Emergency battery backup available.
- Easy replacement and maintenance with removable accessories.

Input Wattage 20W 30W 40W 60W 80W 2FT 3FT 4FT 6FT 8FT	Delivered Lumens 2300lm-9200lm
Input Voltage 120V-347V input, 50-60Hz	Light Color Static White: 3000K, 3500K, 4000K
Dimming Control On-off, 0-10V, Triac, DALI	Color Quality CRI 80+, SDCM≤5
Mounting Options Surface Pendant Wall Recessed T-bar	Optics lens PC Spotless Diffuser Glo-lens Asymmetric Batwing
Size L: 2FT / 3FT / 4FT / 6FT / 8FT (606/906/1206/1806/2406mm) W: 2.75inch (70mm) H: 3.15inch (80mm)	Lighting Types Downlight Up/Downlight
Finishes White Black Custom Color	Optical Accessories PC Louver Hex Louver
Warranty 5 year limited warranty	Lumen Maintenance 50000h@80%(L80)

CYLINDER

Encore CYLINDER series features minimalist modern design, equipped with a wide selection of optical accessories and high performance LED to provide ideal illumination versatile enough for whatever your project's needs.

The thoroughly optimization from structure and lighting towards the pain points of industry make it more easy to install, maintain, and more neat for beautiful look.



NOVA

OVEGA

GALAXY



OVEGA Cylinder

UNLIMITED POSSIBILITIES with OVEGA family. Four versions in excellent modular combination concept with similar appearances but different light solutions entitle OVEGA family will fit smoothly into any retail, museums and galleries environment.

NOVA Cylinder

Simple, yet elegant, the NOVA Tube Cylinder is the perfect minimalist piece to light your modern home. The silhouette of the pieces flows with symmetry, from the smooth, disc-shaped ceiling mount to the clean and thin, cylindrical body. An integrated, energy-efficient LED tucked into the body brings a crisp, focused glow directly beneath the fixture.



GALAXY Cylinder

Elegant and timeless, the GALAXY Cylinder is a stunning choice for any modern spaces. Its robust construction and understated sophistication set it apart as a fixture of enduring style. The pendant features a sleek, round metal drum shade with an open bottom, designed to deliver direct, focused light where it's needed most.




UGR < 6

Cut-off 50°
With Black Light Treatment For
Unmatched Visual Comfort.

NOVA Cylinder


Encore cylinders are made with every detail count, the special engineered canopy, 2 in 1 cord and versatile interchangeable accessories to make it a unmatched option.

Smart & Durable Design

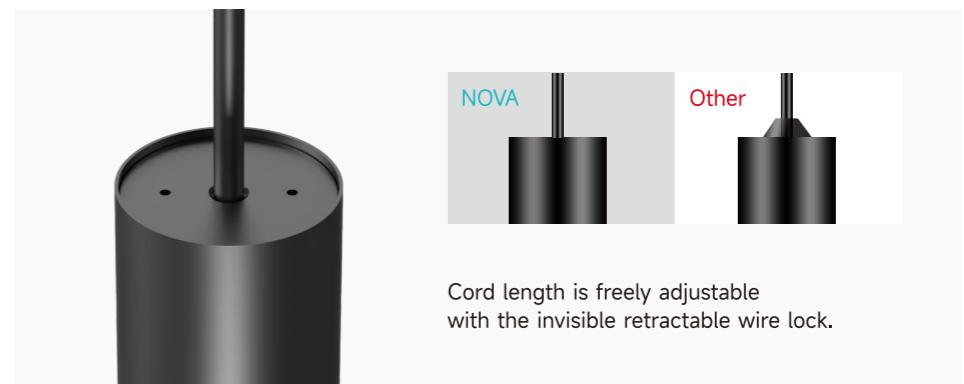

Versatile Finishes

NOVA offers different high-quality finishes, allowing you to customize your lighting to seamlessly integrate with your space. Choose from classic black, white and yellow and more options in customization.

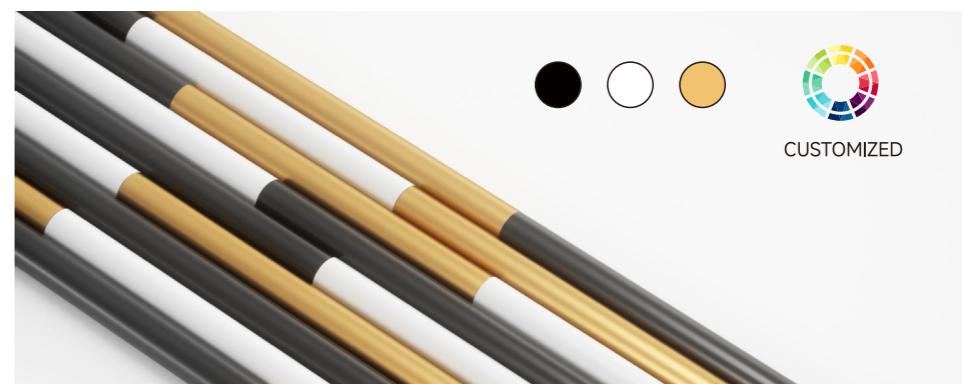

Mounting Options





NOVA Cylinder



MAIN FEATURES

- Ultra thin 1" dia. available.
- Low glare UGR<6 for visual pleasing and comfort.
- Family design in 2 sizes.
- Multiple mounting options: pendant, surface, track.
- High quality finish in versatile colors.

Input Wattage 8W-12W	Delivered Lumens 300lm-1000lm
Input Voltage 220-240V / 120V / 277V input, 50-60Hz	Light Color Static White: 2700K, 3000K, 3500K, 4000K
Dimming Control On-off, DALI, TRIAC	Color Quality CRI 90+, SDCM≤3
Mounting Options Track Surface Pendant	Beam Optics 15° Narrow Spot 24°, 36° Spot 50° Flood
Size Φ30mm L: 300/500/800mm Φ45mm L: 450/600/800mm	Lighting Types Downlight
Finishes White Black Gold Custom Color	Optical Accessories Honeycomb Soft lens
IP Rating IP20	Secondary Reflector Black Bright silver Matt silver Gold
Warranty 5 year limited warranty	Lumen Maintenance 50000h@80%(L80)



OVEGA Cylinder

In versions with different light solutions, OVEGA covers high performance accent lighting with very narrow beam 6°, different interchangeable beam lens & different optical accessories, flood lighting of exhibits, beam angle adjusting from narrow to wide, wall washing and projection.


Except versatile light solutions, OVEGA is also a complete family with different installation methods (Track-mounted, Pendant, Surface-mounted and Wall-mounted). So, if you have an environment where ask for different light solutions & different installation methods, OVEGA family will be a great choice to get a unified impression.

OVEGA Cylinder Series






Optical Accessories

Can be dressed in 4 kinds of optical accessories to enhance the visual quality, reduce glare and cut off the light.

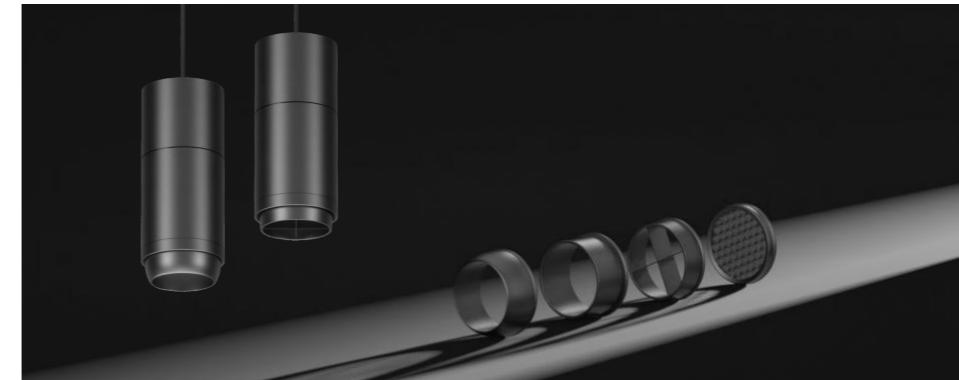

Excellent Modular Combination Concept

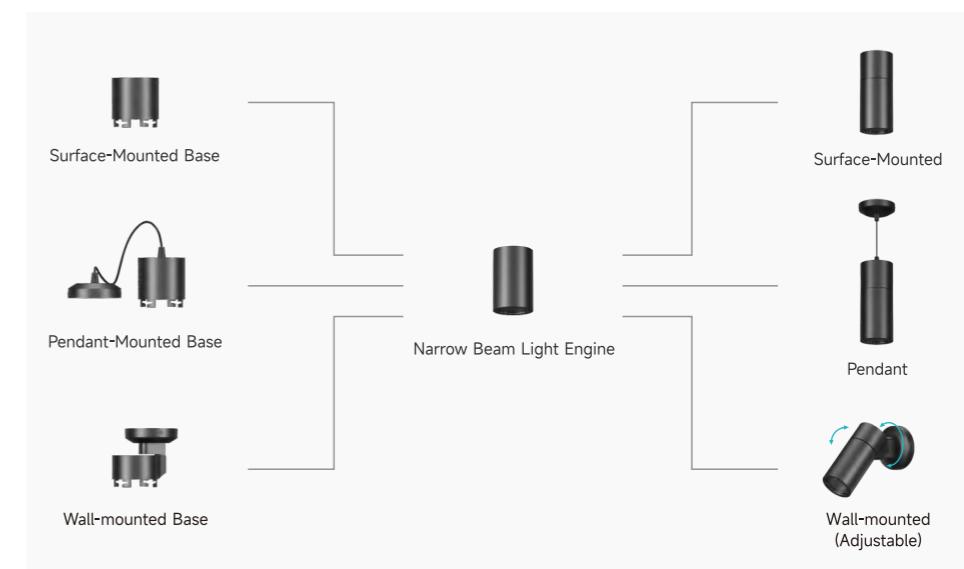

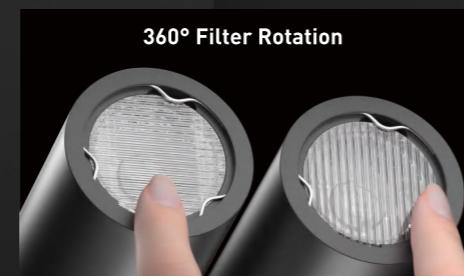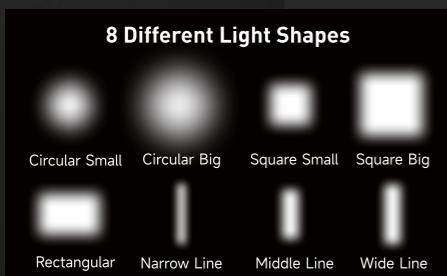

OVEGA-Narrow Beam



MAIN FEATURES

- Stylish and compact design with integrated driver.
- Very narrow beam 6° with quality light distribution.
- Simply adding extra optical accessories, the light shape can be changed to square, rectangular, line.....
- Use OVEGA family to get a unified impression in one environment.

Input Wattage 10W	Delivered Lumens 586lm
Input Voltage 220-240V / 120V / 277V input, 50-60Hz	Light Color Static White: 2700K, 3000K, 4000K, 5000K
Dimming Control On-off, 0/1-10V, DALI, TRIAC	Color Quality CRI 90+, SDCM≤3
Mounting Options <input type="checkbox"/> Surface <input type="checkbox"/> Pendant <input type="checkbox"/> Wall	Beam Optics <input type="checkbox"/> 6° Narrow Spot
Size <input type="checkbox"/> Ø60mm L:157mm	Lighting Types <input type="checkbox"/> Downlight
Finishes <input type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Grey	Optical Accessories <input type="checkbox"/> Filters
IP Rating IP20	Secondary Reflector None
Warranty 5 year limited warranty	Lumen Maintenance 50000h@80%(L80)



OVEGA-Standard



MAIN FEATURES

- Stylish and compact design with integrated driver.
- Excellent modular combination concept: integrated driver+ different fixture bases, DIY to get different light solutions and easy for maintenance.
- Light efficiency is up to 95lm/W.
- Interchangeable lens: 15°, 24°, 38°, 60°.
- Use OVEGA family to get a unified impression in one environment.

Input Wattage 20W-30W	Delivered Lumens 1800lm(20W), 2070lm(25W), 2358lm(30W)
Input Voltage 220-240V / 120V / 277V input, 50-60Hz	Light Color Static White: 2700K / 3000K / 3500K / 4000K
Dimming Control On-off, 0/1-10V, DALI, TRIAC	Color Quality CRI 90+, SDCM≤3
Mounting Options Surface Pendant Wall	Beam Optics <input type="checkbox"/> 15° Narrow Spot <input type="checkbox"/> 24°, 38° Spot <input type="checkbox"/> 60° Flood
Size Ø84mm L:178mm	Lighting Types Downlight
Finishes White Black Grey	Optical Accessories None
IP Rating IP20	Secondary Reflector None
Warranty 5 year limited warranty	Lumen Maintenance 50000h@80%(L80)



OVEGA-Premium



MAIN FEATURES

- Stylish and compact design with integrated driver.
- Excellent modular combination concept: integrated driver+ different fixture bases, DIY to get different light solutions and easy for maintenance.
- Can be dressed in 6 kinds of optical accessories to enhance the visual quality, reduce glare and cut off the light.
- Light efficiency is up to 110lm/W.
- Interchangeable lens: 15°, 24°, 38°, 60°.
- Use OVEGA family to get a unified impression in one environment.

Input Wattage 10W-15W, 20W-30W	Delivered Lumens 877lm-1158lm(10W-15W), 1883lm-2714lm(20W-30W)
Input Voltage 220-240V / 120V / 277V input, 50-60Hz	Light Color Static White: 2700K / 3000K / 3500K / 4000K
Dimming Control On-off, 0/1-10V, DALI, TRIAC	Color Quality CRI 90+, SDCM≤3
Mounting Options <div style="display: flex; justify-content: space-around;"> Surface Pendant Wall </div>	Beam Optics <div style="display: flex; justify-content: space-around;"> 15° Narrow Spot 24°, 38° Spot 60° Flood </div>
Size <div style="display: flex; justify-content: space-around;"> Φ60mm L:157mm Φ84mm L:182mm </div>	Lighting Types <div style="display: flex; justify-content: space-around;"> Downlight </div>
Finishes <div style="display: flex; justify-content: space-around;"> White Black Grey </div>	Optical Accessories <div style="display: flex; justify-content: space-around;"> Honeycomb Snoot Wall Washing Ring Cross Louver Eye Snoot Barn Door </div>
IP Rating IP20	Secondary Reflector None
Warranty 5 year limited warranty	Lumen Maintenance 50000h@80%(L80)



OVEGA-Zoomable



MAIN FEATURES


- Stylish and compact design with integrated driver.
- Excellent modular combination concept: integrated driver+ different fixture bases, DIY to get different light solutions and easy for maintenance.
- Beam angle adjustable mechanism provides endless beam options from a narrow to wide flood distribution by simply rotate the rubber ring.
- Light efficiency is up to 90lm/W.
- Use OVEGA family to get a unified impression in one environment.

Input Wattage 10W-15W, 20W-30W	Delivered Lumens 845lm-1084lm(10W-15W), 1365lm-2043lm(20W-30W)
Input Voltage 220-240V / 120V / 277V input, 50-60Hz	Light Color Static White: 2700K / 3000K / 3500K / 4000K
Dimming Control On-off, 0/1-10V, DALI, TRIAC, CASAMBI	Color Quality CRI 90+, SDCM≤3
Mounting Options Surface Pendant Wall	Beam Optics 15°-40° (10W-15W) 10°-60° (20W-25W) 25°-60° (30W)
Size Ø60mm L:160mm Ø84mm L:190mm	Lighting Types Downlight
Finishes White Black Grey	Optical Accessories Honeycomb Filters
IP Rating IP20	Secondary Reflector None
Warranty 5 year limited warranty	Lumen Maintenance 50000h@80%(L80)



GALAXY Cylinder


Galaxy Cylinder is a family series combines elegant aesthetic design, full mounting options and multiple functions. Perfect for enhancing open floor plans, this pendant adds both substance and visual interest to larger spaces.

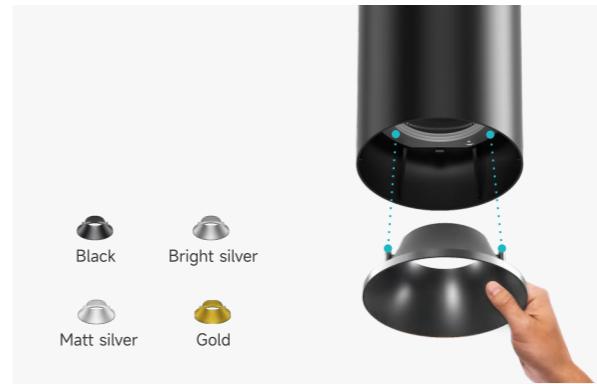

UGR<16 tool-free magnetic reflector replacement without the need for positioning.



Built-in switch for CCT selectable from 2700K, 3000K, 4000K

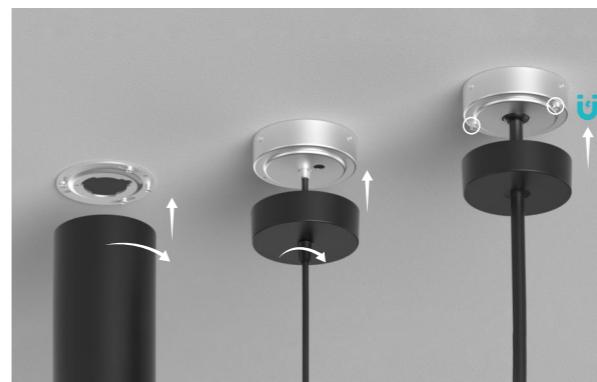

Very Clean Appearance,
With No Screws Exposed!

Mounting Flexibility


Galaxy cylinder is equipped with complete range of mounting options to fit whatever it needs.



■ Surface



■ Pendant
(Separate cord & wire)

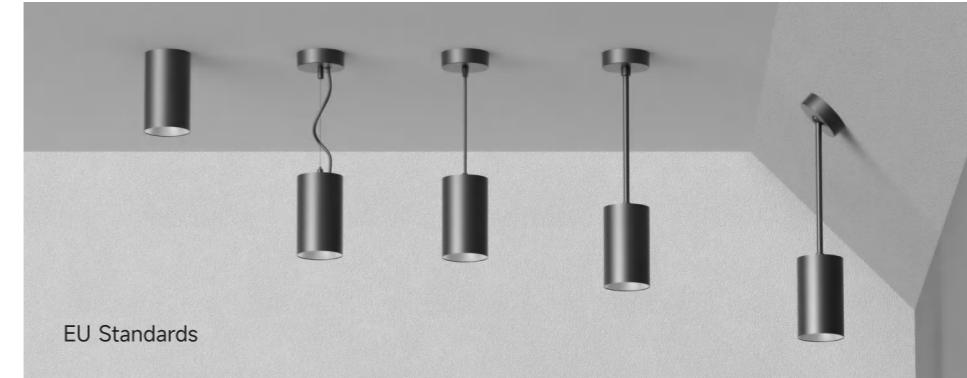


EU Standards



■ Pendant
(Integrated cord & wire)



■ Pendant
(Rod Fixed)

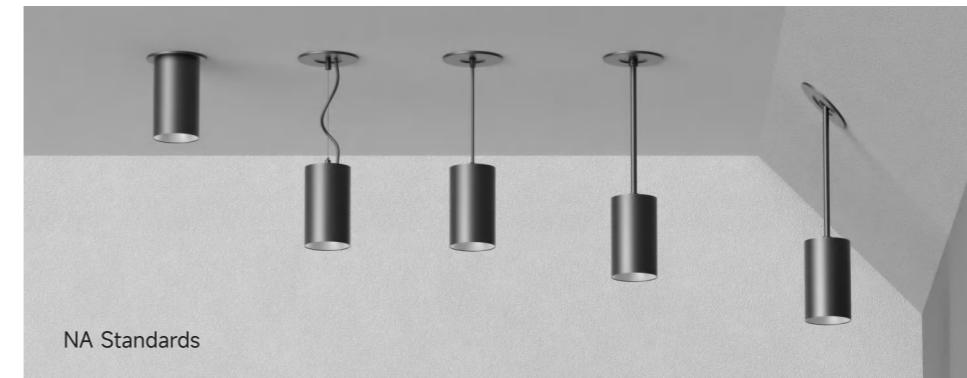

NA Standards



■ Pendant
(Rod Adjustable)



NA Standards (J-box)



GALAXY 4"



MAIN FEATURES

- Low glare UGR<16 for visual comfort.
- Tunable white 2700-5000K.
- Wide range of dimming methods.
- Family design in 3 sizes.
- Multiple mounting options: pendant, surface, wall.
- High quality finish in versatile colors.

Input Wattage 20W-25W	Delivered Lumens 1730lm-2056lm
Input Voltage 220-240V / 120V / 277V input, 50-60Hz	Light Color Static White: 2700K, 3000K, 4000K, 5000K Tunable White: 2700K-5000K CCT Selectable : 2700K-3000K-4000K
Dimming Control On-off, 0/1-10V, DALI, TRIAC, CCT Switch, CASAMBI	Color Quality CRI 90+, SDCM≤3
Mounting Options Surface Pendant (Separate cord & wire) Pendant (Integrated cord & wire) Pendant (Rod Fixed) Pendant (Rod Adjustable)	Beam Optics 24°, 38° Spot 50° Flood
Size Ø96mm L:165mm	Lighting Types Downlight
Finishes White Black Silver Bronze Custom Color	Optical Accessories None
IP Rating IP20	Secondary Reflector Black Bright silver Matt silver Gold
Warranty 5 year limited warranty	Lumen Maintenance 50000h@80%(L80)



GALAXY 5"



MAIN FEATURES

- Low glare UGR<16 for visual comfort.
- Tunable white 2700-5000K.
- Wide range of dimming methods.
- Family design in 3 sizes.
- Multiple mounting options: pendant, surface, wall.
- High quality finish in versatile colors.

Input Wattage 30W-35W	Delivered Lumens 2672lm-3023lm
Input Voltage 220-240V / 120V / 277V input, 50-60Hz	Light Color Static White: 2700K, 3000K, 4000K, 5000K Tunable White: 2700K-5000K CCT Selectable : 2700K-3000K-4000K
Dimming Control On-off, 0/1-10V, DALI, TRIAC, CCT Switch, CASAMBI	Color Quality CRI 90+, SDCM≤3
Mounting Options Surface Pendant (Separate cord & wire) Pendant (Rod Fixed) Pendant (Rod Adjustable)	Beam Optics 24°, 38° Spot 50° Flood
Size Ø123mm L:165mm	Lighting Types Downlight
Finishes White Black Silver Bronze Custom Color	Optical Accessories None
IP Rating IP20	Secondary Reflector Black Bright silver Matt silver Gold
Warranty 5 year limited warranty	Lumen Maintenance 50000h@80%(L80)



GALAXY 6"



MAIN FEATURES

- Low glare UGR<16 for visual comfort.
- Tunable white 2700-5000K.
- Wide range of dimming methods.
- Family design in 3 sizes.
- Multiple mounting options: pendant, surface, wall.
- High quality finish in versatile colors.

Input Wattage 40W-45W	Delivered Lumens 3926lm-4162lm
Input Voltage 220-240V / 120V / 277V input, 50-60Hz	Light Color Static White: 2700K, 3000K, 4000K, 5000K Tunable White: 2700K-5000K CCT Selectable : 2700K-3000K-4000K
Dimming Control On-off, 0/1-10V, DALI, TRIAC, CCT Switch, CASAMBI	Color Quality CRI 90+, SDCM≤3
Mounting Options Surface Pendant (Separate cord & wire) Pendant (Rod Fixed) Pendant (Rod Adjustable)	Beam Optics 24°, 38° Spot 50° Flood
Size Ø146mm L:180mm	Lighting Types Downlight
Finishes White Black Silver Bronze Custom Color	Optical Accessories None
IP Rating IP20	Secondary Reflector Black Bright silver Matt silver Gold
Warranty 5 year limited warranty	Lumen Maintenance 50000h@80%(L80)

You can also visit our website and follow us on social media for the latest updates on Nuordic.




www.nuordic.com



Official Website

On our website, you'll find the latest company news, product releases, technology updates, detailed product information, videos, and everything else you need.

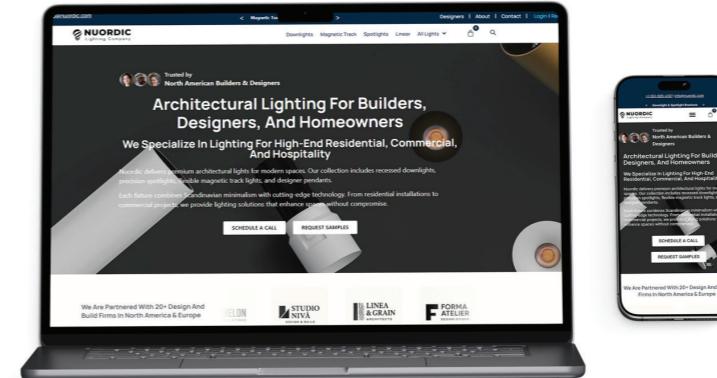

website
www.nuordic.com


Follow us:



Nuordic Commercial lighting

YouTube

On YouTube you can get all of our product features, installation tutorials, light effect demonstrations and a series of actual demonstration videos you want to know about our products.

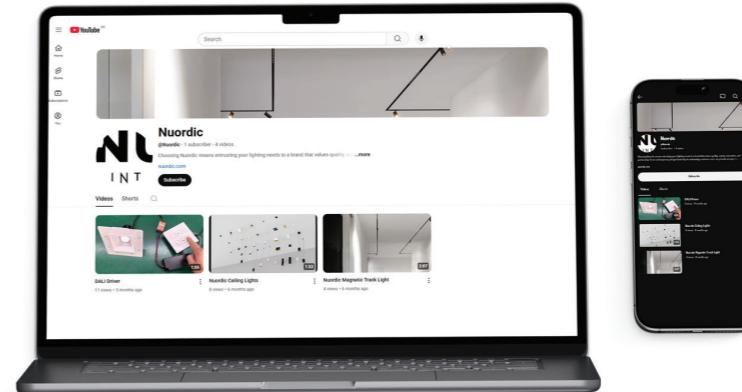

YouTube
Nuordic Commercial lighting