




**PROFESSIONAL LED LIGHTING SOLUTIONS PROVIDER FOR
COMMERCIAL SITES, HOSPITALITY & RESIDENTIAL SPACES,
MUSEUMS & GALLERIES, AND OFFICES.**

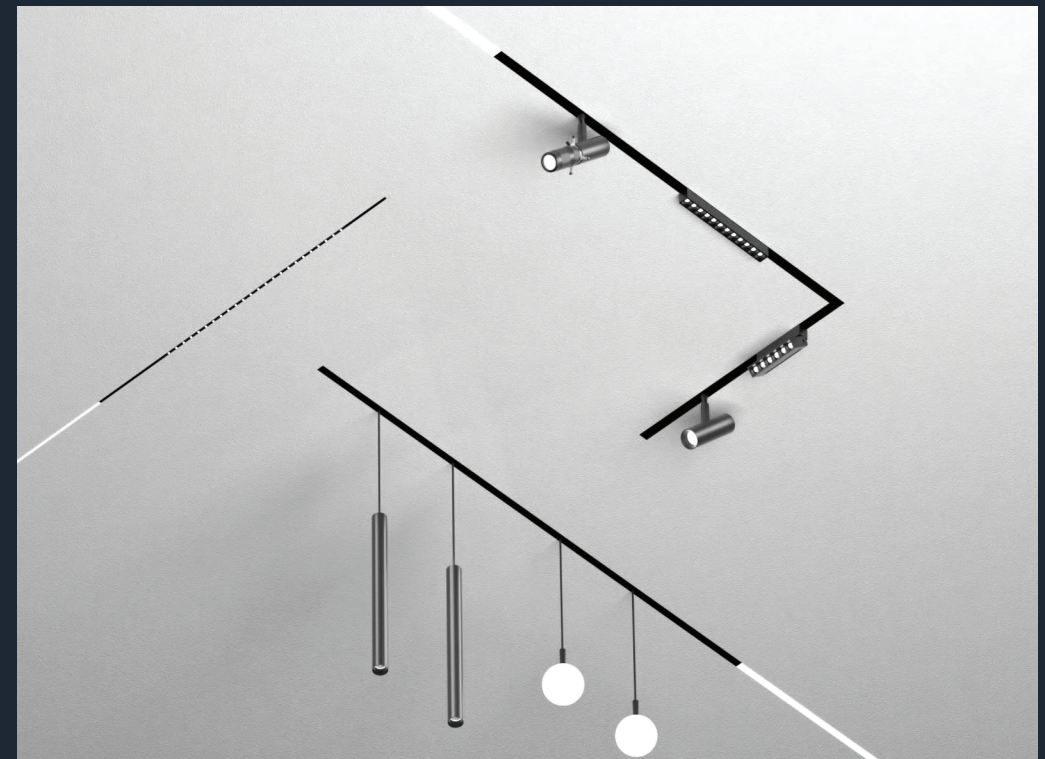

MAGNETIC TRACK LIGHT SYSTEM
2025-2026 EDITION

Table of Contents

THE ENCORE ADVANTAGE

01 / Company Profile

03 / Magnetic Track System

09 / Smart Control

48V MAGNETIC TRACK SYSTEM

13 / 20mm-Magnetic Track

13 / 20mm-Magnetic Luminaire

41 / 15mm-Magnetic Track

41 / 15mm-Magnetic Luminaire

24V MAGNETIC TRACK SYSTEM

53 / 5mm-Magnetic Track


53 / 5mm-Magnetic Luminaire





Professional LED lighting Solutions Provider
For Commercial Sites, Hospitality & Residential Spaces, Museums & Galleries, and Offices.

Design And Technology

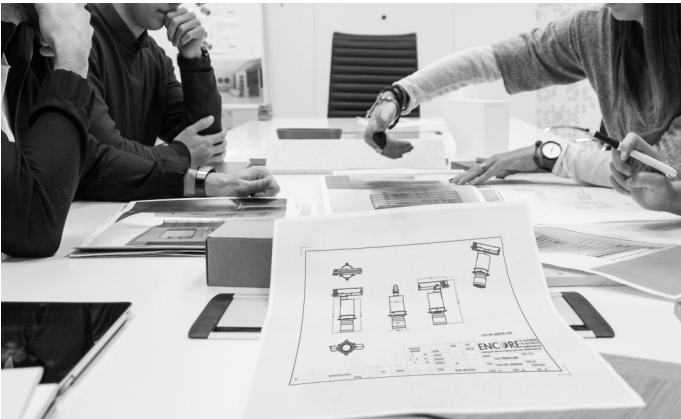

R&D Lab



Warehouse




Work Shop



MAGNETIC TRACK LIGHT SYSTEM

It's available in 24V and 48V, offers a comprehensive range of solutions, including general illumination, wall washing, decorative lighting, and functional projector lighting. Designed for versatility. In the same time combined with specially designed contact points to prevent deformation or contact issues over time. Built-in springs, processed for enhanced durability, maintain consistent tension even as copper components age. Additionally, the system is fully compatible with Stucchi, ensuring reliability and flexibility for diverse projects.



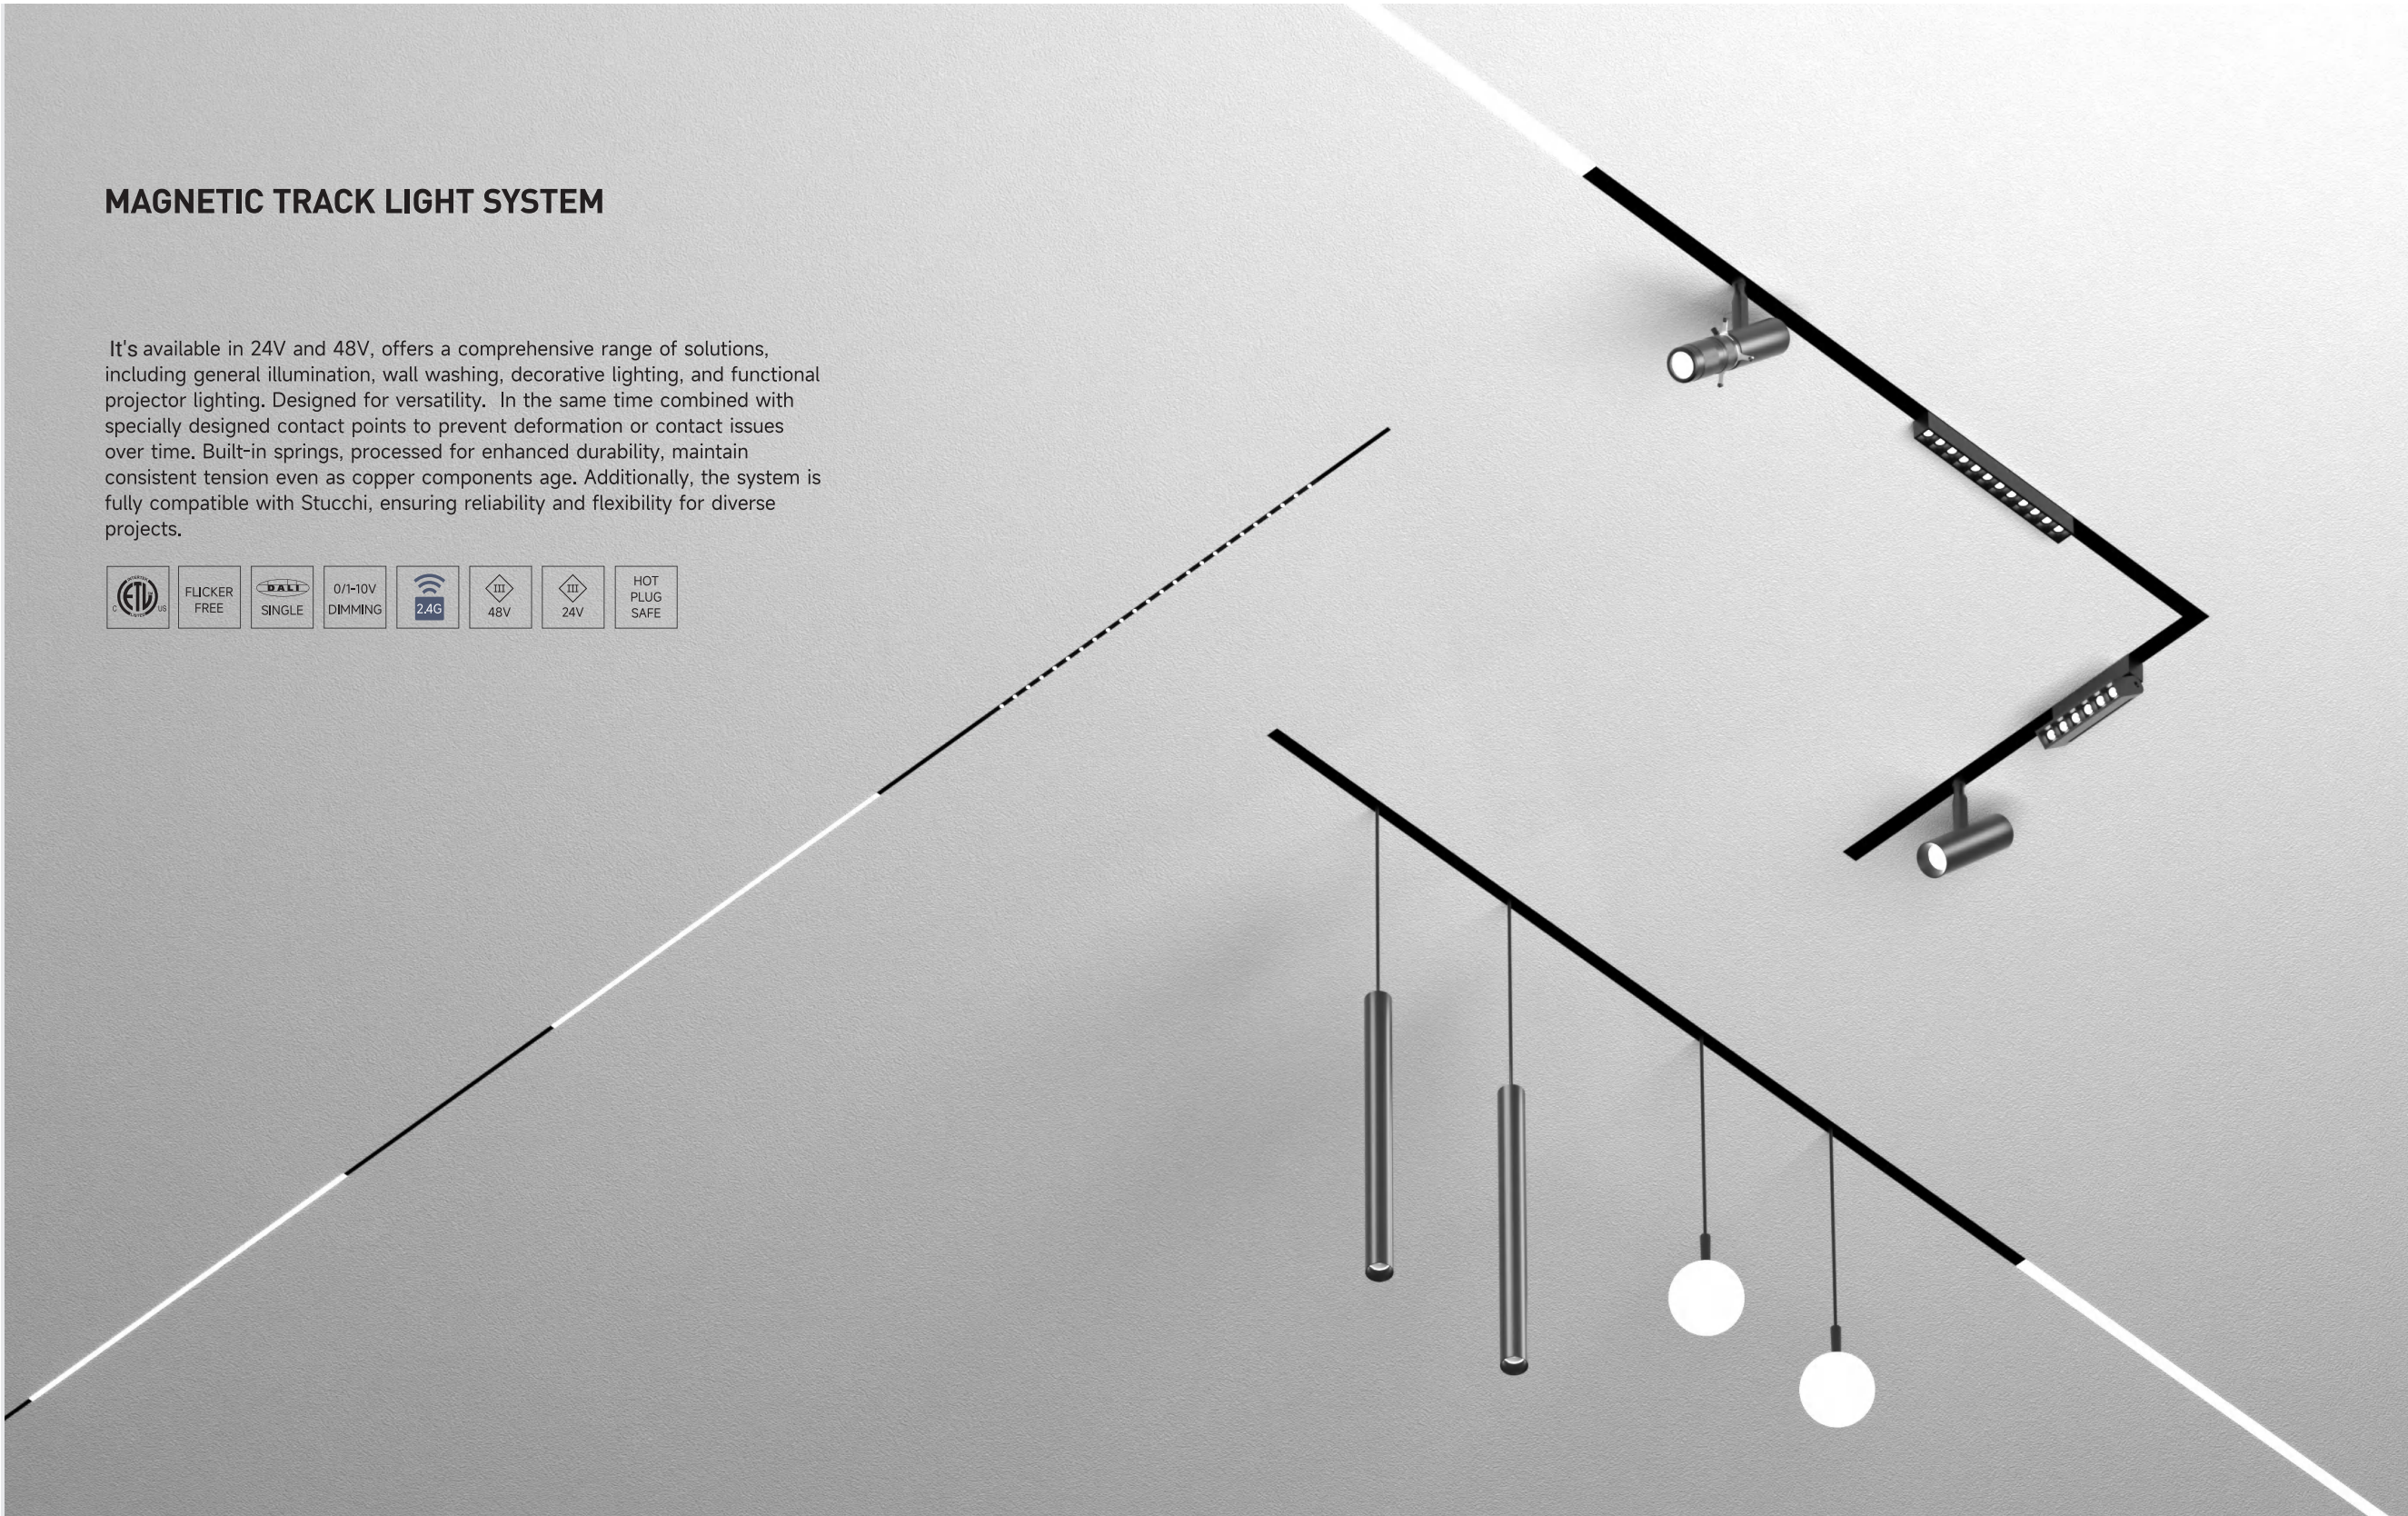



FLEXIBILITY IN INSTALLATION

The magnetic track lighting system offers different installation types. One profile with 4 options: surface-mounted, built-in and semi-recessed with the recessed kit and suspended with the suspension kit.


There is a special trimless recessed profile for plaster walls and ceilings. In combination with various corner connections, Encore magnetic lighting moves effortlessly through any room.




- Copper strip made of high purity red copper for superior conductivity.
- Copper strip thickness 0.6/0.8 mm.
- Copper and plastic extruded as one part.
- The "ladder type" design to avoid slip out of copper strip.

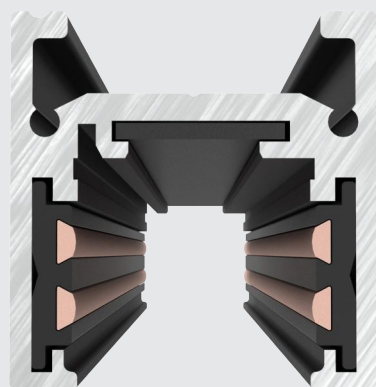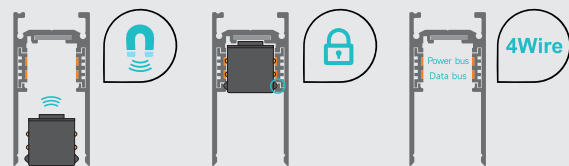

MAGNETIC MODULE

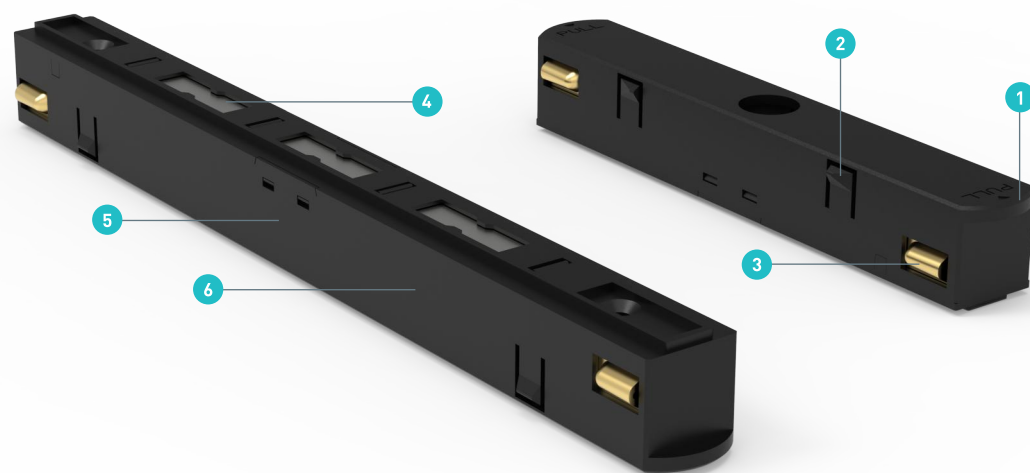

- 1 Auxiliary pull-out buckle design
- 2 Mechanical buckle design
- 3 Wide conductive copper design
- 4 Super magnetic structure on the top
- 5 Adopt the laptop shell Surface treatment process With a more attractive outlook.
- 6 PC(High-class polycarbonate) V0 flame retardant material, impact and oxidation resistance, longer lifetime, to ensure product safety.

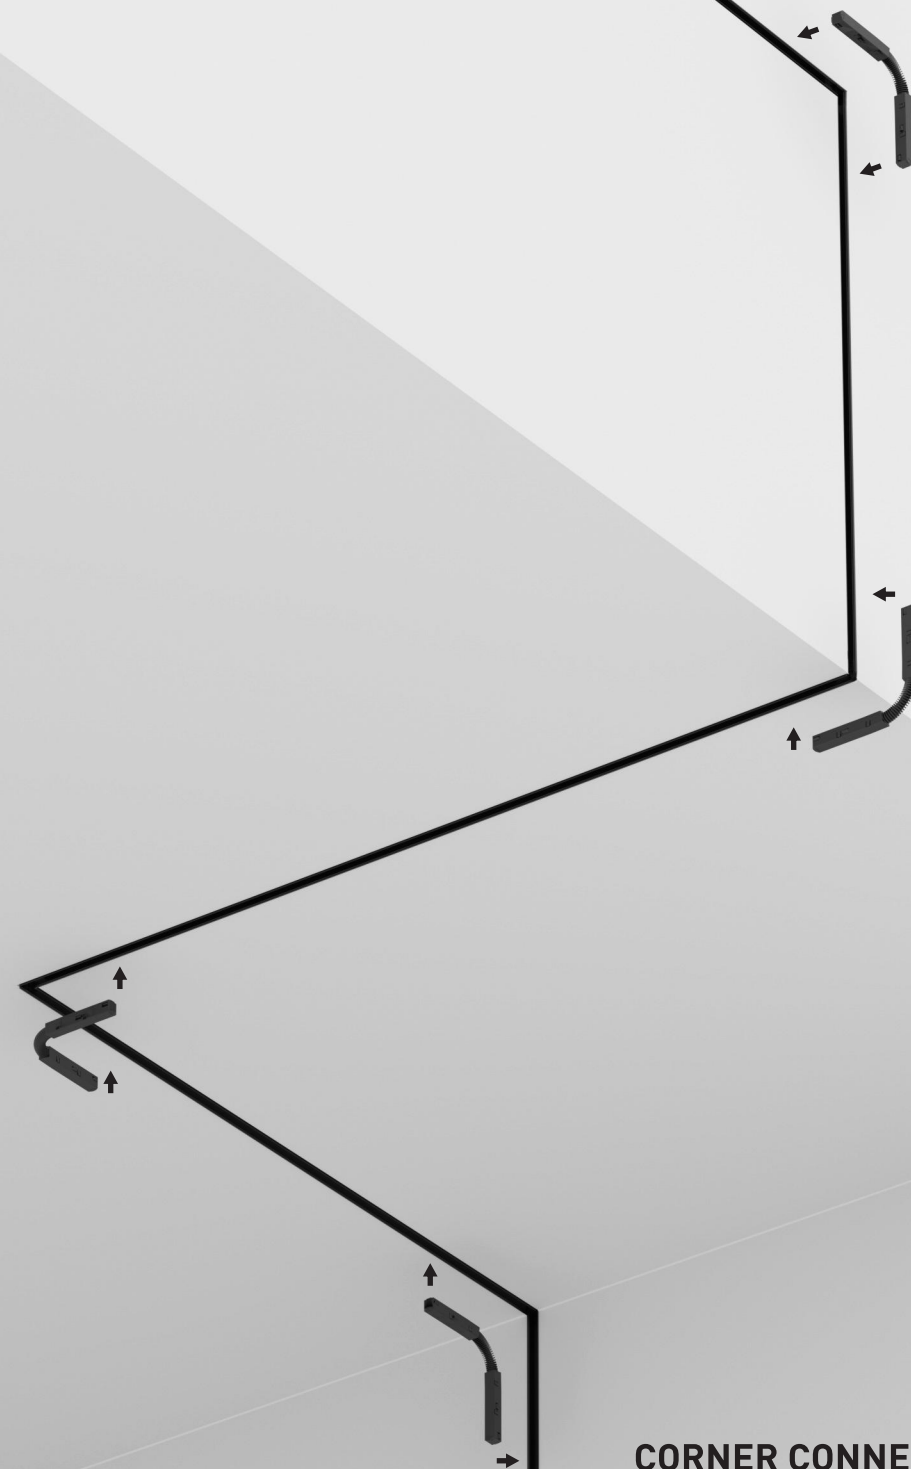

CORNER CONNECTOR

Make it 3D lighting to enhance your space experience with the flexible corner connectors.



SMART CONTROL GEAR

Our magnetic track system supports wired and wireless smart controls, compatible with all major protocols, offering versatile and seamless integration for diverse applications.



- Powered by

Powered by
Tuuya
- 
Zigbee
- 
WiFi
- 
Bluetooth
- 
DALI
- 
Dimmable
0.1%-100%
- 
2700K 6000K
CCT
- 
On / Off
ON/OFF



48V Magnetic Track System

Featuring two track rail profiles of different widths and compatible lighting modules, the 48V magnetic lighting is flexible for various spaces. With a wide selection of profiles, tracks, connections, installation types, light modules, and control options, the magnetic track system is the ultimate all-in-one solution for demanding architects, interior designers, and lighting designers.



20mm-Magnetic Track




15mm-Magnetic Track

CONTENTS


20mm-Magnetic Track




MT20S2628
(P16)




MT20S2653
(P16)




MT20S2678
(P17)



MT20R7255
(P17)




MT20R6155
(P18)




MT20R10354
(P18)

20mm-Magnetic Luminaire


VEGA-01
(P20)



VEGA-02
(P22)




VEGA-03
(P24)




XXX-01
(P26)




LUME-01
(P28)




XXX-01
(P30)




LATTICE-01
(P32)




LATTICE-02
(P34)



WASH-01
(P36)




NOVA-Cylinder
(P38)




NOVA-Orb
(P40)



NOVA-Loop
(P42)



NOVA-Prism
(P44)



All models fit 15mm&20mm Tracks

15mm-Magnetic Track



MT15S2849
(P45)




MT15R5548A
(P45)




MT15R5548B
(P46)

15mm-Magnetic Luminaire


LUME-02
(P48)




LATTICE-03
(P50)



LATTICE-04
(P52)



WASH-02
(P54)



All models fit 15mm&20mm Tracks

ENCORE
GENERAL ACCESSORIES



Corner connector module
MT-20C-CC



Three-ways connection module
MT-20C-CC2



I shape straight connection module
MT-20C-IC



Conductive module (Input)
MT-20C-IM05M
MT-20C-IM20M



Protective cover
MT-20PC



Long driver module
MT-20C-LA184



Short driver module
MT-20C-LA112



Long driver module (with lock and magnet)
MT-20CLA186A



Long driver module EVO (with lock, without magnet)
MT-20CLA186B

Note: PCB, lamp adaptors and part of accessories are shared by both 15 magnet series and 20 Magnet series. Which can make good use of every part, reducing the stock pressure.

A. A. G.
GENERAL ACCESSORIES



Corner connector module
MT-20C-CC-A



Three-ways connection module
MT-20C-CC2-A



I shape straight connection module
MT-20C-IC-A



Conductive module (Input)
MT-20C-IM05M-A
MT-20C-IM20M-A



Protective cover
MT-20PC-A



Long driver module
MT-20C-LA168-A




Short driver module
MT-20C-LA98-A



MT20S2628

Surface-mounted



DATE

Length: 1000mm / 2000mm / 3000mm
Finishes: Black / White / Custom

TRACK ACCESSORIES



L-joint 90°
MT20S2628-LJ



In corner
MT20S2628-IN



Out corner
MT20S2628-OT



End cap
MT20S2628-EC



Suspension bucket
MT20S2628-PT



Surface buckle
MT20S2628-SF





M- Connect plate
MT20S2628-MJ



MT20S2653


Surface-mounted




DATE

Length: 1000mm / 2000mm / 3000mm
Finishes: Black / White / Custom

TRACK ACCESSORIES



L-joint 90°
MT20S2653-LJ



In corner
MT20S2653-IN



Out corner
MT20S2653-OT



End cap
MT20S2653-EC



Suspension bucket
MT20S2653-PT



Surface buckle
MT20S2653-SF





M- Connect plate
MT20S2653-MJ



MT20S2678

Pendant



DATE

Length: 1000mm / 2000mm / 3000mm
 Finishes: Black / White / Custom

TRACK ACCESSORIES



L-joint 90°
 MT20S2678-LJ



End cap
 MT20S2678-EC



Suspension bucket
 MT20S2678-PT045



Suspension bucket
 MT20S2678-PT





M- Connect plate
 MT20S2678-MJ



MT20R7255

Pre-fit Recessed-mounted



DATE

Length: 1000mm / 2000mm / 3000mm
 Finishes: Black / White / Custom


TRACK ACCESSORIES




L-joint 90°
 MT20R7255-LJ




In corner
 MT20R7255-IN




Out corner
 MT20R7255-OT



Tee angle
 MT20R7255-T90



Cross corner
 MT20R7255-C90



End cap
 MT20R7255-EC





L- Connect plate
 MT20R7255-FJ



MT20R6155


Pre-fit Recessed-mounted




DATE

Length: 1000mm / 2000mm / 3000mm
 Finishes: Black / White / Custom


TRACK ACCESSORIES




L-joint 90°
 MT20R6155-LJ




In corner
 MT20R6155-IN




Out corner
 MT20R6155-OT



Tee angle
 MT20R6155-T90



Cross corner
 MT20R6155-C90



End cap
 MT20R6155-EC





L- Connect plate
 MT20R6155-FJ



MT20R10354


Pre-fit Recessed-mounted



DATE

Length: 1000mm / 2000mm / 3000mm
 Finishes: Black / White / Custom

TRACK ACCESSORIES




L-joint 90°
 MT20R10354-LJ




In corner
 MT20R10354-IN




Out corner
 MT20R10354-OT



Tee angle
 MT20R10354-T90



Cross corner
 MT20R10354-C90



End cap
 MT20R10354-EC



L- Connect plate
 MT20R10354-FJ



VEGA-01

Power: 8W / 15W / 20W
Voltage: DC48V
Beam optics: 15°, 24°, 38°, 50°
Color quality: CRI 90+
Light color: 2700K, 3000K, 3500K, 4000K




All models fit 15mm&20mm Tracks

PHOTOMETRIC DATA (NON-DIMMING)


POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
8W	3000K	90	15°	579	64
			24°	594	65
			38°	589	65
			50°	579	64
15W	3000K	90	15°		
			24°		
			38°		
			50°		
20W	3000K	90	15°	1681	81
			24°	1699	84
			38°	1761	85
			50°	1614	80

LIGHT DISTRIBUTION

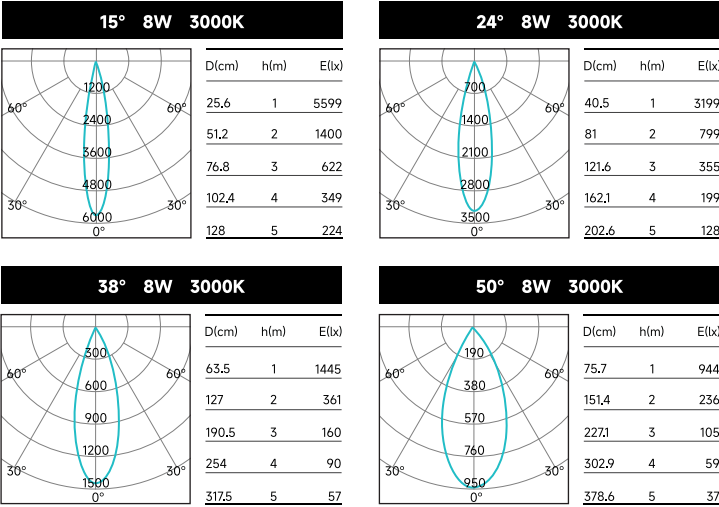


DIMENSION

M20-VE01T-08



M20-VE01T-15
M20-VE01T-20





Color: ■ Black □ White

All models fit 15mm&20mm Tracks

VEGA-02

Power: 10W / 15W / 20W
Voltage: DC48V
Beam optics: 10°-60°(10W), 20°-60°(15W/20W)
Color quality: CRI 90+
Light color: 2700K, 3000K, 3500K, 4000K




PHOTOMETRIC DATA (NON-DIMMING)





POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
8W	3000K	90	10°	655	61
			60°	687	64
15W	3000K	90	20°		
			60°		
20W	3000K	90	20°	1374	64
			60°	1510	71

DIMENSION

M20-VE02T-10
M20-VE02T-15
M20-VE02T-20




LIGHT DISTRIBUTION

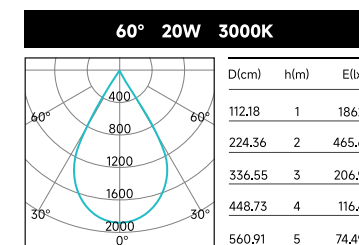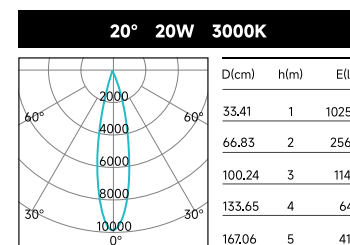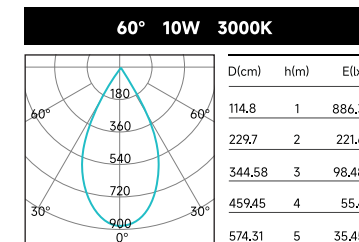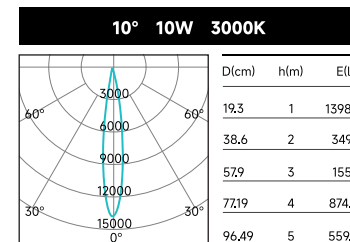




1 Framing Patterns



2 Clear or Soft Outline



3 Light Beam

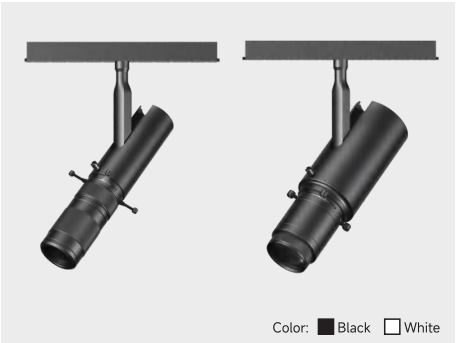

VEGA-03

Power: 10W / 20W
Voltage: DC48V
Beam optics: 15°-36°(10W), 55°(20W)
Color quality: CRI 90+
Light color: 2700K, 3000K, 3500K, 4000K




All models fit 15mm&20mm Tracks

PHOTOMETRIC DATA (NON-DIMMING)


POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
10W	3000K	90	15°	263	24
			36°	360	33
20W	3000K	90	55°	533	27

LIGHT DISTRIBUTION

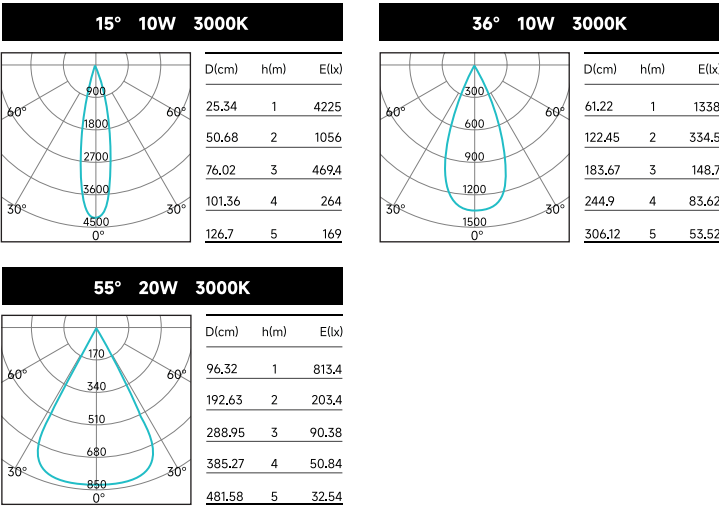



DIMENSION

M20-VE03T-10



M20-VE03T-20



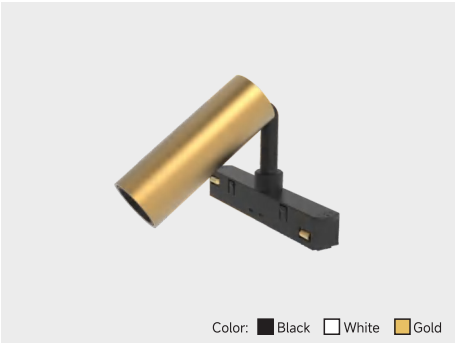

All models fit 15mm&20mm Tracks

VEGA-04

Power: 5W
Voltage: DC48V
Beam optics: 18°, 24°, 36°
Color quality: CRI 90+
Light color: 3000K, 4000K, 5000K




PHOTOMETRIC DATA (NON-DIMMING)




POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
5W	3000K	90	18°	418	69
			24°	422	73
			36°	416	67

DIMENSION

M20-VE04T-05



LIGHT DISTRIBUTION





LUME-01



Power: 7W / 15W
Voltage: DC48V
Beam optics: 110°
Color quality: CRI 90+
Light color: 3000K, 4000K





PHOTOMETRIC DATA (NON-DIMMING)

POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
7W	3000K	90	110°	288	40
15W	3000K	90	110°	571	38

LIGHT DISTRIBUTION



DIMENSION





LUME-02

Power: 5W
Voltage: DC48V
Beam optics: 110°
Color quality: CRI 90+
Light color: 3000K, 4000K




PHOTOMETRIC DATA (NON-DIMMING)


POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
5W	3000K	90	110°	460	92

DIMENSION

M20-LU02D-05



LIGHT DISTRIBUTION

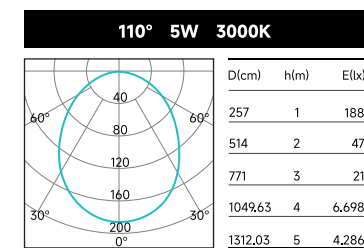



LATTICE-01



Power: 6W / 12W
Voltage: DC48V
Beam optics: 28°, 48°
Color quality: CRI 90+
Light color: 3000K, 4000K






PHOTOMETRIC DATA (NON-DIMMING)

POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
6W	3000K	90	28°	407	76
12W	3000K	90	28° 48°	851 926	75 82

DIMENSION



LIGHT DISTRIBUTION





LATTICE-02




Power: 6W / 12W
Voltage: DC48V
Beam optics: 28°, 48°
Color quality: CRI 90+
Light color: 3000K, 4000K



PHOTOMETRIC DATA (NON-DIMMING)



POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
6W	3000K	90	28°	412	79
12W	3000K	90	28°	851	75
			48°	926	82

LIGHT DISTRIBUTION

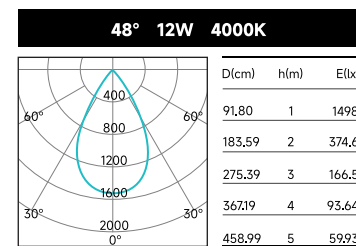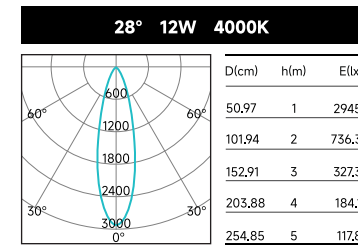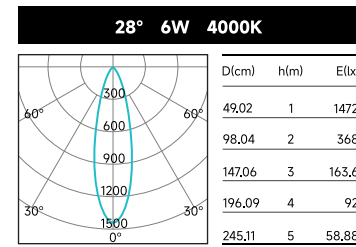


DIMENSION

M20-LA02D-06



M20-LA02D-12





Color: ■ Black □ White

WASH-01


Power: 12W
Voltage: DC48V
Beam optics: Polarized 8°
Color quality: CRI 90+
Light color: 3000K, 4000K



PHOTOMETRIC DATA (NON-DIMMING)


POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
12W	3000K	90	Polarized 8°	1058	89

LIGHT DISTRIBUTION



DIMENSION

M20-WA01T-12

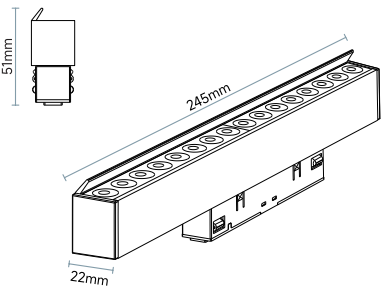



Color: ■ Black □ White

All models fit 15mm&20mm Tracks

NOVA-Cylinder


Power: 8W / 12W
Voltage: DC48V
Beam optics: 15°, 24°, 36°, 50°
Color quality: CRI 90+
Light color: 3000K, 4000K




PHOTOMETRIC DATA (NON-DIMMING)

POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
8W	3000K	90	15°	281	46
			24°	289	47
			36°	268	44
			50°	245	40
12W	3000K	90	15°	950	72
			24°	993	75
			36°	977	74
			50°	965	73

DIMENSION

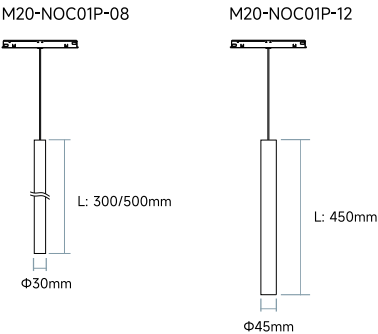

LIGHT DISTRIBUTION

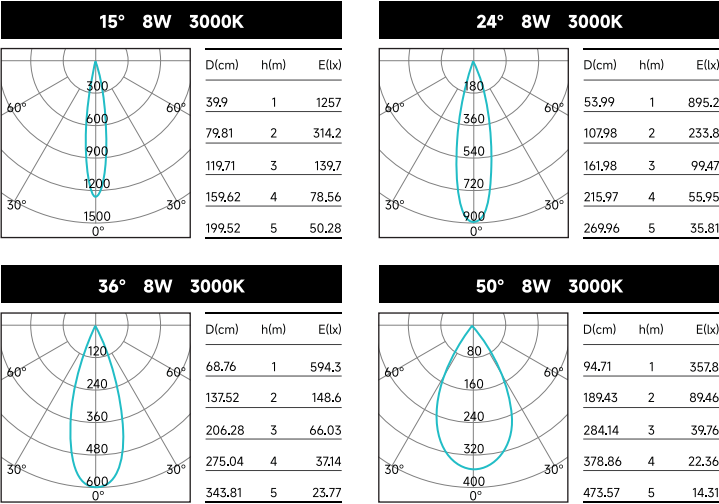



All models fit 15mm&20mm Tracks

NOVA-Orb


Power: 4W
Voltage: DC48V
Beam optics: 30°
Color quality: CRI 80+
Light color: 3000K, 4000K



PHOTOMETRIC DATA (NON-DIMMING)


POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
4W	3000K	80	30°	374	85

LIGHT DISTRIBUTION




DIMENSION

M20-NOO01P-04

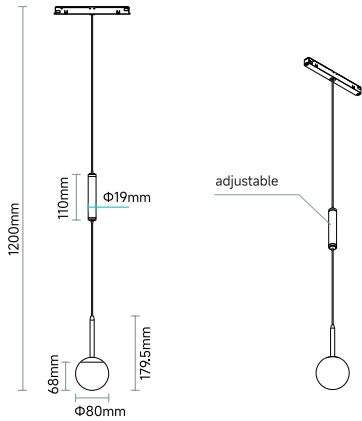

M20-NOO01D-04





All models fit 15mm&20mm Tracks

NOVA-Loop


Power: 4.5W
Voltage: DC48V
Beam optics: 110°
Color quality: CRI 90+
Light color: 3000K, 4000K



PHOTOMETRIC DATA (NON-DIMMING)


POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
4.5W	3000K	90	110°	279	54

LIGHT DISTRIBUTION

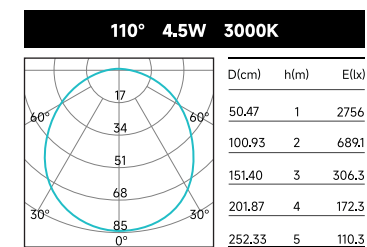

DIMENSION

M20-NOL01P-04

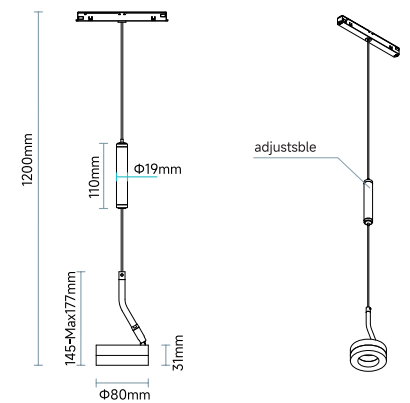



Color: ■ Black ■ Gold

All models fit 15mm&20mm Tracks

NOVA-Prism




Power: 7W
Voltage: DC48V
Beam optics: 15°, 24°, 36°
Color quality: CRI 90+
Light color: 3000K, 4000K



PHOTOMETRIC DATA (NON-DIMMING)


POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
7W	3000K	90	15°	172	26
			24°	168	25
			36°	202	31

LIGHT DISTRIBUTION



DIMENSION



M20-NOP01P-07

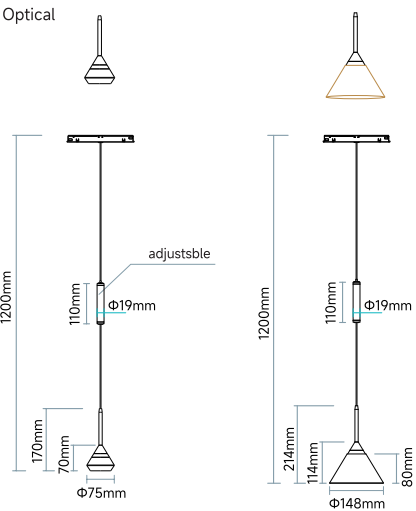



MT15S2849


Surface-mounted



DATE

Length: 1000mm / 2000mm / 3000mm
Finishes: Black / White / Custom

TRACK ACCESSORIES



L-joint 90°
MT15S2849-LJ



In corner
MT15S2849-IN



Out corner
MT15S2849-OT



End cap
MT15S2849-EC





Connect plate
MT15S2849-MJ



MT15R5548A


Pre-fit Recessed-mounted



DATE

Length: 1000mm / 2000mm / 3000mm
Finishes: Black / White / Custom


TRACK ACCESSORIES



L-joint 90°
MT15R5548A-LJ



In corner
MT15R5548A-IN



Out corner
MT15R5548A-OT



End cap
MT15R5548A-EC





Connect plate
MT15R5548A-MJ



MT15R5548B


Pre-fit Recessed-mounted




DATE

Length: 1000mm / 2000mm / 3000mm
Finishes: Black / White / Custom


TRACK ACCESSORIES



L-joint 90°
MT15R5548B-LJ



In corner
MT15R5548B-IN



Out corner
MT15R5548B-OT



End cap
MT15R5548B-EC



Connect plate
MT15R5548B-MJ



Color: ■ Black □ White

LUME-02

Power: 8W / 15W
Voltage: DC48V
Beam optics: 110°
Color quality: CRI 90+
Light color: 3000K, 4000K





All models fit 15mm&20mm Tracks

PHOTOMETRIC DATA (NON-DIMMING)


POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
8W	3000K	90	110°	243	34
15W	3000K	90	110°	919	63

LIGHT DISTRIBUTION

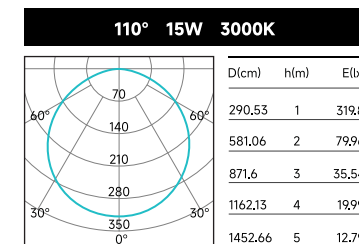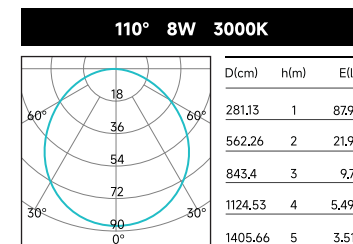


DIMENSION

M15-LU02D-08



M15-LU02D-15





Color: ■ Black □ White

LATTICE-03

Power: 10W / 15W
Voltage: DC48V
Beam optics: 32°
Color quality: CRI 90+
Light color: 3000K, 4000K





All models fit 15mm&20mm Tracks

PHOTOMETRIC DATA (NON-DIMMING)



POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
10W	3000K	90	32°	687	76
15W	3000K	90	32°	1057	75

DIMENSION


M15-LA03D-10




LIGHT DISTRIBUTION

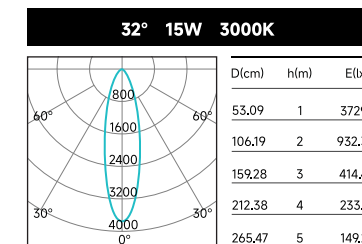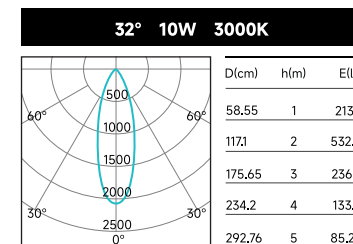

M15-LA03D-15



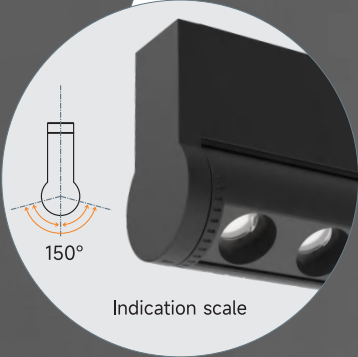

Color: ■ Black □ White

LATTICE-04

Power: 10W / 15W
Voltage: DC48V
Beam optics: 32°
Color quality: CRI 90+
Light color: 3000K, 4000K




All models fit 15mm&20mm Tracks

PHOTOMETRIC DATA (NON-DIMMING)



POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
10W	3000K	90	32°	685	74
15W	3000K	90	32°	1208	85

DIMENSION

M15-LA04D-10



LIGHT DISTRIBUTION



M15-LA04D-15





All models fit 15mm&20mm Tracks

WASH-02


Power: 12W
Voltage: DC48V
Beam optics: Polarized 8°
Color quality: CRI 90+
Light color: 3000K, 4000K



PHOTOMETRIC DATA (NON-DIMMING)



POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
12W	3000K	90	Polarized 8°	1018	87

LIGHT DISTRIBUTION




DIMENSION

M15-WA02T-12



24V Magnetic Track System

The 24V magnetic system with an ultra-slim 5mm profile is ideal for residential spaces. Not only does it provide exceptional illumination, but it also offers unmatched flexibility and endless possibilities for creative space design. Available in linear and spot configurations, the system can be customized to suit any aesthetic or functional need.

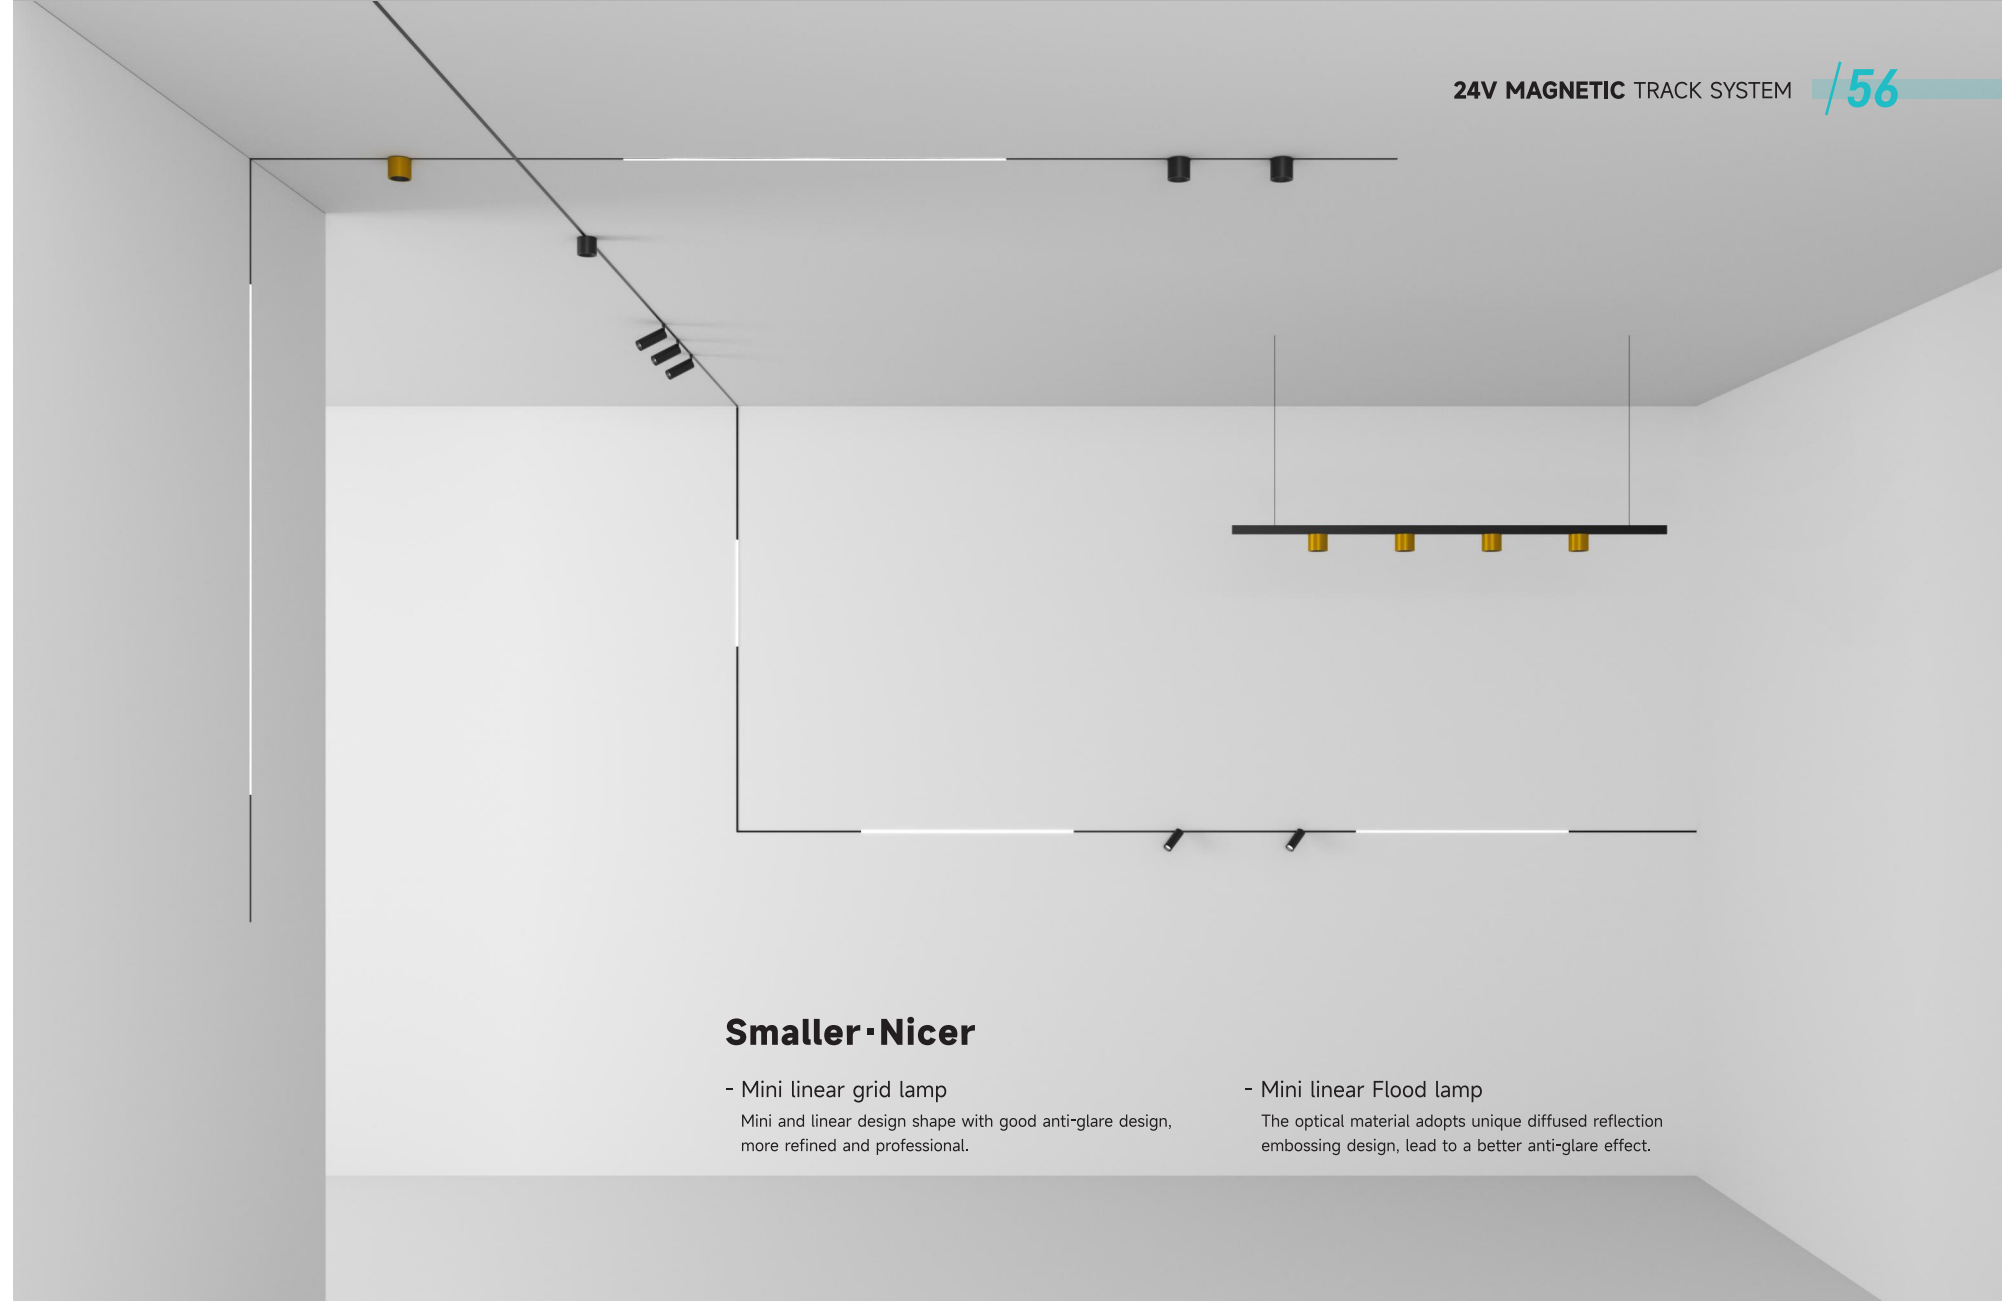

Smaller·Nicer

- Mini linear grid lamp

Mini and linear design shape with good anti-glare design, more refined and professional.

- Mini linear Flood lamp

The optical material adopts unique diffused reflection embossing design, lead to a better anti-glare effect.




5mm-Magnetic Track

CONTENTS


5mm-Magnetic Track



MT05S1120
(P59)




MT05R4720
(P59)




MT05R4721
(P60)

5mm-Magnetic Luminaire


SIMO-01
(P62)




AURA-01
(P64)

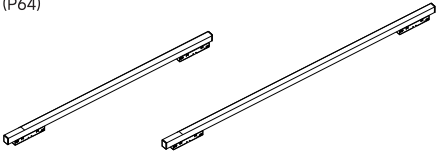


AURA-02
(P66)




GRIDIS-01
(P68)

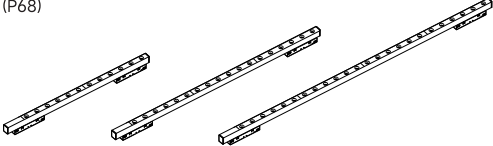

GRIDIS-02
(P70)




GRIDIS-03
(P72)



DISC-01
(P74)




DISC-02
(P76)



DISC-03
(P78)





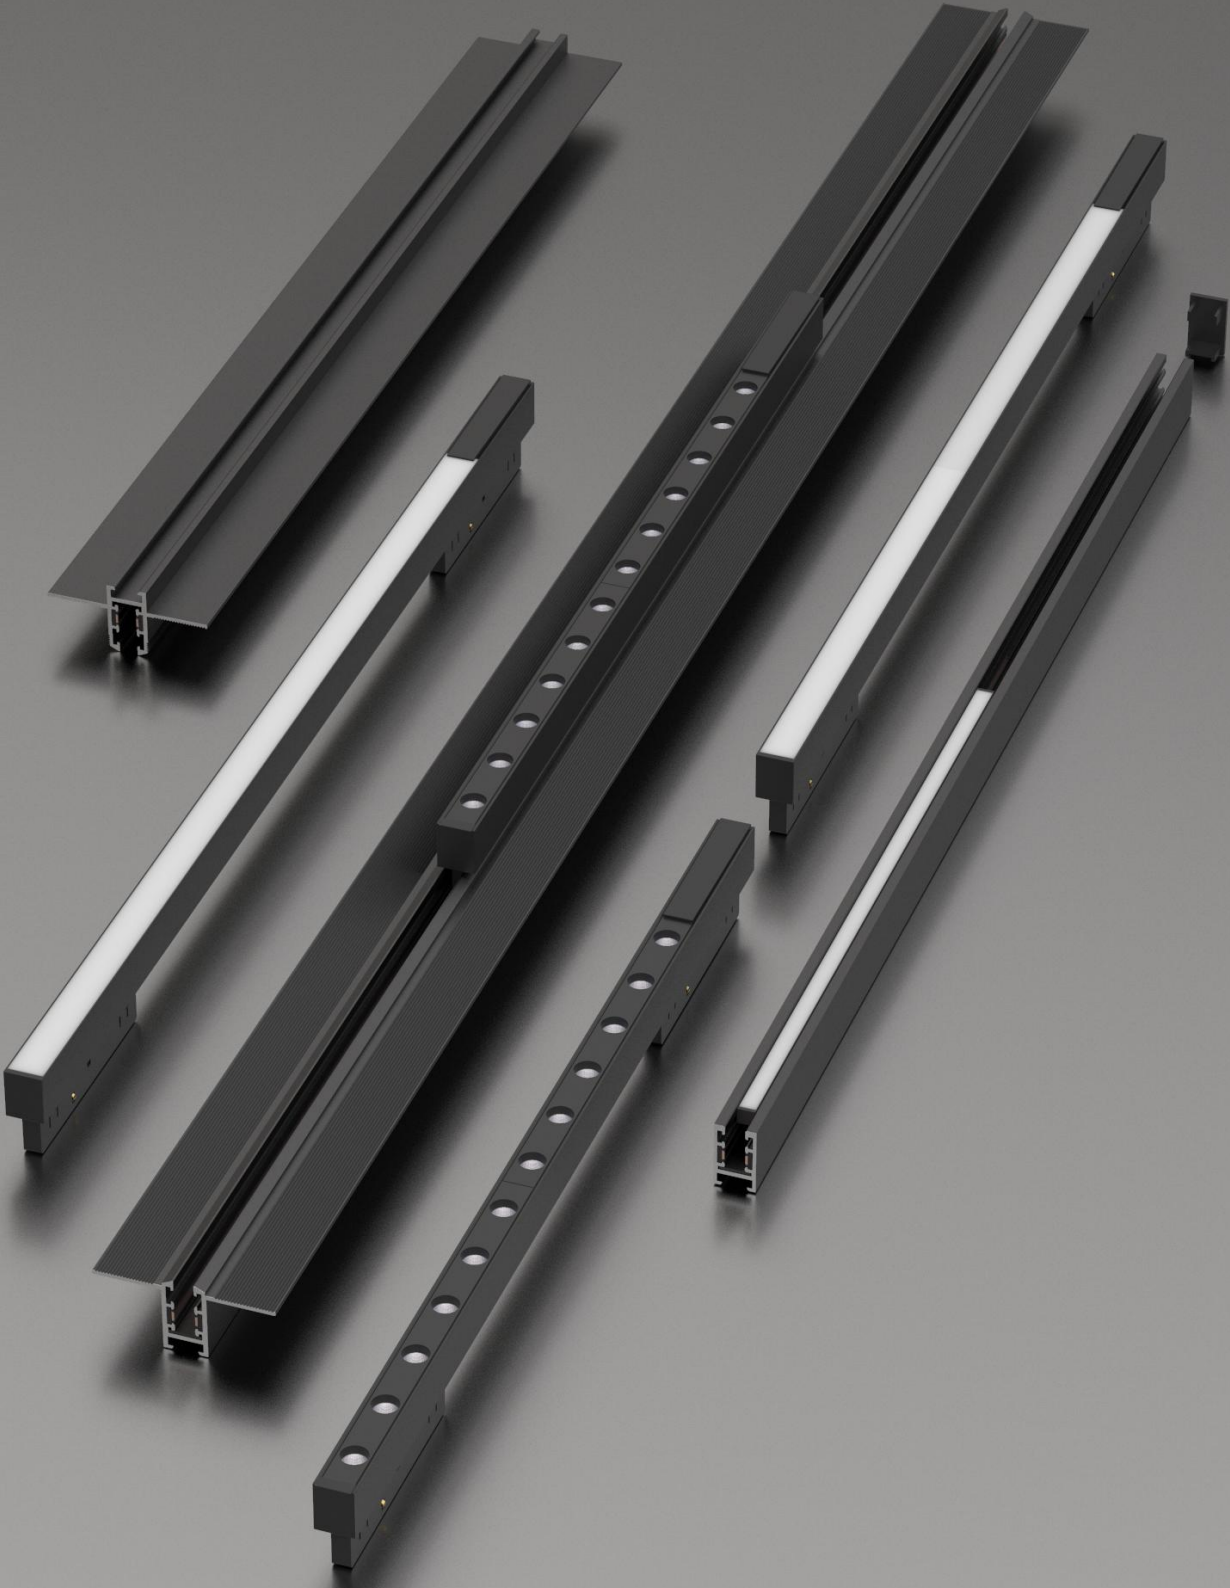



MT05S1120

Surface-mounted



DATE

Length: 1000mm / 2000mm / 3000mm
Finishes: Black / White / Custom

TRACK ACCESSORIES



L-joint 90°
MT05S1120-LJ



In corner
MT05S1120-IN



Out corner
MT05S1120-OT



Cross corner
MT05S1120-C90



End cap
MT05S1120-EC



Suspension bucket
MT05S1120-PT





M- Connect plate
MT05S1120-MJ



MT05R4720


Pre-fit Recessed-mounted



DATE

Length: 1000mm / 2000mm / 3000mm
Finishes: Black / White / Custom

TRACK ACCESSORIES




L-joint 90°
MT05R4720-LJ



In corner
MT05R4720-IN



Out corner
MT05R4720-OT



Tee angle
MT05R4720-T90



Cross corner
MT05R4720-C90



End cap
MT05R4720-EC




M- Connect plate
MT05R4720-MJ



MT05R4721

Pre-fit Recessed-mounted



DATE

Length: 1000mm / 2000mm / 3000mm
Finishes: Black / White / Custom

TRACK ACCESSORIES



L-joint 90°
MT05R4721-LJ



In corner
MT05R4721-IN



Out corner
MT05R4721-OT



Tee angle
MT05R4721-T90



Cross corner
MT05R4721-C90



End cap
MT05R4721-EC



M- Connect plate
MT05R4721-MJ

5mm-MAGNETIC ACCESSORIES



Short driver module
MT-05C-LA60



Long driver module
MT-05C-LA112



Input conductive module
(with wire 0.5M/2M)
MT-05C-IM05M




Soft conductive module
MT-05C-CC



SIMO-01



Power: 5W / 10W
Voltage: DC24V
Beam optics: 24°
Color quality: CRI 90+
Light color: 3000K, 4000K





PHOTOMETRIC DATA (NON-DIMMING)

POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
5W	3000K	90	24°	390	83
10W	3000K	90	24°	566	65

LIGHT DISTRIBUTION




DIMENSION





AURA-01



Power: 5W / 10W
Voltage: DC24V
Beam optics: 110°
Color quality: CRI 90+
Light color: 3000K, 4000K



PHOTOMETRIC DATA (NON-DIMMING)

POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
5W	3000K	90	110°	222	47
10W	3000K	90	110°	455	45

LIGHT DISTRIBUTION





DIMENSION

M05-AU01D-05



M05-AU01D-10



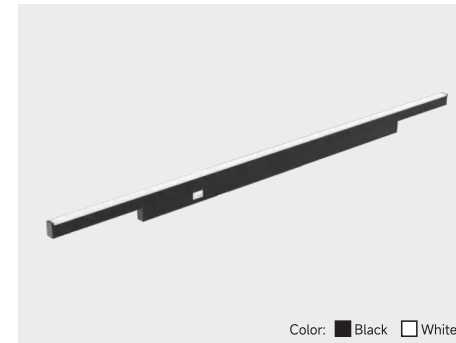

AURA-02


Power: 5W
Voltage: DC24V
Beam optics: 90°
Color quality: CRI 90+
Light color: 3000K, 4000K




PHOTOMETRIC DATA (NON-DIMMING)

POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
5W	3000K	90	90°	225	48

LIGHT DISTRIBUTION

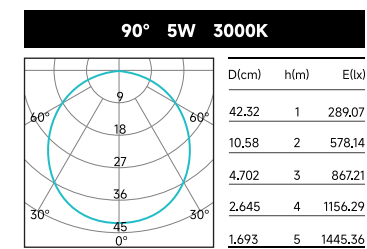


DIMENSION

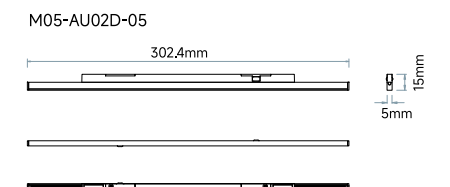



GRIDIS-01




Power: 5W / 8W / 12W
 Voltage: DC24V
 Beam optics: 36°
 Color quality: CRI 90+
 Light color: 3000K, 4000K






PHOTOMETRIC DATA (NON-DIMMING)

POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
5W	3000K	90	36°	215	48
8W	3000K	90	36°	359	48
12W	3000K	90	36°	515	46

LIGHT DISTRIBUTION



DIMENSION






Color: ■ Black □ White

GRIDIS-02


Power: 8W
Voltage: DC24V
Beam optics: 40°
Color quality: CRI 90+
Light color: 3000K, 4000K



PHOTOMETRIC DATA (NON-DIMMING)


POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
8W	3000K	90	40°	563	59

LIGHT DISTRIBUTION



DIMENSION


M05-GR02D-08





GRIDIS-03


Power: 8W
Voltage: DC24V
Beam optics: 50°
Color quality: CRI 90+
Light color: 3000K, 4000K




PHOTOMETRIC DATA (NON-DIMMING)

POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
8W	3000K	90	50°	507	60

LIGHT DISTRIBUTION



DIMENSION

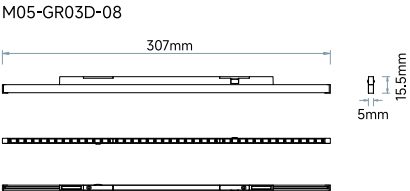



Color: ☒ Black ☐ White ☐ Gold

DISC-01


Power: 9W
Voltage: DC24V
Beam optics: 15°, 24°, 36°
Color quality: CRI 90+
Light color: 3000K, 4000K



PHOTOMETRIC DATA (NON-DIMMING)


POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
9W	3000K	90	24°	611	74

LIGHT DISTRIBUTION

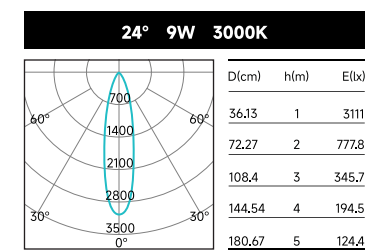

DIMENSION


M05-DI01S-09

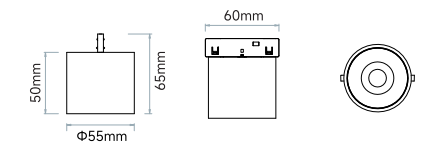



DISC-02


Power: 9W
Voltage: DC24V
Beam optics: 15°, 24°, 36°
Color quality: CRI 90+
Light color: 3000K, 4000K




PHOTOMETRIC DATA (NON-DIMMING)

POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
9W	3000K	90	24°	611	74

LIGHT DISTRIBUTION




DIMENSION

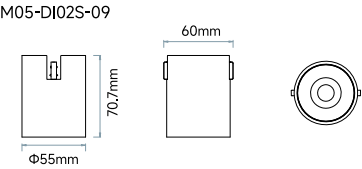



DISC-03


Power: 3W
Voltage: DC24V
Beam optics: 24°
Color quality: CRI 90+
Light color: 3000K, 4000K



PHOTOMETRIC DATA (NON-DIMMING)


POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)
3W	3000K	90	24°	191	66


LIGHT DISTRIBUTION



DIMENSION

M05-DI03S-03





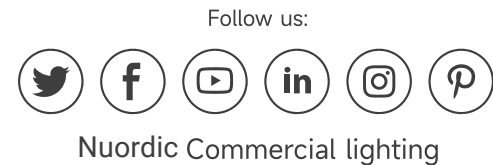

You can also visit our website and follow us on social media for the latest updates on Nuordic.

Official Website

On our website, you'll find the latest company news, product releases, technology updates, detailed product information, videos, and everything else you need.

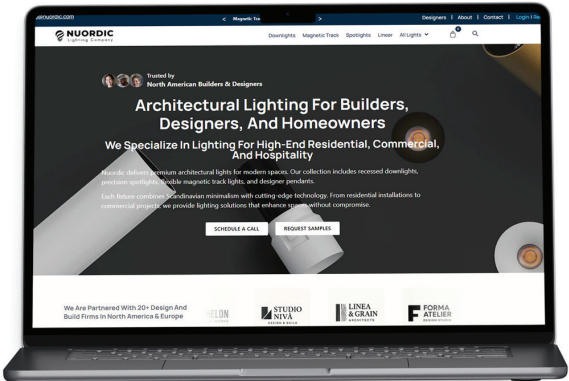

YouTube

On Youtube you can get all of our product features, installation tutorials, light effect demonstrations and a series of actual demonstration videos you want to know about our products.

