


PROJECT NAME:	TYPE:
---------------	-------

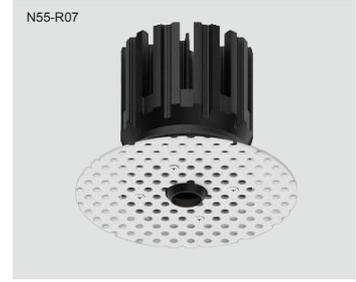

9mm Pinhole

N55 - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

MODEL	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES	
N55	R	07	QT Drywall Trimless	W White	B Black	B Bridgelux	90 90+ CRI 15 Watts Lumens Divd.-1320	27  2700K 30  3000K 35  3500K 40  4000K	40°	CMEM55 On/Off; Triac PhaseDim; 120VAC KIG On/Off; Triac Phase Dim; 120/277VAC <i>*Remote Placed</i>	NCP New Con Bracket NCBX IC Box BRKT Rough-in Plate	
							97 97+ CRI 15 Watts Lumens Divd.-915	2765A  2700K  3000K  4000K  5000K  6500K <i>*External 5CCT Selector</i>				40°

N55-R07-QT-W-B-B-97-30-40-CMEM55-NCBX

Accessories

Brackets for New-Construction (4-legs)




N-NCP-SR3-R21

Cut out:

- Round: Ø 3" (Ø 77mm)
- Ø 2" (Ø 62mm)
- Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

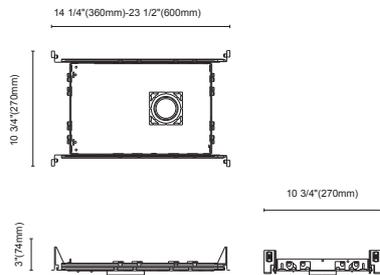

IC-BOX for New-Construction (4-legs)




N-NCBX-SR3-R21


Cut out:

- Round: Ø 3" (Ø 77mm)
- Ø 2" (Ø 62mm)
- Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

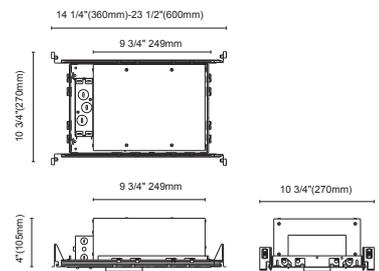

Cut out

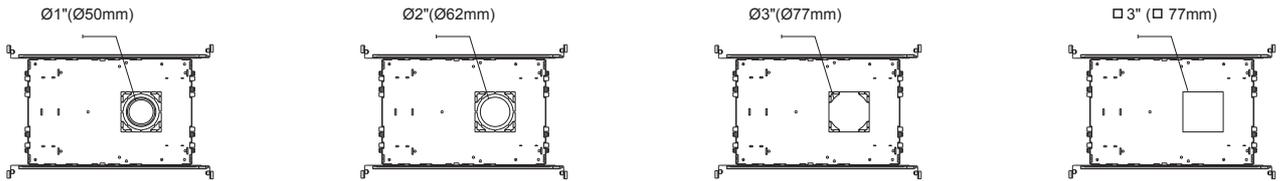


Brackets for New-Construction



N-BRKT-R60A

Cut out:

Round: Ø 2" (Ø 62mm*2)

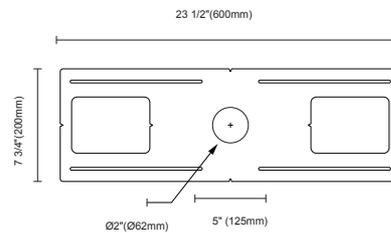


Remark

Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

For more information, please get in touch with sales.

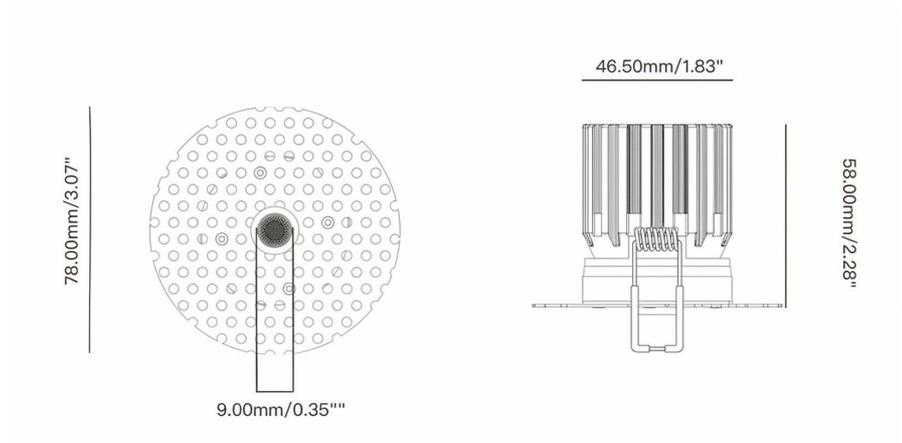




1. Cutout on the ceiling
cutout size: **D55mm(2.17")**



2. Wire the driver




3. Plug in the light



4. Install the lamp,



5. Install the masking plug

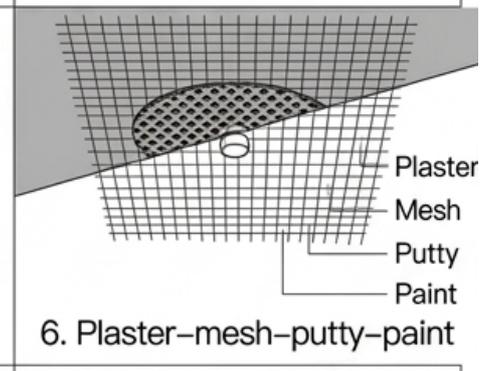



6. Plaster-mesh-putty-paint



7. After the paint dry enough,
remove the masking plug
from the aperture.



8. Done

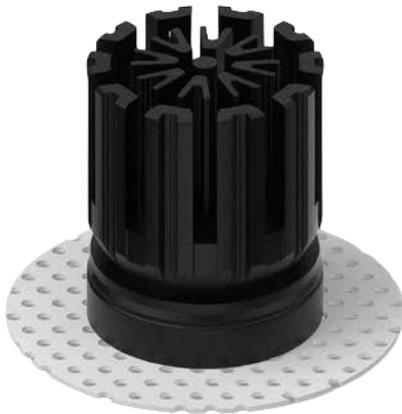

Optical Parameters

Light Source	LED COB
Lumens	30lm/W
CRI	97Ra
CCT	2700K ● 3000K ● 3500K ● 4000K ○
Beam Angle	45°
UGR	< 6
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

Basic Information

Model	N55-R07
Mounting	Recessed
Trim Finishing Color	White
Reflector Color	Black
Material	Pure aluminum 6063
Cutout Size	55mm
Light Direction	Pinhole
IP Rating	IP20
Power	Max. 10W
Input Voltage	DC36V
Input Current	Max. 250mA