


PROJECT NAME:	TYPE:
---------------	-------

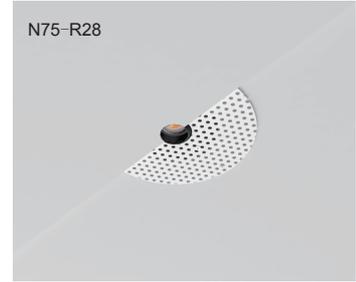


# 0.8" Pinhole

N75 - - - - -


MODEL	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
N75	R Round	28	QT Trimless Drywall	W White	B Black	B Bridgelux	<b>90</b> 90+ CRI 12 Watts Lumens Divd.-1056	<b>27</b>  2700K <b>30</b>  3000K <b>35</b>  3500K <b>40</b>  4000K	<b>50</b> 50°	<b>CMEM55</b> On/Off; Triac PhaseDim; 0-10V Dim 120VAC  <b>KIG</b> On/Off; Triac Phase Dim; 0-10V Dim 120VAC  <i>*Remote Placed</i>	<b>NCP-SR3-R21</b> Non-IC Bracket  <b>NCBX-SR3-R21</b> IC Box  <b>BRKT-2SR75A</b> Non-IC Bracket for Dual Lights  <i>*For more details, pls refer to page 3</i>
							<b>97</b> 97+ CRI 12 Watts Lumens Divd.-780	<b>1830</b>  1800-3000K	<b>50</b> 50°		
							<b>Dim To Warm</b>  <b>90</b> 90+ CRI 12 Watts Lumens Divd.-660	<b>2765A</b>  2700K  3000K  4000K  5000K  6500K  <i>*External 5CCT Selector</i>	<b>50</b> 50°		
							<b>TUNABLE WHITE</b>  <b>90</b> 90+ CRI 12 Watts Lumens Divd.-840	<b>2765</b>  2700-6500K	<b>25</b> 25°		
<b>N75-R28-QT-W-W-B-97-35-50</b>											

## Photometry


**Beam angle:** 50°  
**Delivered Lumens:** 927 lumens  
**CCT:** 3000K  
**CRI:** 90  
**Power:** 12W  
**Efficacy:** 79lm/W

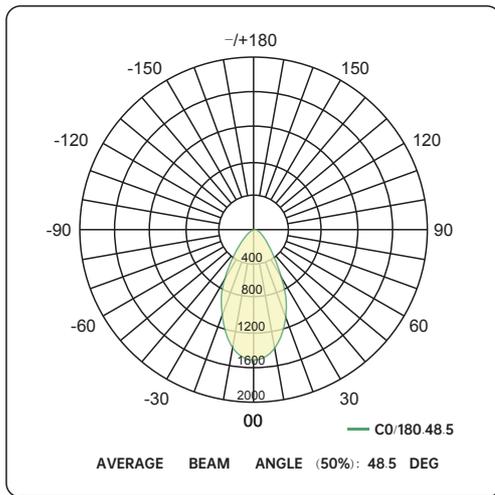

**Beam angle:** 35°  
**Delivered Lumens:** 769 lumens  
**CCT:** 3000K  
**CRI:** 97  
**Power:** 12W  
**Efficacy:** 61lm/W

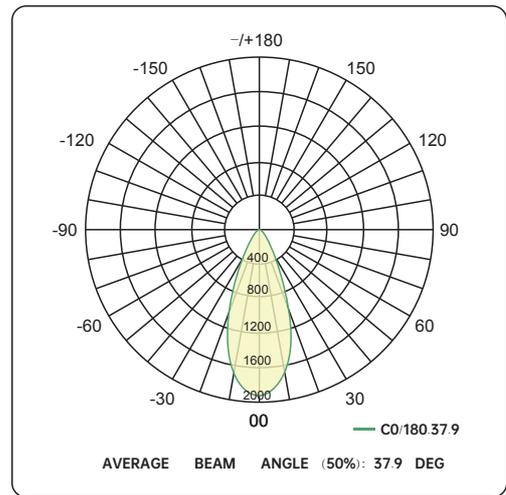

**Beam angle:** 25°  
**Delivered Lumens:** 668 lumens  
**CCT:** 3000K  
**CRI:** 97  
**Power:** 12W  
**Efficacy:** 53lm/W

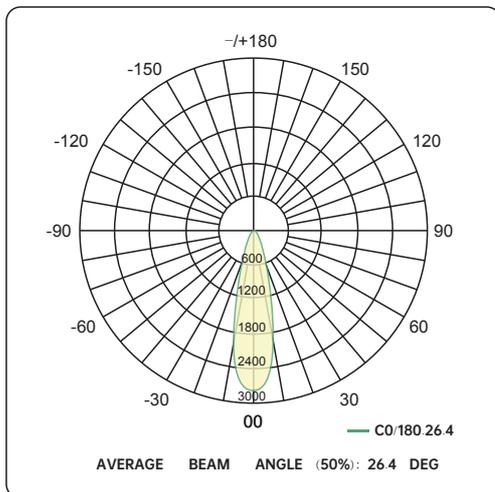

## ACCESSORIES

### Brackets for New-Construction (4-legs)




#### NCP-SR3-R21

For trim&trimless

Cut out:

- Round: Ø 3" (Ø 77mm)
- Ø 2" (Ø 62mm)
- Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

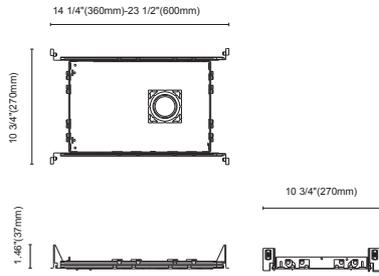

### IC-BOX for New-Construction (4-legs)




#### NCBX-SR3-R21

For trim&trimless


Cut out:

- Round: Ø 3" (Ø 77mm)
- Ø 2" (Ø 62mm)
- Ø 1" (Ø 50mm)


Square: □ 3" (□ 77mm)

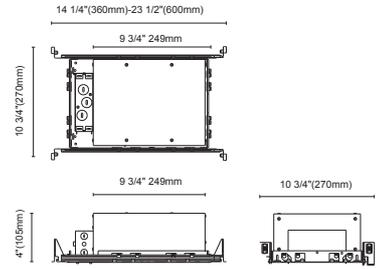

#### Cut out

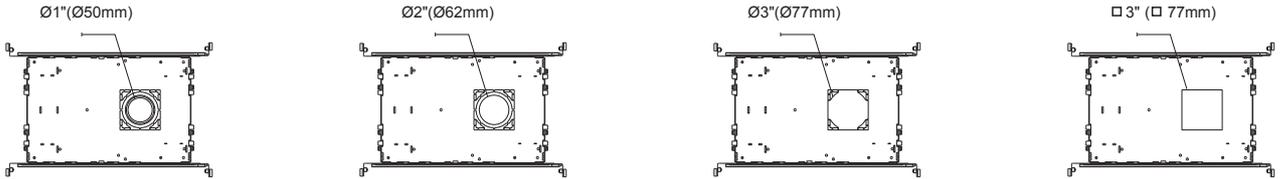

### Rough-in Plate for New-Construction




#### BRKT-2SR75A

For trim & trimless



Cut out:

- Round: Ø 77mm\*2 (Ø 77mm\*2)
- Square: □ 77mm\*2 (□ 77mm\*2)

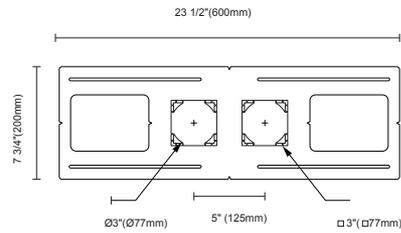

#### Remark

- Tailored brackets are available with a reasonable surcharge, details as below
- The customized bracket dimensions are still the same as the existing ones, 600\*200mm
  - Hole sizes can be customized within the range of 25-100mm
  - Holes quantity can be indicated, 1-7pcs
  - Holes positions on the bracket can be done as requests
- For more information, please get in touch with sales.

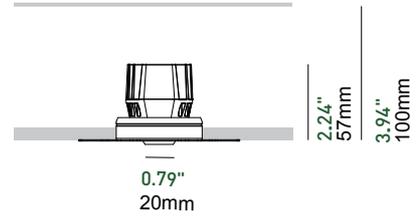

## Trimless Drywall

